

ARB 37Qt-50Qt Fridge Freezer Slide

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: 1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ 5mm Allen Wrench
- ✓ Drill Bit (optional)
- ✓ Drill (optional)
- ✓ Marker (optional)

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the hardware is included and undamaged.



Figure A

2. Position the slide inside the cab of the vehicle where mounting is desired. Pull the slide forward halfway, exposing the four mounting hole locations (Figure B).

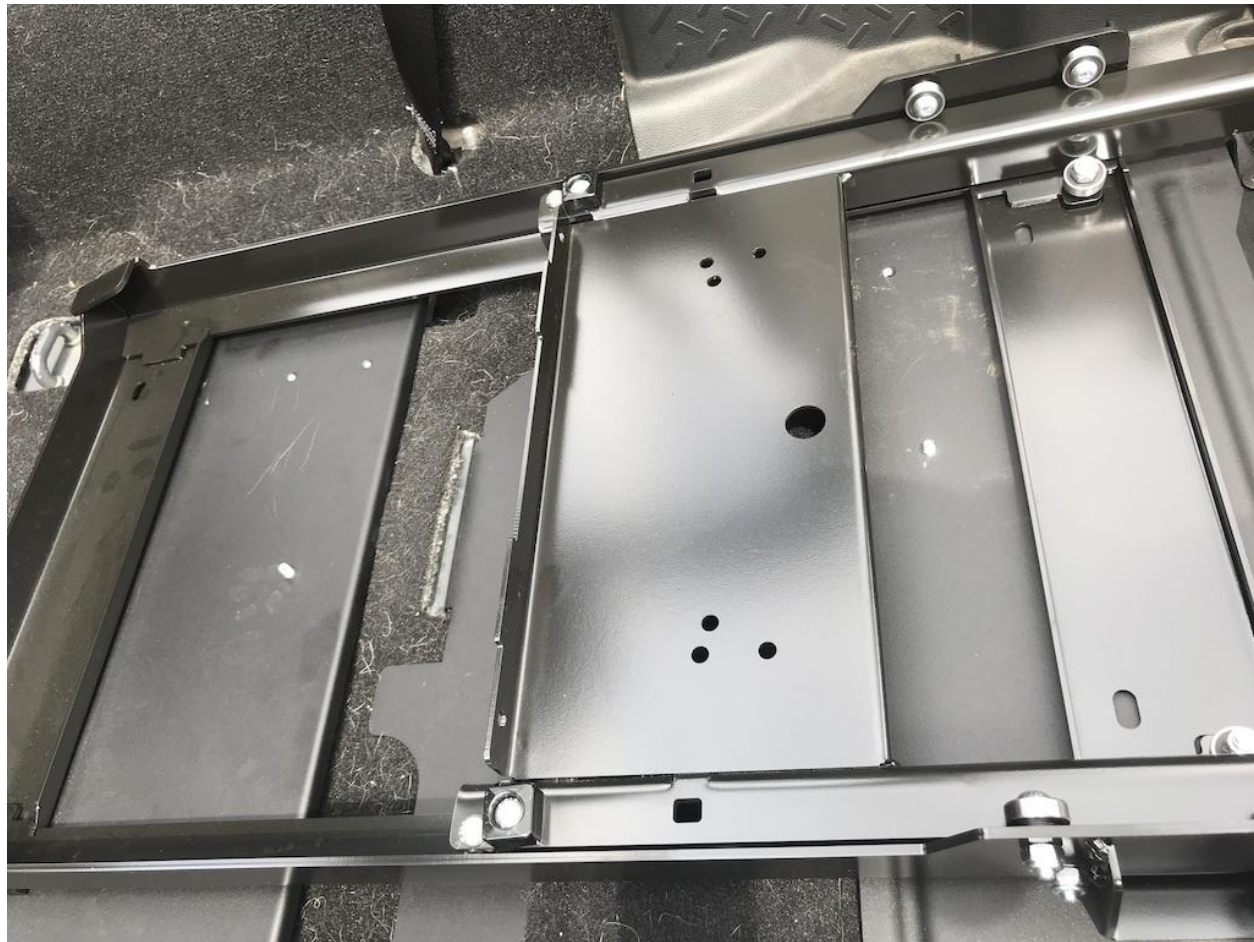


Figure B

3. **Optional: Mark all four locations with a marker (Figure C). Drill four pilot holes then mount the slide to the location using M8 hardware (not included).**



Figure C

4. Locate the feet on the bottom of the ARB fridge (Figure D).



Figure D

5. Unscrew the center bolt using a 5mm Allen wrench (Figure E).



Figure E

6. Remove all four foot-bolts (Figure F).



Figure F

7. Locate the three holes in each corner of the slide (Figure G).



Figure G

8. Thread each removed foot bolt into the adjoined bolt hole on the slide (50QT placement shown) (Figure H).



Figure H

9. Tighten all four bolts to secure the fridge to the slide (Figure I).



Figure I



Before



After