

ARB 50 Qt Transit Bag for ARB Fridge Freezer

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: 1 Hour

Tools Required:

- ✓ Box Cutter/Knife

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the transit bag and lid cover are included and undamaged.



Figure A

2. Open the lid to the ARB Fridge Freezer (Figure B).



Figure B

3. Slide the lid cover over the lid with the drawstring over top, as well and the reflective siding against the lid (Figure C).



Figure C

4. Ensure the clear plastic corner is tightly secured to both top corners of the lid (Figures D & E).



Figure D



Figure E

5. Ensure the drawstring is tucked into the recess of the hinge (Figure F).



Figure F

6. Tighten the drawstring.
7. Locate the five Velcro sections and remove the plastic to secure each section to the lid (Figure G).



Figure G

8. Place the ARB Fridge Freezer inside the bottom section (Figure H).



Figure H

9. Slip the metal tab into the recess on both sides of the rear of the fridge (Figure I).



Figure I

10. The cover should sit flush once they are inserted (Figure J).



Figure J

11. Do the same on the front two metal tabs.

12. Locate the four Velcro sections and remove the plastic to secure each section to the fridge body (Figure K).

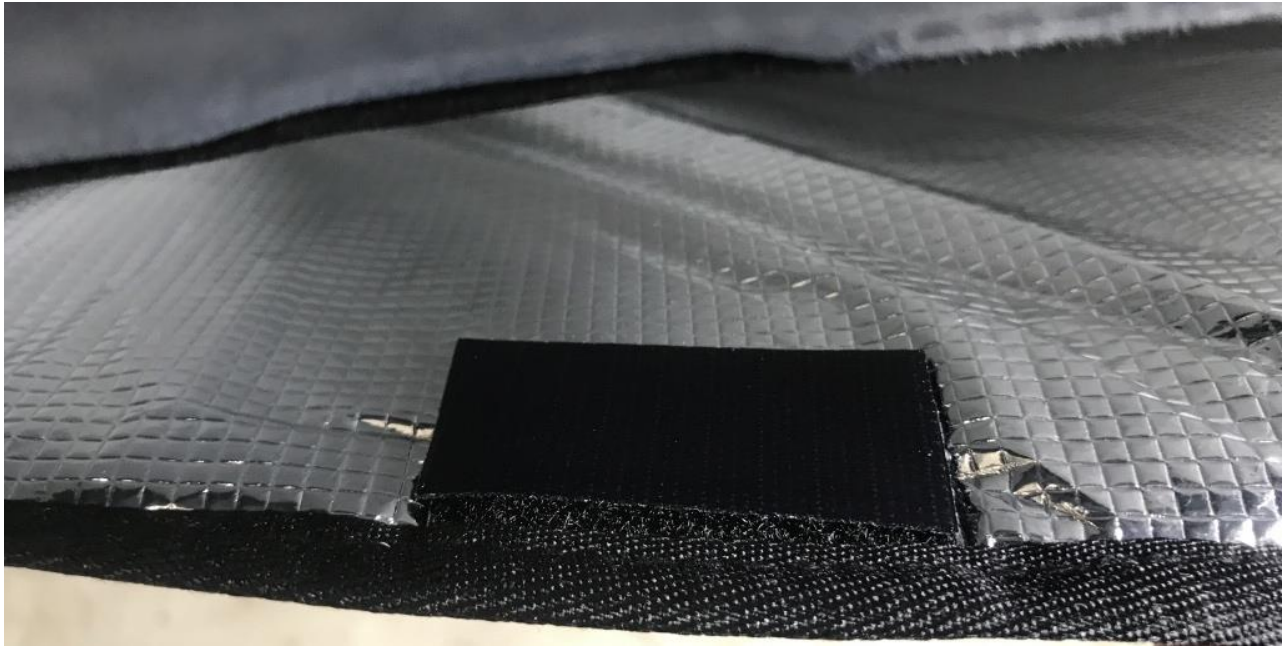


Figure K

13. Tighten the front of the bag around the sides and press into the Velcro lining (Figure L).



Figure L



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 04/16/2018