

TruShield HalfShade Top

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the top and bungees are included and undamaged.



Figure A

2. Lay the HalfShade out flat (Figure B).



Figure B

3. Remove the hard top or soft top from the vehicle.
4. Place the HalfShade over the top of the vehicle (Figure C).



Figure C

5. Run a bungee through the hole at the front of the HalfShade on the driver's side (Figure D).

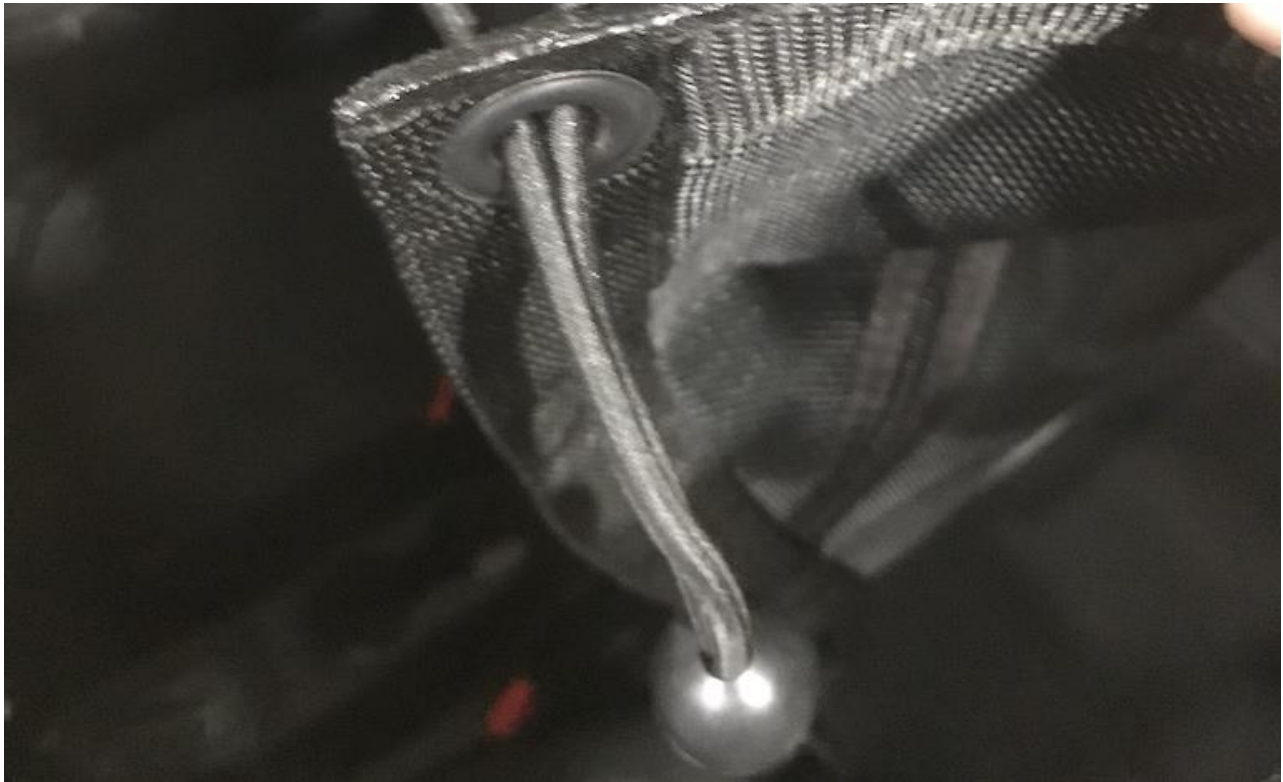


Figure D

6. Run the bungee around the front driver's side sport bar (Figure E).



Figure E

7. Repeat Steps 5 and 6 on the passenger's side sport bar (Figure F).

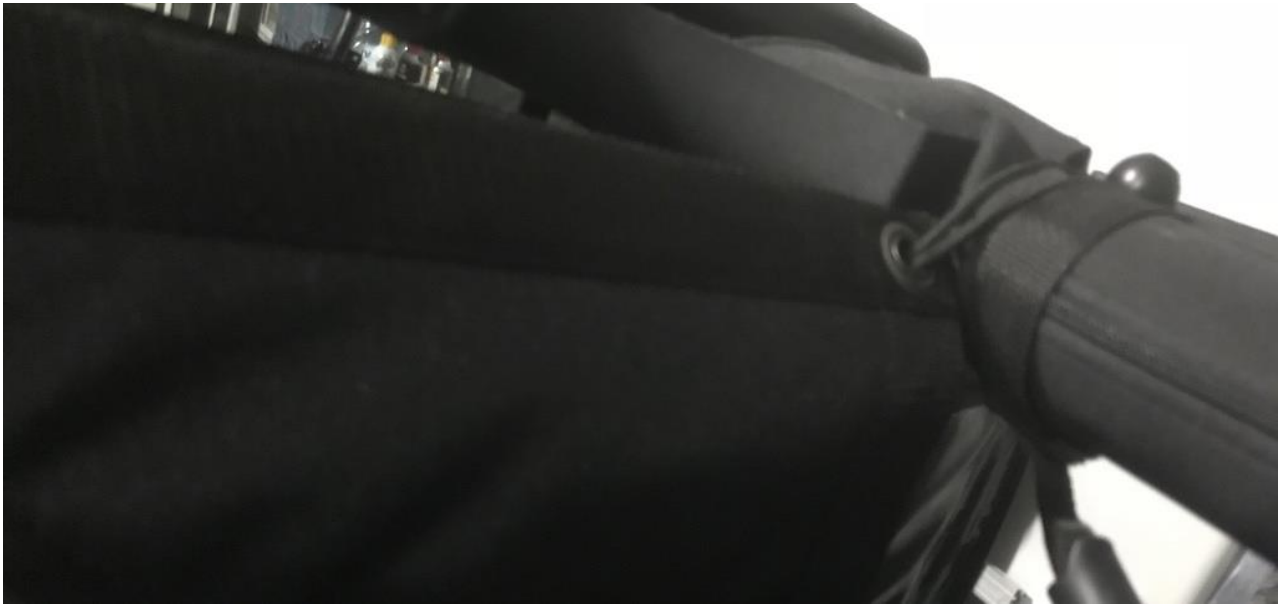


Figure F

8. Repeat Steps 5-7 further down each side, going from driver's side to passenger's side (Figure G).



Figure G

9. Connect the braided loop over the sound bar on both sides (Figure H).



Figure H

10. Connect each of the two supplied braided loop and buckles to the sound bar (Figure I).



Figure I

11. Connect the front bungee to the windshield footman loop (Figure J).



Figure J



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 05/15/2018