

## **Bestop Front Seat Covers - Tan**

### **Installation Guide for Jeep Wrangler '07-'16 2-Door JK**

**Installation Time:** 1 Hour

**Tools Required:**

- ✓ Box Cutter/Knife (To Open Packaging)

**Installation Instructions:**

1. Remove all six tan seat cover pieces from the packaging (Figure A).



Figure A

2. Lay each tan seat cover piece out in the sun, flat, to help work wrinkles caused by the packaging out (Figure B).



Figure B

3. Remove the headrest from the driver's side (Figure C).



Figure C

4. Work the tan cover over the driver's side headrest (Figure D).





Figure D

5. Work the tan back cover over the back portion of the driver's side seat (Figure E).



Figure E

6. Tug down the tan cover completely (Figure F).



Figure F

7. Work the tan seat cover over the bottom portion of the driver's side seat (Figure G).



Figure G

8. Slide the fabric straps through the opening between the seat and back.
9. Run the fabric straps under the seat and up the front of the seat (Figure H).





Figure H

10. Secure the straps through each of the provided plastic clips (Figure I).



Figure I

11. Replace the headrest (Figure J).




Figure J

12. Follow Steps 3-11 on the passenger's side seat.





Before

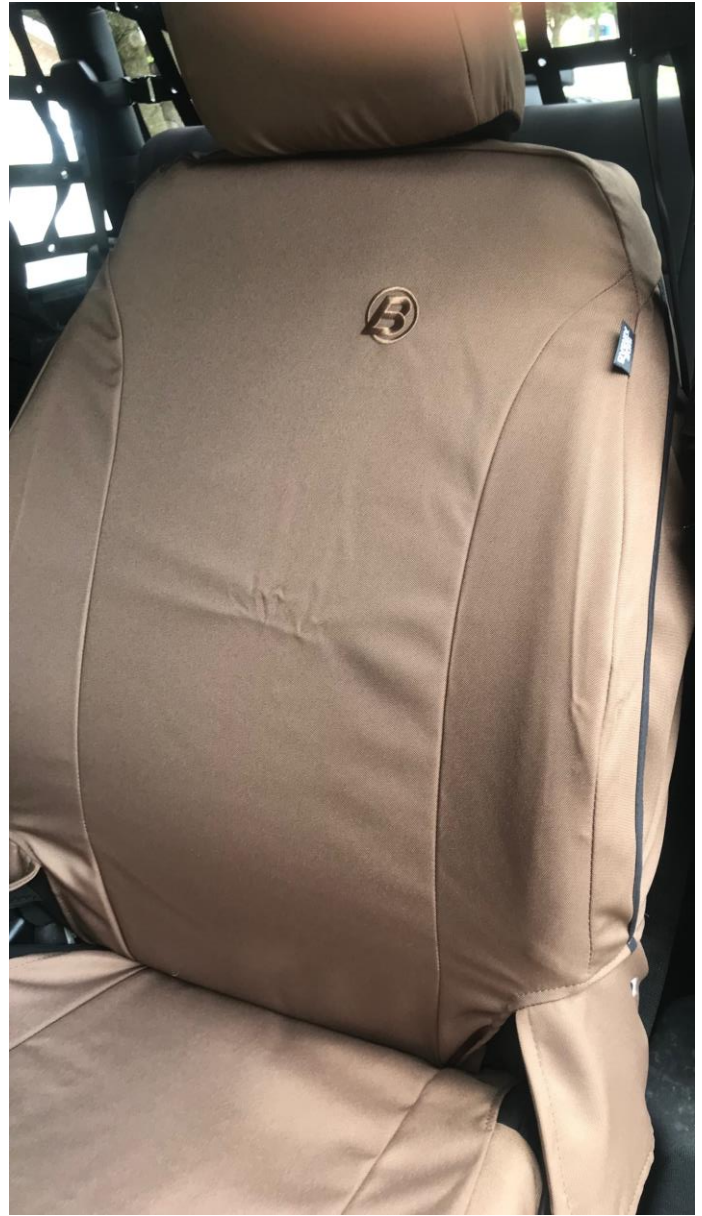

After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 06/20/2018