

Bestop Underseat Storage Lock Box - Passenger Side
Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: 1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ 18mm Socket
- ✓ Socket Wrench
- ✓ Torx 30 Bit
- ✓ Needle Nose Pliers
- ✓ Philips Screwdriver

Installation Instructions:

1. Locate the PEM electrical plug under the passenger seat (Figure A).

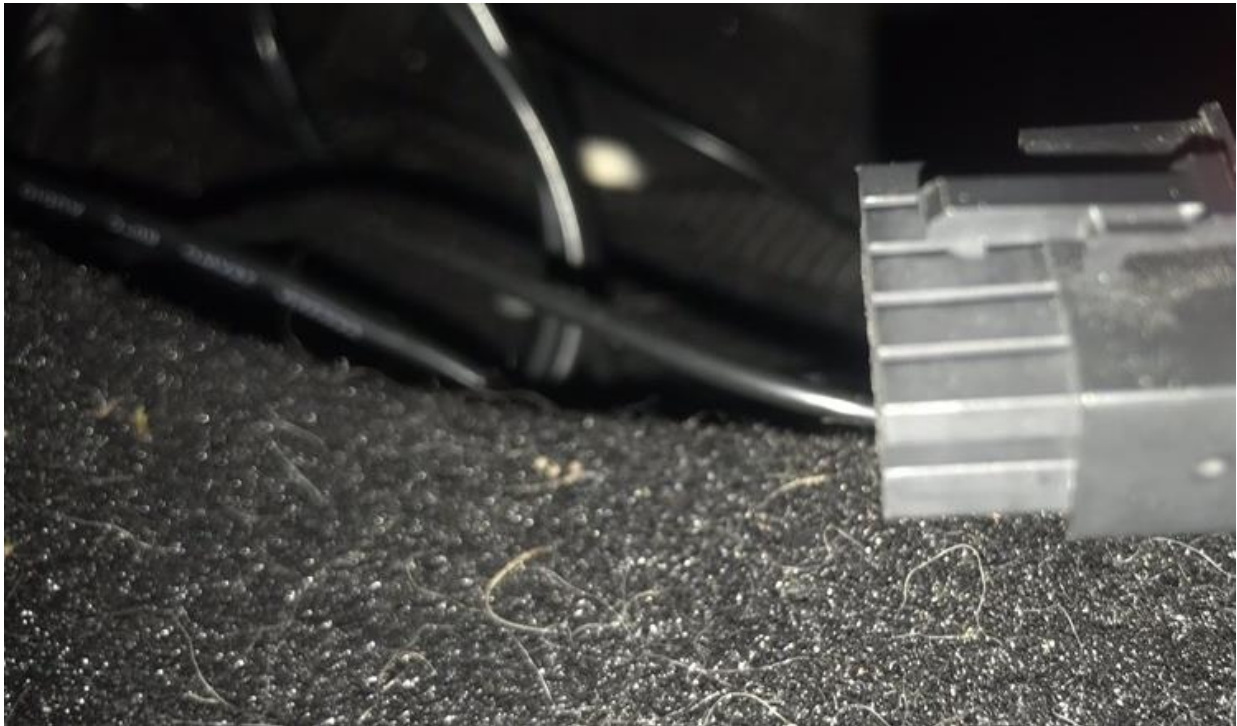


Figure A

2. Using a Torx 30 bit, remove the screws on the side mount (Figure B).



Figure B

3. Zip tie the OEM electrical plug to the side of the seat mount (out of the path of the lock box's future location) (Figure C).



Figure C

4. Mount the brackets to the bottom of the lock box utilizing the provided M5x8mm pan head screws (Figure D).



Figure D

5. Utilizing an 18mm socket wrench, remove the two front seat mount bolts on the passenger seat (Figure E).



Figure E

6. Slide the lock box under the seat mounts and return the two bolts removed in step 5 (Figure F).



Figure F



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 06/22/2019