

KC HiLiTES 4 in. Rally 400 Halogen Lights - Spread Beam - Pair

Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife (For Packaging)
- ✓ Crescent Wrench

Installation Instructions:

1. Open the packaging and locate the wiring harness (Figure A).



Figure A

2. Run the negative (black) wire to the negative (-) battery terminal (Figure B).



Figure B

3. Run the positive (red) wire to the positive (+) battery terminal (Figure C).



Figure C

4. Run the wiring harness to the desired switch mounting location and connect the yellow wire to the top of the switch terminals (Figure D).



Figure D

5. Run the red wire to the middle switch terminal (Figure E).

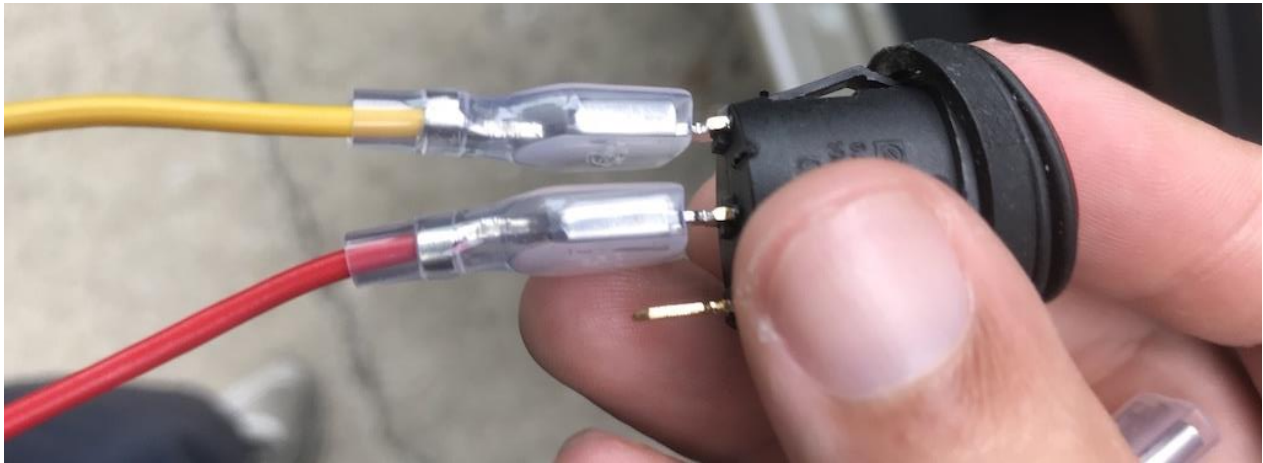


Figure E

6. Run the black wire (ground) to the bottom terminal of the switch (Figure F).

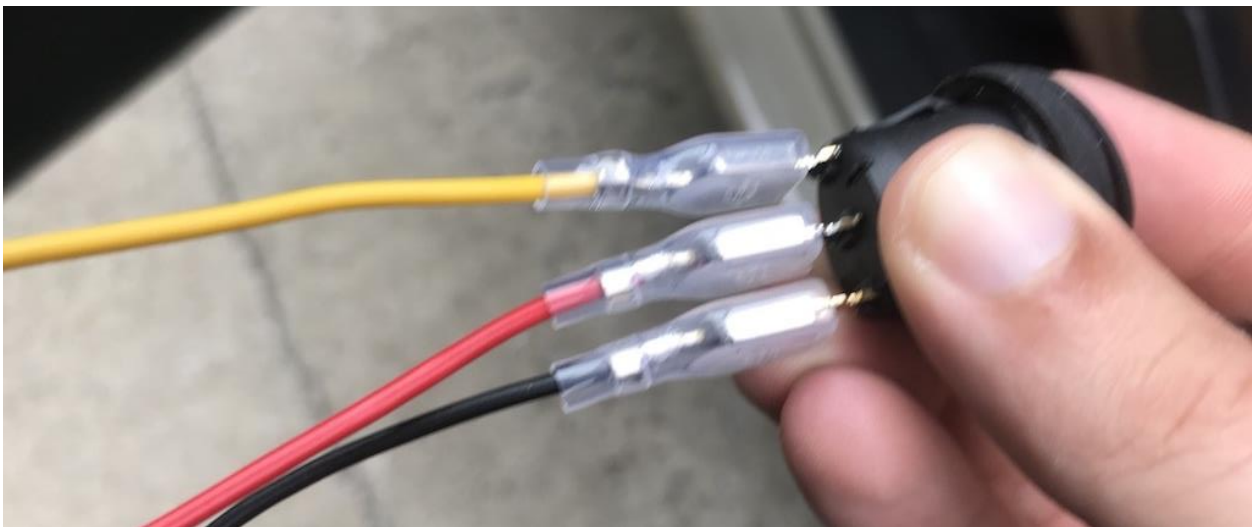


Figure F

7. Mount each light in the desired location using a light mount (not included). First run the bolt through the mount then put the crush ring on (Figure G).



Figure G

8. With the crush ring on, return the nut onto the bolt on each side (Figure H).

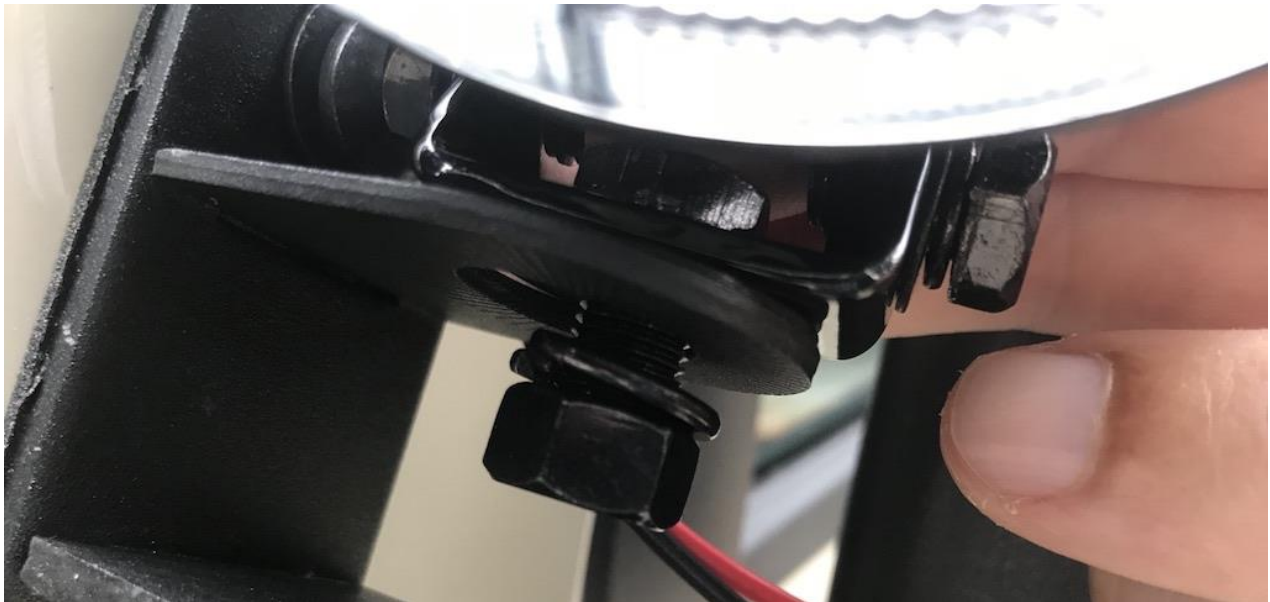


Figure H

9. Tighten the nut completely on each side.
10. Run the wiring harness to the light mounting location, ensuring the wiring harness can reach the light connectors (Figure I).



Figure I

11. Connect the lights to the wiring harness (Figure J).



Figure J



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 07/30/2018