

KC HiLiTES 6 in. Black Daylighter Round Halogen Lights - Spread Beam - Pair

Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: 1 Hour

Tools Required:

- ✓ 10mm Socket Wrench
- ✓ 16mm Socket Wrench

Installation Instructions:

1. Remove the nut on the positive (+) battery terminal (Figure A).



Figure A

2. Run the white wire to the positive (+) terminal battery (Figure B).

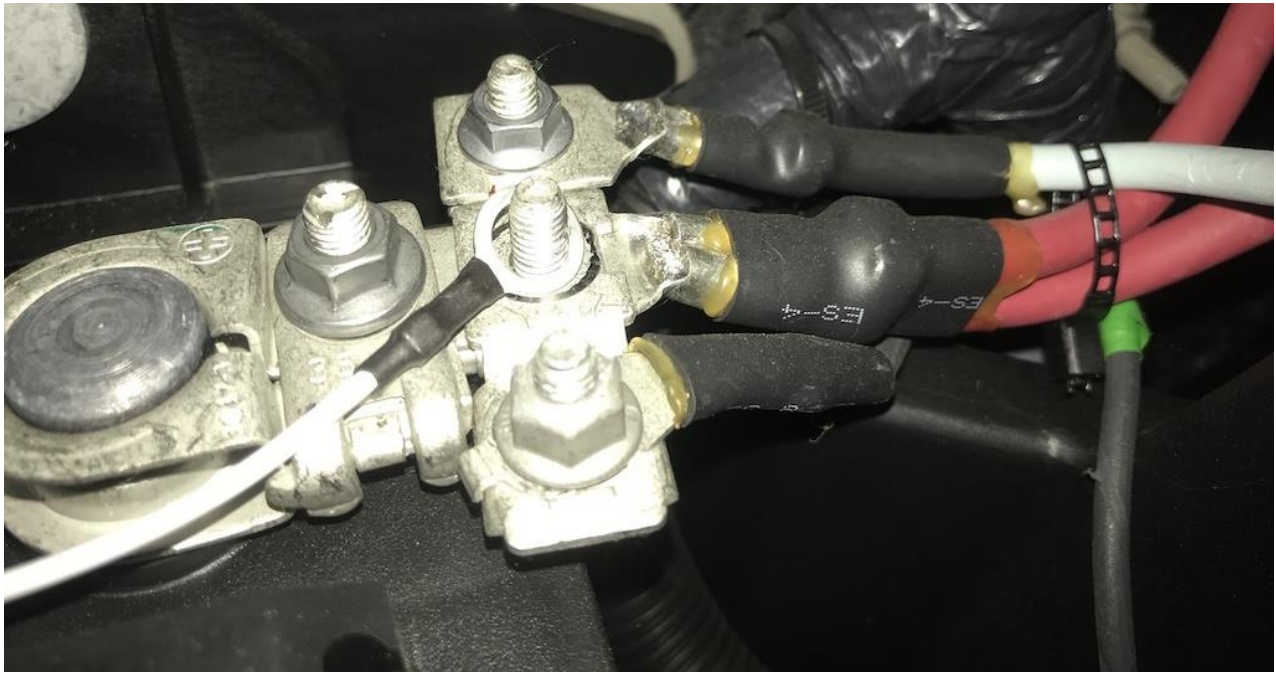


Figure B

3. Run the yellow wire to a 12-volt source or the positive (+) terminal battery (Figure C).



Figure C

4. Return the nut and tighten down on the positive (+) battery terminal (Figure D).



Figure D

5. Remove the nut from the negative (-) battery terminal, run the black wire to the negative (-) terminal then return and tighten down the nut (Figure E).



Figure E

6. Run the black switch wiring to the switch and secure (Figure F).

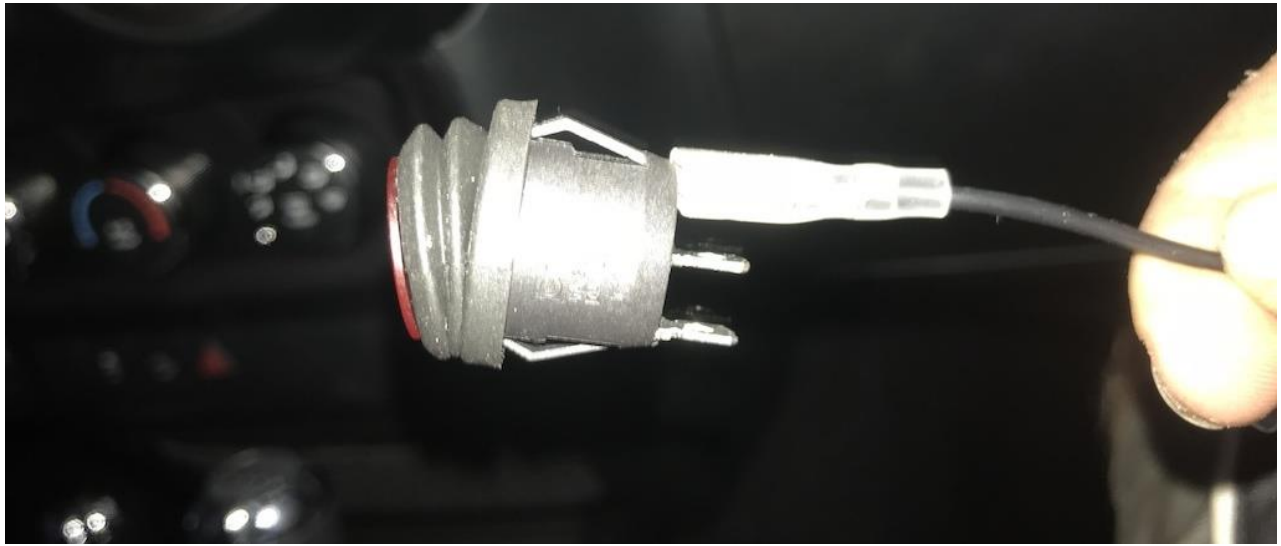


Figure F

7. Run the green switch wiring to the switch and secure (Figure G).

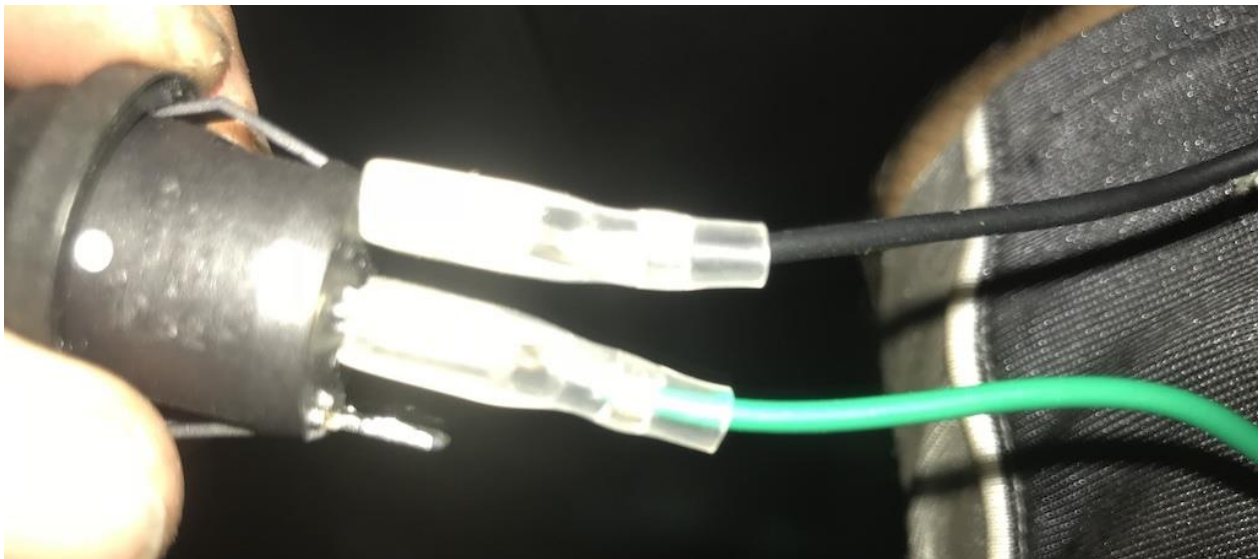


Figure G

8. Run the white switch wiring to the switch and secure (Figure H).



Figure H

9. Secure the light to a light mount using a 16mm socket wrench.
10. Run the light wiring harness to the mounting location (Figure I).

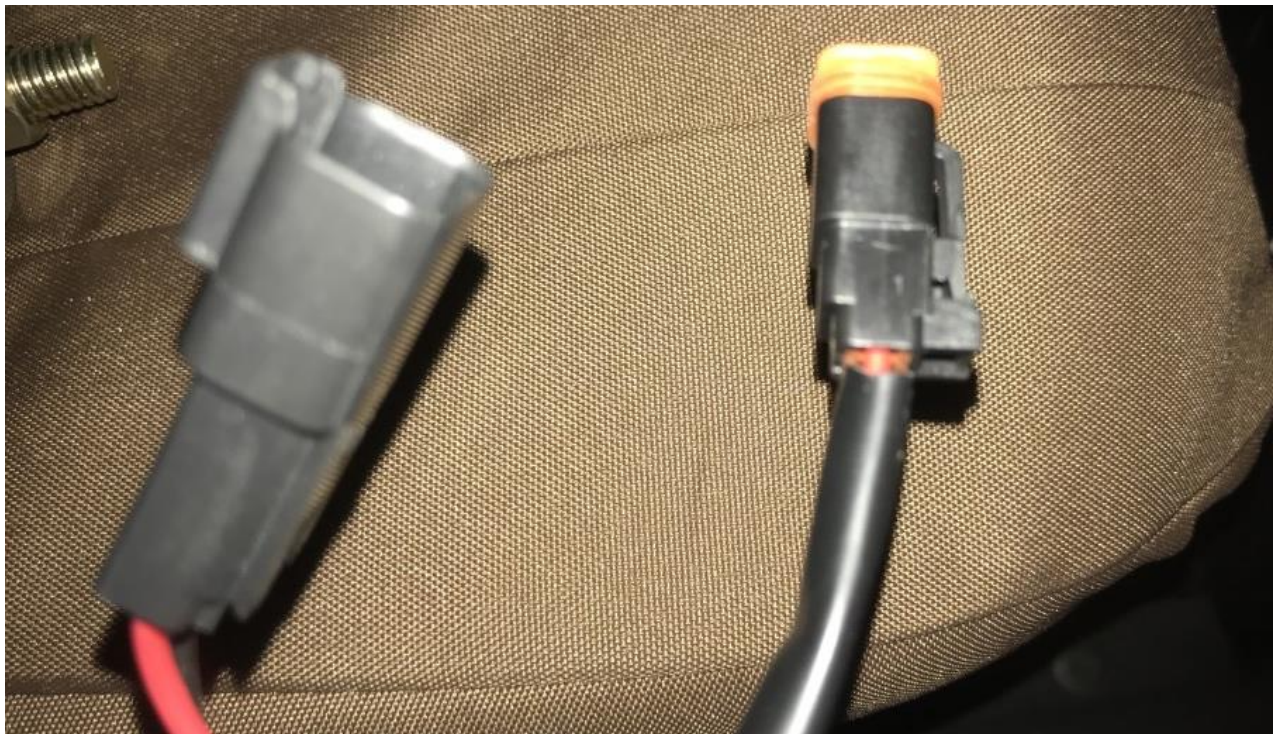


Figure I


11. Connect the light wiring harness to the light connector (Figure J).



Figure J



Before

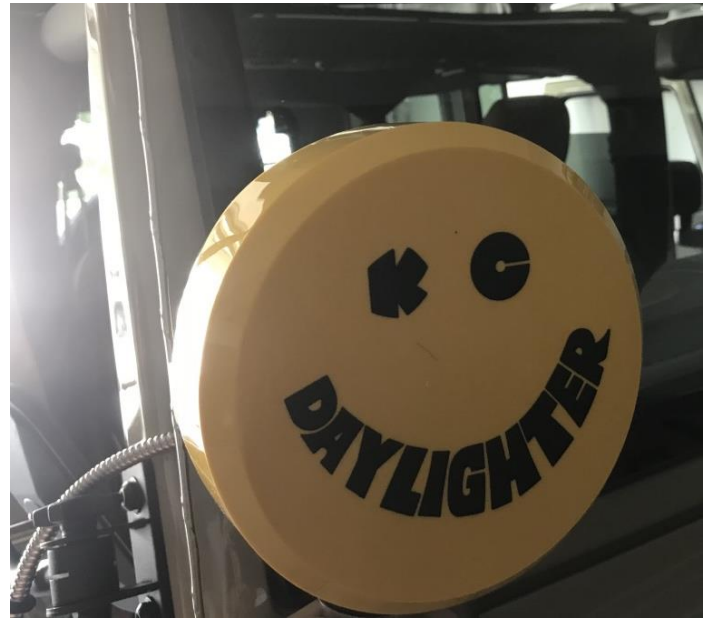

After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 07/08/2018.