

KC HiLITES Flex Single LED Light - 10W Spot Beam - Pair
Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ 17mm Socket
- ✓ Socket Wrench

Installation Instructions:

1. Locate the wiring harness (Figure A).



Figure A

2. Run the black (negative) wire to the negative (-) battery terminal (Figure B).

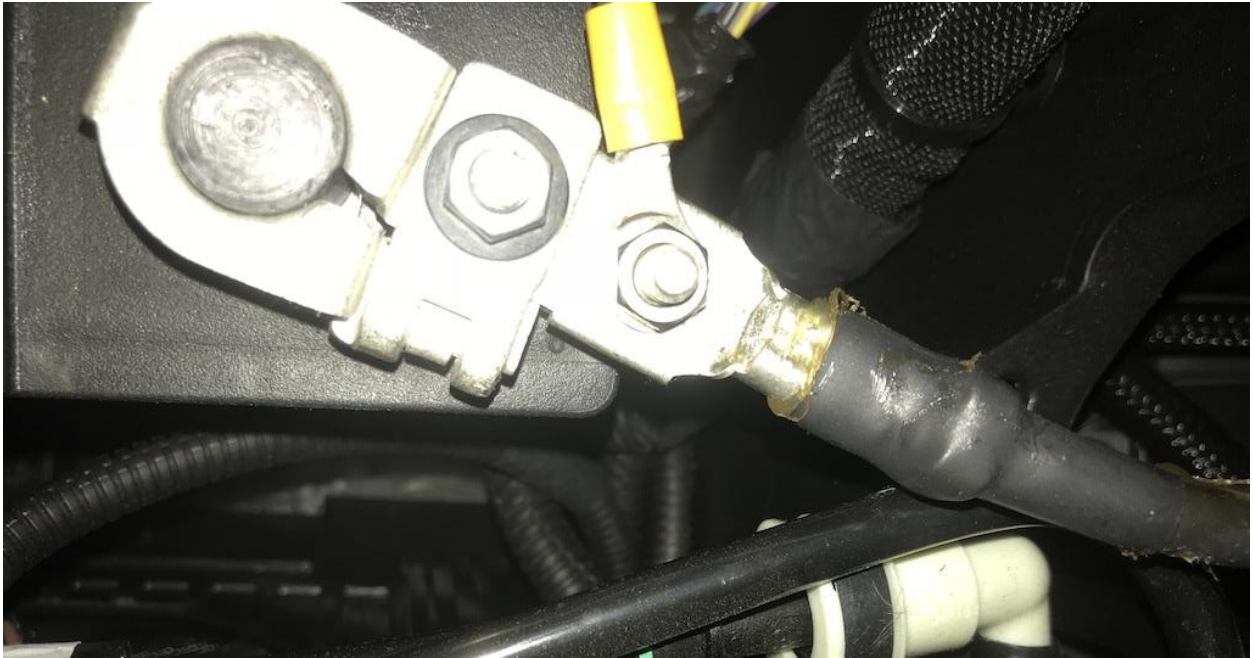


Figure B

3. Run the red (positive) wire to the positive (+) battery terminal (Figure C).



Figure C

4. Run the wiring harness to the mounting location for the switch and run the yellow wire to the top terminal (Figure D).



Figure D

5. Run the red wire from the wiring harness to the middle terminal of the switch (Figure E).

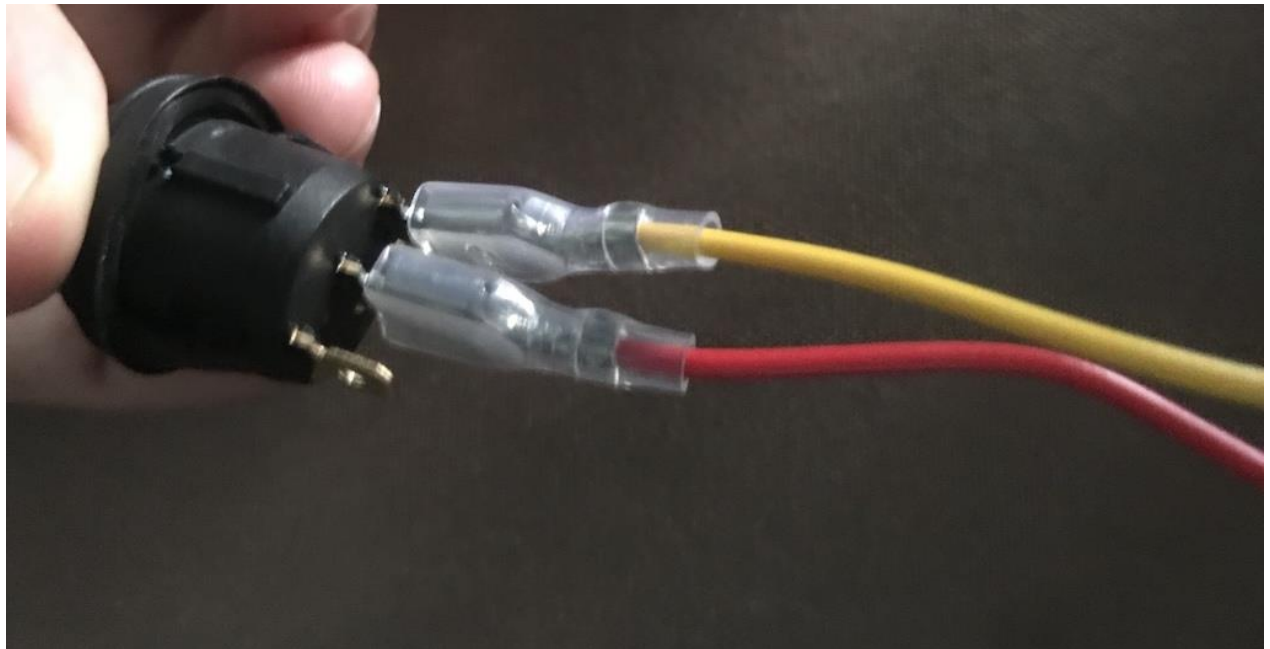


Figure E

6. Run the black wire from the wiring harness to the bottom terminal of the switch (Figure F).

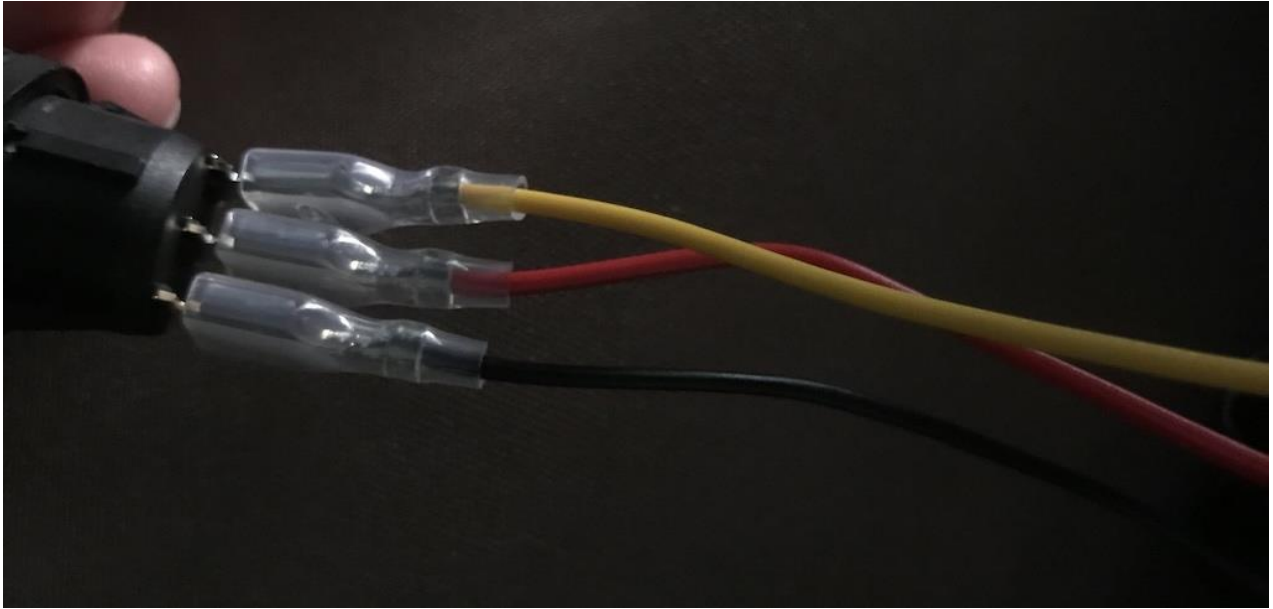


Figure F

7. Using a 17mm socket wrench, remove the nut from the bolt (Figure G).



Figure G

8. Place the bolt through the mounting location and tighten the nut back on (Figure H).



Figure H

9. Run the wiring harness to the LED connectors (Figure I).



Figure I

10. Connect the wiring harness to the LED connectors (Figure J).



Figure J

11. Repeat Steps 7-10 for the other light.



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 08/14/2018