Kurgo Impact Dog Car Harness - Black/Charcoal

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: <1 Hour

Tools Required:

✓ Box Cutter/Knife

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the harness is included and undamaged.



Figure A

2. Locate the nesting buckle on the top rear of the harness (Figure B).

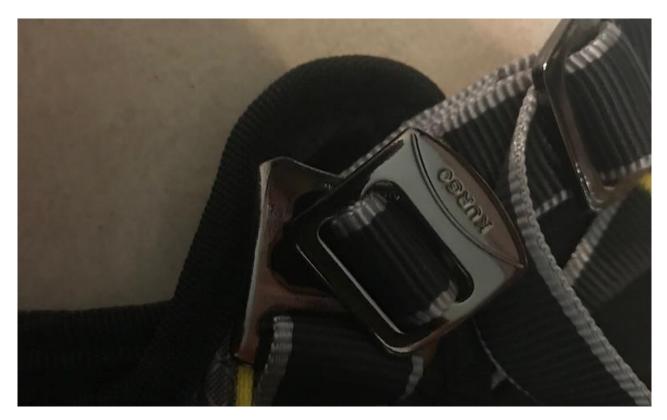


Figure B

3. Release the nesting buckle (Figure C).

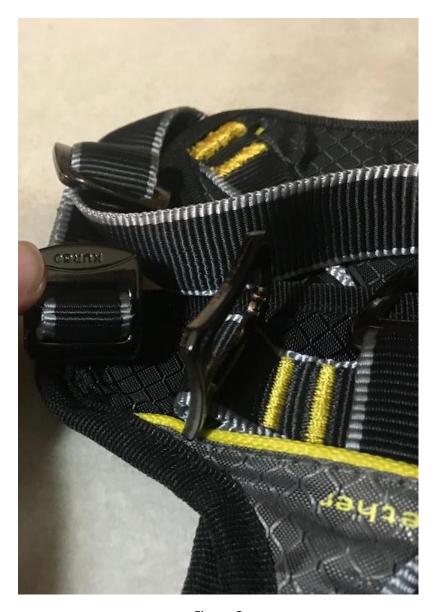


Figure C

4. Unhook the middle stretchable loop from the plastic hook (Figure D). Loosen straps so that the harness can easily fit over the dog's head.



Figure D

5. Slide the harness over the dog's head so that it rests on the dog's back (Figure E).



Figure E

6. Locate the nesting buckles on the backside of the harness again (Figure F).

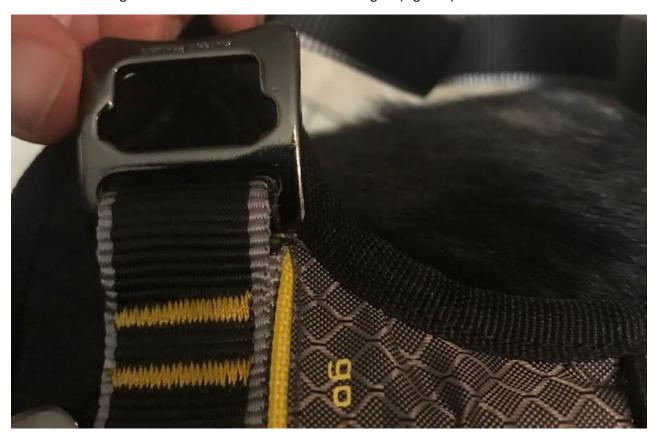



Figure F

- 7. Pull the nesting buckle back through on each side and tighten the straps around the dog, allowing enough room to hook two fingers between the strap and the dog.
- 8. Locate the two overhanging top straps (Figure G).




Figure G

9. Run the seatbelt through both loops and buckle it into the seatbelt clasp (Figure H).

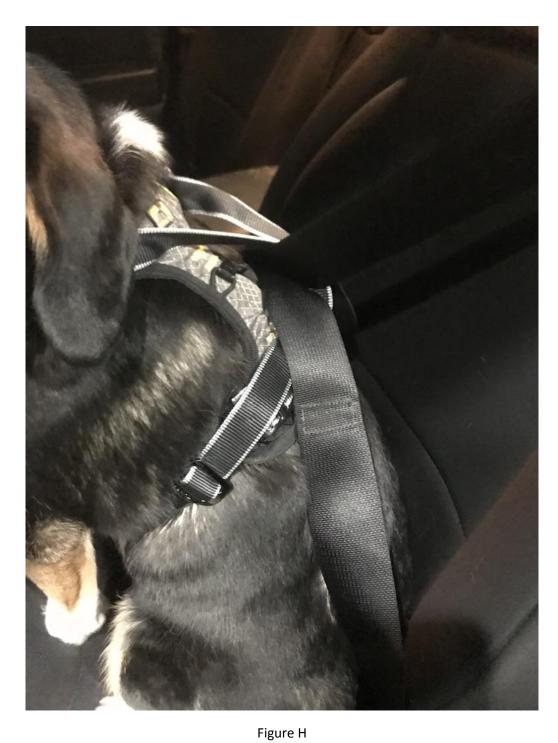



Before

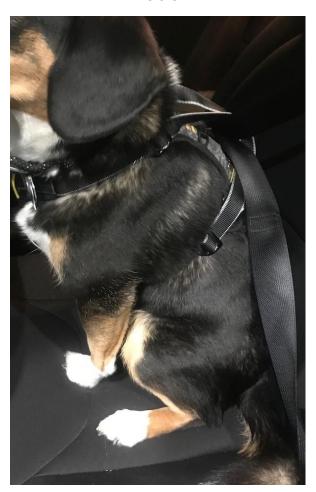

After