

Lange Door Hangers

Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: 1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ Stud Finder
- ✓ Drill
- ✓ ¼" Drill Bit
- ✓ 10mm Socket
- ✓ Socket Wrench
- ✓ Pen/Pencil
- ✓ Philips Head Screwdriver

Installation Instructions:

1. Using a stud finder, locate a stud along the section of wall intended to mount the door hangers from (Figure A).



Figure A

2. Mark first screw location (Figure B).



Figure B

3. Place the door hanger where the first screw location mark is aligned and mark the second screw location.
4. Drill a pilot hole using a $\frac{1}{8}$ " drill bit in both marked locations (Figure C).



Figure C

5. Place the door hanger, aligned with the pilot holes, back on the wall.
6. Using a 10mm socket, start a bolt in both locations (Figure D).



Figure D

7. Tighten both bolts until they are flush with the door hanger (Figure E).



Figure E

8. Locate the next closest stud using a stud finder and mark the two mounting holes level with the door hanger already installed (Figure F).

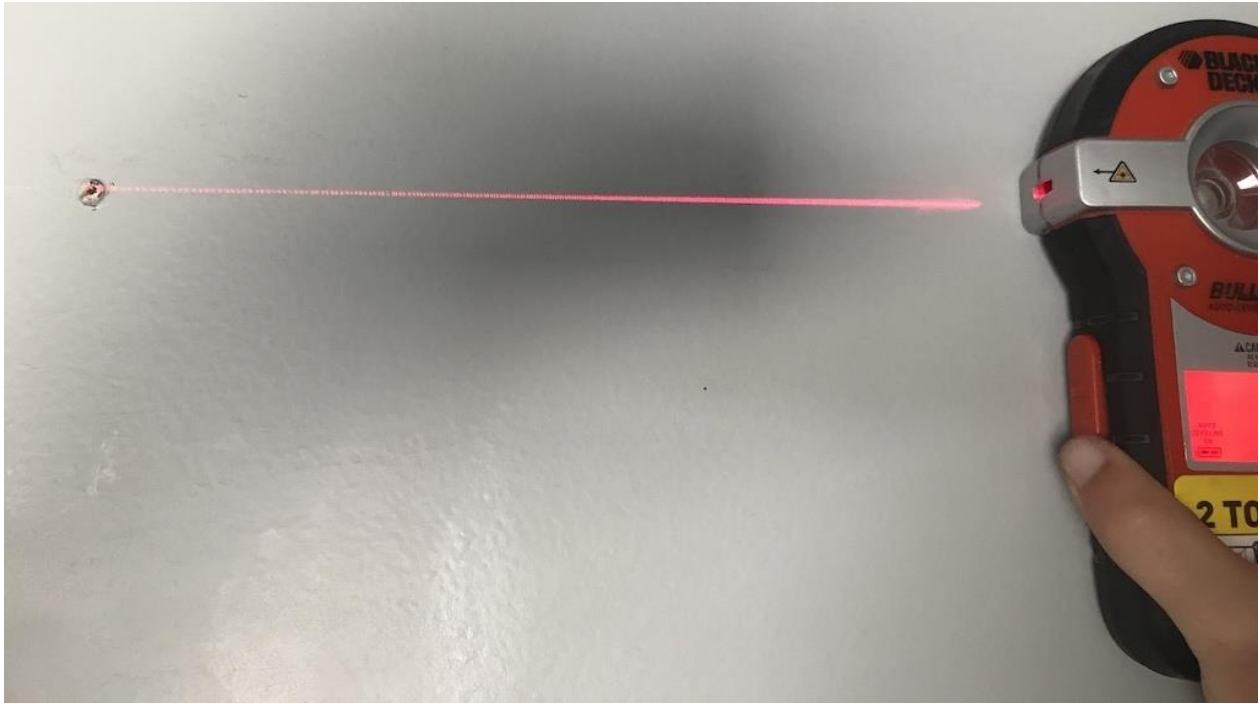


Figure F

9. Repeat Steps 4-7 in mount the second door hanger (Figure G).



Figure G

10. Slide a hanger into each mounted arm and start both screws in the top of each hanger (Figure H).



Figure H

11. Using a mallet, hammer a black plastic end cover into each of the four openings of the two hangers (Figure I).



Figure I



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 07/13/2018