Oracle LED Door Projectors - JEEP Logo

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: 1.5 Hours

Tools Required:

- ✓ Box Cutter/Knife
- ✓ Wire
- ✓ Wire Mounts/Wire Tappers
- ✓ Drill

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the hardware is included and undamaged.



Figure A

2. Locate the screw-on cap on the LED door projector (Figure B).



Figure B

3. Using a Philips head screwdriver, loosen the cap (Figure C).



Figure C

4. Extend the wiring off each LED door projector using different color wires (preferably red for positive (+) and black for negative (-)) (Figure D).



Figure D

5. Open the driver's side door (Figure E).



Figure E

6. Using the supplied hole saw drill bit, locate and drill a hole in the underside of the door (Figure F).



Figure F

7. Push the LED door projector inside the hole and run the wiring through the door compartment (Figure G).




Figure G

8. Tap into a positive (+) wire or directly to the positive (+) battery terminal with the red wire. Tap into a ground wire or mount to chassis with the black wire (Figure H). *Note: If wanting these LEDs to appear when doors are opened, tap into the 12v wiring between the door and the clip.*



Figure H

- 9. Tighten the screw-on cap.
- 10. Repeat Steps 2-9 on the other door.

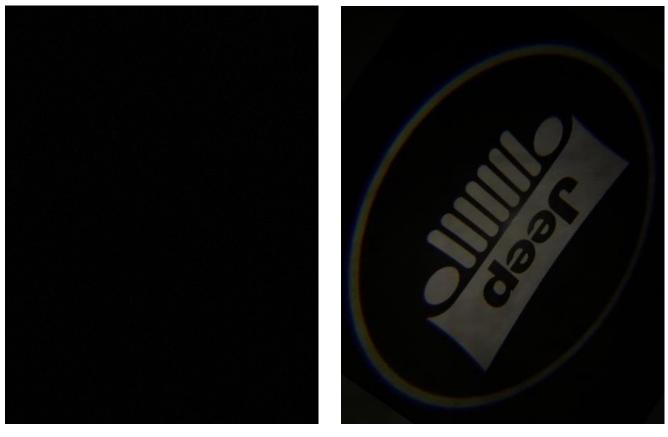

Before

After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 05/23/2018.