

Raxiom 32 in. Super Slim Dual Row LED Light Bar
Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ 10mm Socket
- ✓ Socket Wrench
- ✓ Light Wiring Harness

Installation Instructions:

1. Connect the negative wire of the wiring harness (not supplied) to the negative battery terminal (Figure A).



Figure A

2. Connect the positive wire of the wiring harness (not supplied) to the positive battery terminal (Figure B).



Figure B

3. Thread a split-washer onto each supplied bolt (Figure C).



Figure C

4. Thread the bolt with the split-washer into the light mount (provided) (Figure D).

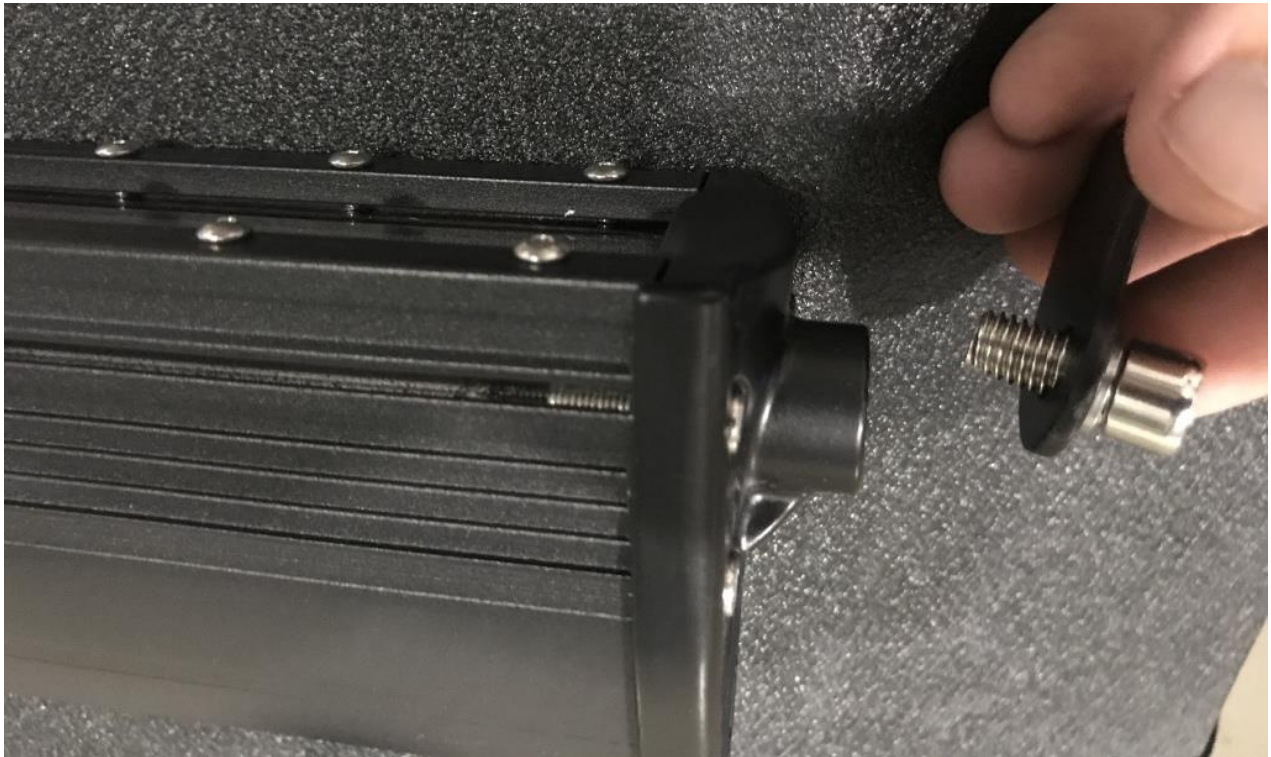


Figure D

5. Repeat Step 4 on the other side (Figure E).



Figure E

6. Tighten using the supplied Allen wrench (Figure F).



Figure F

7. Locate the wires at the end of the LED (Figure G).



Figure G

8. Insert and tighten into a connector (Figure H).



Figure H

9. Connect the LED to the light wiring harness (Figure I).

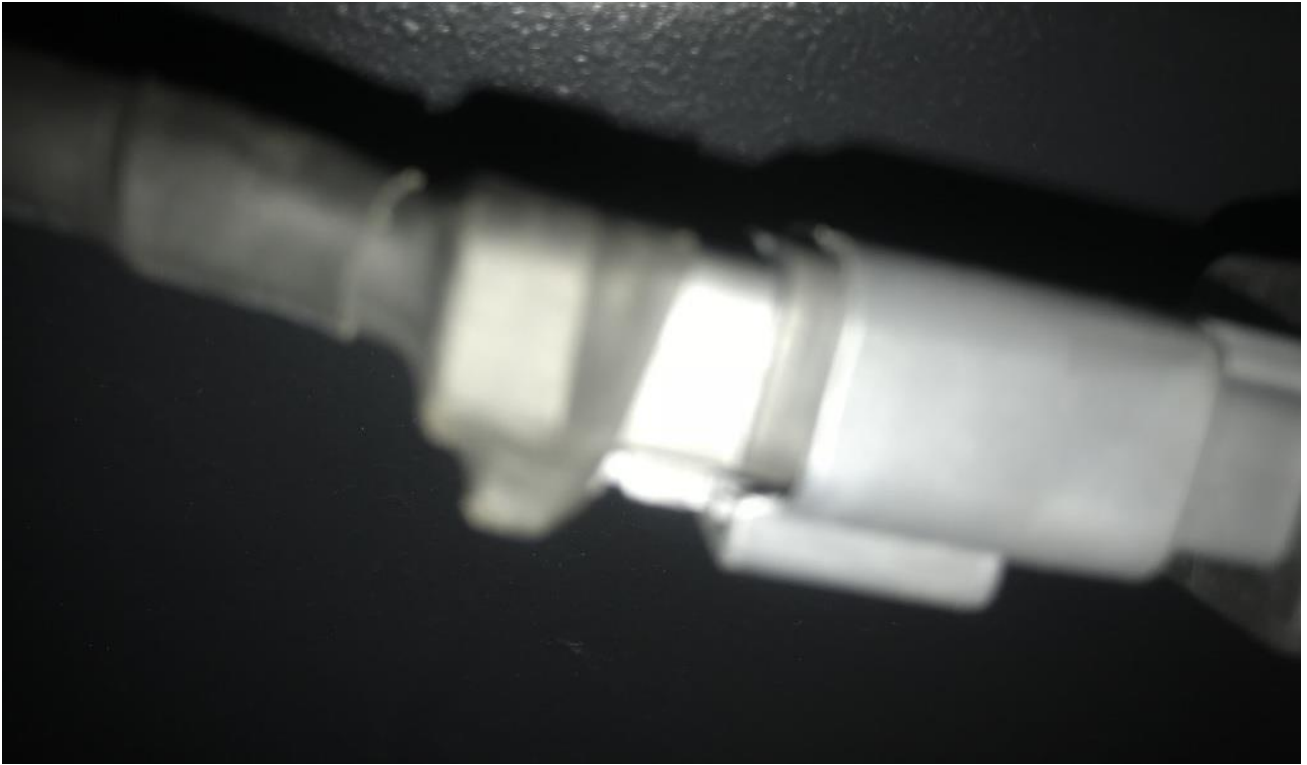


Figure 1



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 08/30/2018