

RedRock 4x4 Tail Light Guards - Black

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ Philips Head Screwdriver

Installation Instructions:

1. Using a Philips head screwdriver, unscrew two screws from the rear tail light (Figure A).

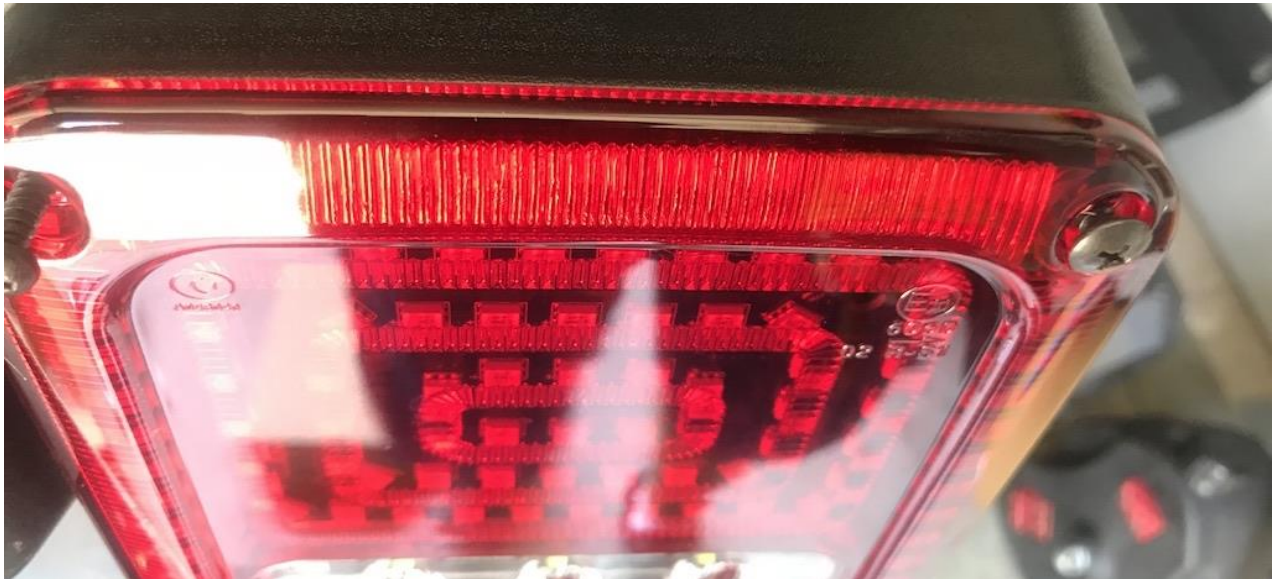


Figure A

2. Holding the tail light in place with one hand, unscrew the other two screws from the rear tail light (Figure B).



Figure B

3. Remove all screws from the tail light (Figure C).



Figure C

4. Keeping the tail light securely in place, align the tail light guard over the tail light so the holes line up (Figure D).



Figure D

5. Thread each of the two screws removed in Step 1 into place to hold the tail light and tail light guard in place (Figure E).

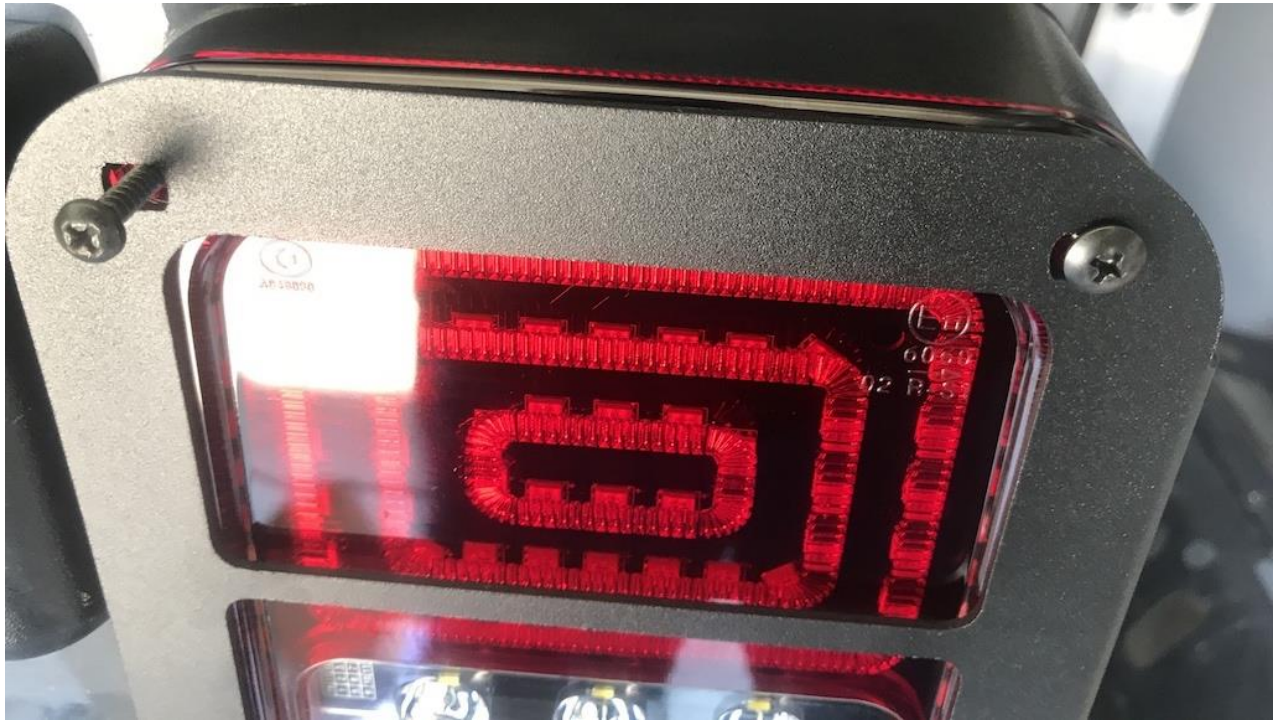


Figure E

6. With the tail light and tail light guard secured, thread the two screws removed in Step 2 into place (Figure F).



Figure F

7. Using a Philips head screwdriver, tighten all four screws until the tail light and tail light guard are securely mounted against the vehicle body (Figure G).



Figure G

8. Repeat Steps 1-7 on the other tail light.



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 07/05/2018