

Rigid Industries E-Mark Dually LED Cube Lights - Spot Beam - Pair

Installation Guide for Jeep Wrangler '07-'18 4-Door JKU

Installation Time: <1 Hour

Tools Required:

- ✓ 10mm Socket
- ✓ Socket Wrench

Installation Instructions:

1. Run the included wiring harness to the engine bay. Connect the black wire to the negative (-) battery terminal using a 10mm socket wrench (Figure A).



Figure A

2. Connect the red wire to the positive (+) terminal (Figure B).

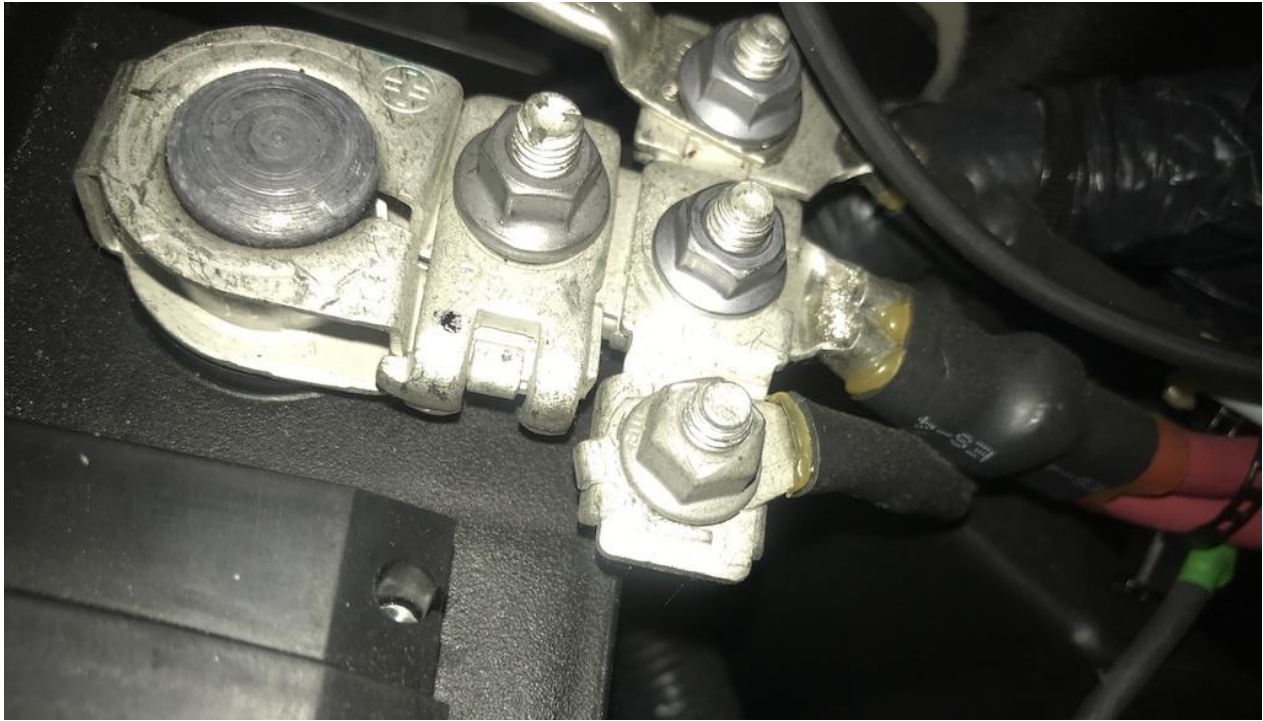


Figure B

3. Run the wiring harness into the vehicle cab and connect the solid red wire to the bottom switch terminal (Figure C).



Figure C

4. Connect the black and red wire to the middle switch terminal (Figure D).



Figure D

5. Connect the final red wire (to the LEDs) to the top switch terminal (Figure E).



Figure E

6. Run the light harness to the LED mounting location (Figure F).



Figure F

7. Connect the LED to the light harness (Figure G).



Figure G

8. Repeat Steps 6 and 7 for the other LED.



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 08/30/2018