

Rugged Ridge Accessory Brake Light LED Ring

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: <1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ Torx 20 Bit

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the LED ring is included and undamaged.



Figure A

2. Remove the bolts from the spare tire (Figure B).



Figure B

3. Remove the spare tire (Figure C).



Figure C

4. Remove the third brake light by unscrewing the four rear third brake light screws using a Torx 20 bit (Figure D).



Figure D

5. Unclip the third brake light harness (Figure E).



Figure E

6. Place the accessory brake light LED ring onto the spare tire bolts (Figure F).

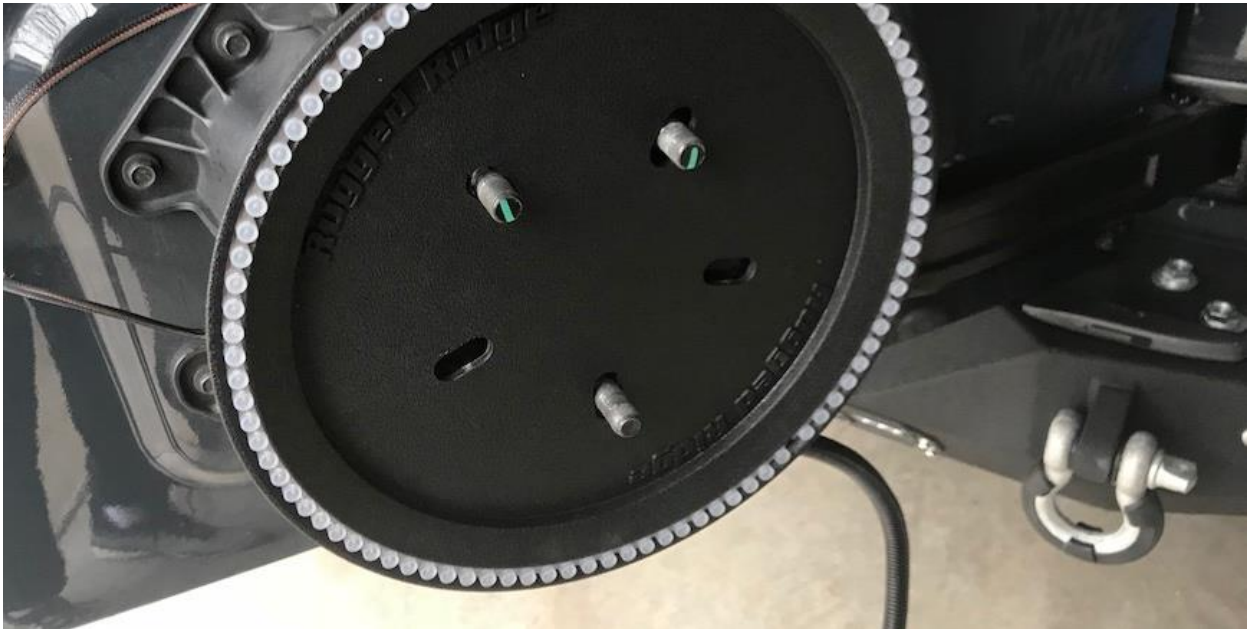


Figure F

7. Connect the brake light factory harness to the LED ring (Figure G).



Figure G

8. Reattach the third brake light using the same four bolts and a Torx 20 bit (Figure H).



Figure H

9. Replace the spare tire (Figure I).



Figure 1



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 02/03/2018