

Smittybilt Water Resistant Cab Cover w/ Door Flaps (07-17 Wrangler JK 4 Door) Installation Guide

Installation Time: 10 Minutes

Tools Required:

- ✓ None

Installation Instructions:


1. Unroll the cover.




2. Lay the cab cover upside down making sure that it is oriented correctly.



3. Lay the cab cover over the Jeep and align the corners of the cab cover to the corners of the windshield.

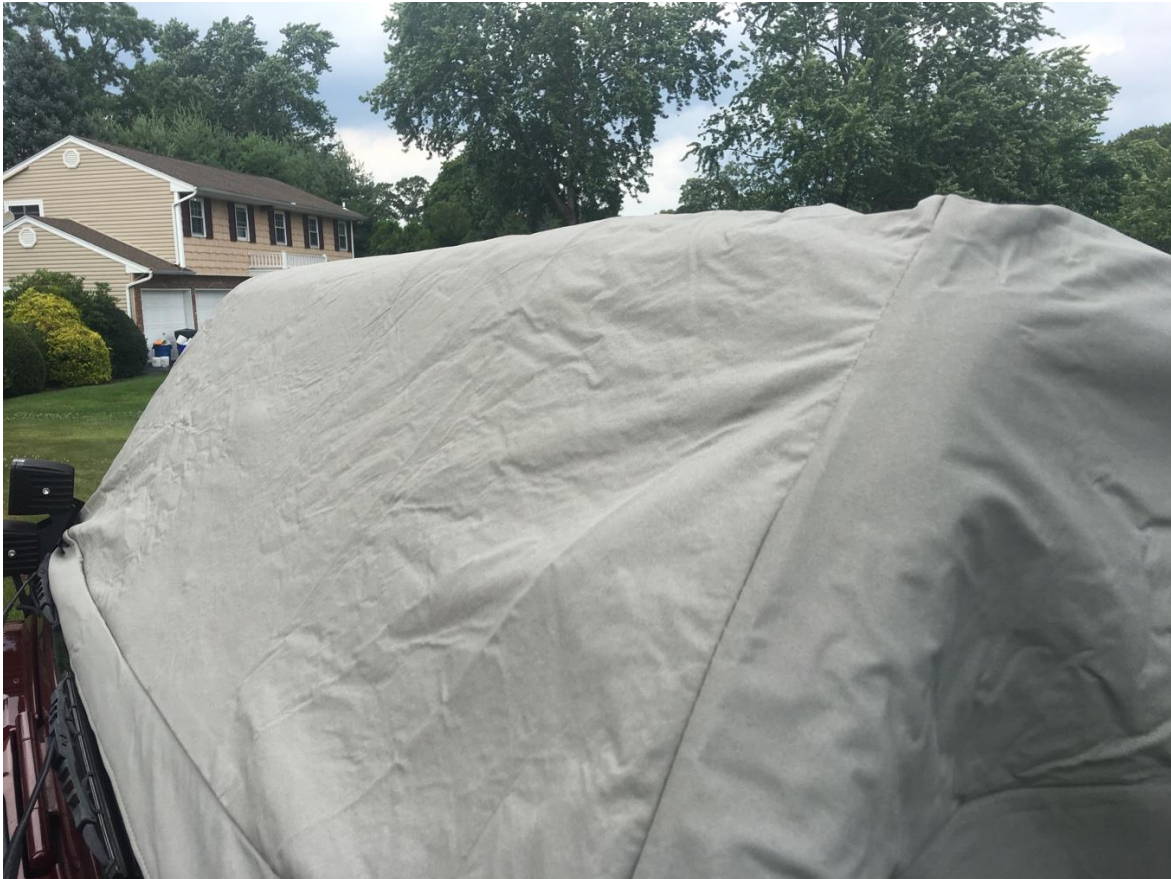

4. Slip the plastic piece of the cab cover underneath the body of the Jeep near the rear.

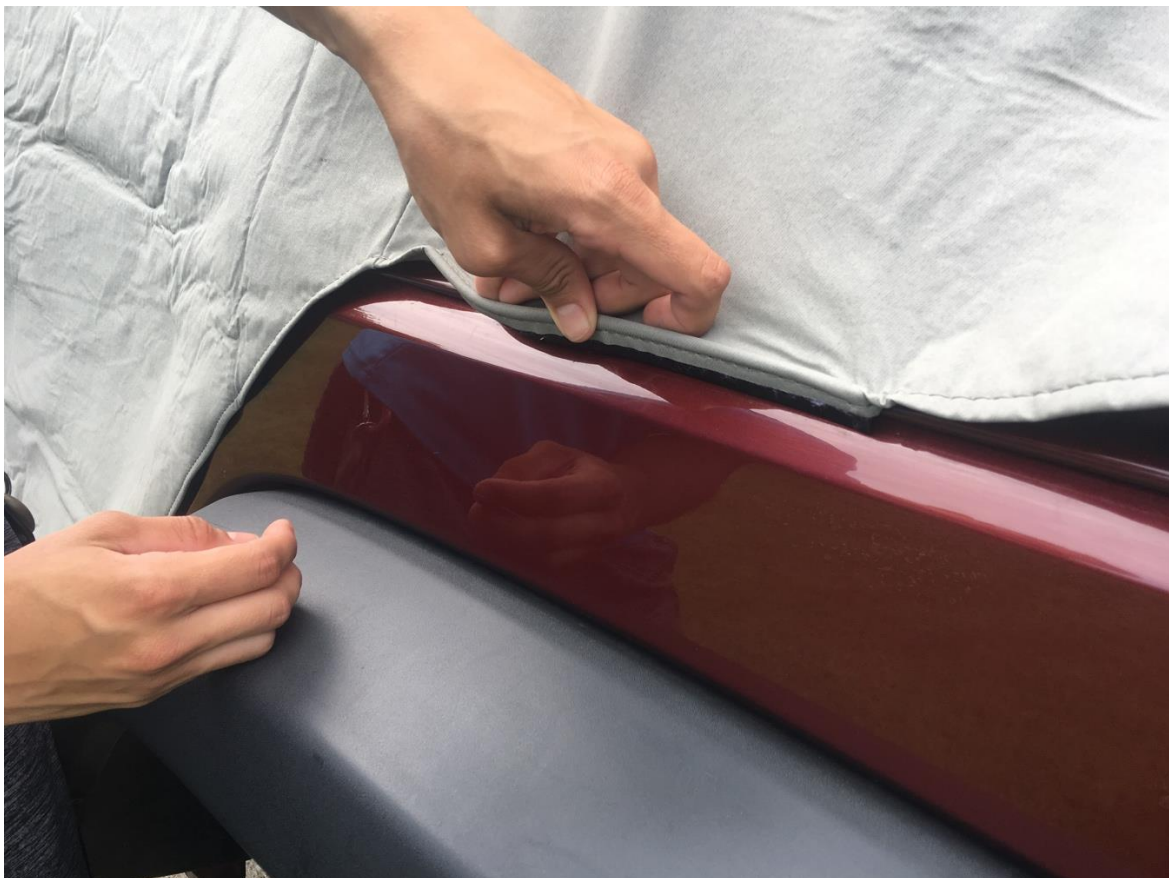

- Slip the next plastic piece under the body.



- Slip the final two plastic pieces under the body near the tail light.



- Repeat steps 4-6 for the opposite side.

8. Take the straps near the tailgate and place the hook underneath the tailgate and secure it by pulling the strap.



9. Repeat step 8 for opposite side.

10. Take the three side straps and secure them underneath the body of the Jeep.



11. Repeat step 10 for the opposite side.



12. Finished.

