

Installation Guide

Snyper Triple Tube Rock Rails - Textured Black (07-18 Wrangler JK 4 Door)

Installation Time: 1hr and 30 Minutes

Tools Required:

- ✓ 1/2" drive socket
- ✓ 6 "- 1/2" drive extention



- ✓ 16mm socket
- ✓ 1/2" drive torque wrench
- ✓ optional: 2- 12" high +/- plastic milk crates if doing the job alone.

Installation Notes, Pre-Installation notes (only when needed)

Instruction come stating fitment 07-16 JK wrangler. It does fit 2017 as well. Instructions also state use a 15mm socket. That might be so, but on the 2017 JK its a 16mm socket.


Before Look: See photos 1-2



Installation Instructions:

1. Remove the 6 nuts on each side of the three connection points. See photos 3-4.

- Place the triple rock rails on padded milk crates (Use towels) and align with the three mounting areas. See photos 5-6.

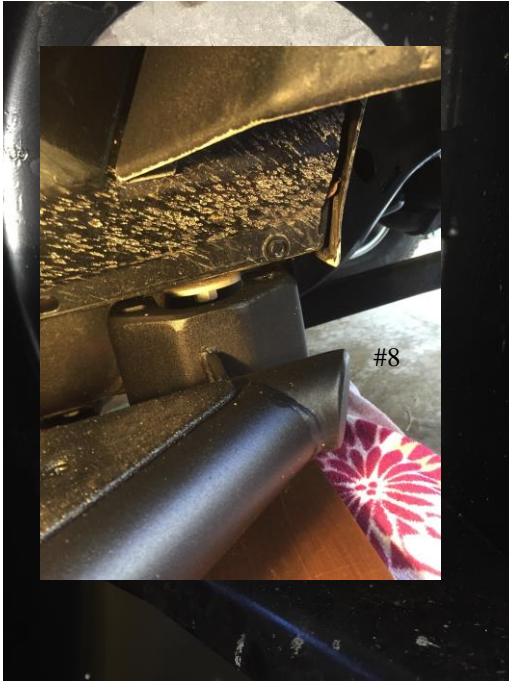

- Place a piece of pine stock on top of milk crates (thickness of stock depends on floor to align height to help align and rock rails in proper position for attachment. See photo 7.



- Slide rail in evenly from front to back. Lift up as needed to secure 16mm nut and washer. Leave loose until all 6 nuts have been started then tighten and torque to 35 ft./lbs. See photo 8.



5. Tools needed see photo #9.

6. Finished look. see photos 10-12.



Installation Instructions Written by ExtremeTerrain Customer Jeff J. 12/29/201