

ZRoadz 3 in. LED Light Cubes w/ Rear Tail Light Mounting Brackets

Installation Guide for Jeep Wrangler '07-'16 2-Door JK

Installation Time: 1 Hour

Tools Required:

- ✓ Box Cutter/Knife
- ✓ 10mm Socket
- ✓ 13mm Socket
- ✓ Socket Wrench
- ✓ Allen Wrench
- ✓ Philips Head Screwdriver

Installation Instructions:

1. Carefully open the package using a box cutter or knife (Figure A) and ensure the hardware and lights are included and undamaged.



Figure A

2. Disconnect the negative (-) battery terminal using a 10mm socket wrench.
3. Mount the LED light pods onto the mounting brackets using the M8 x 20 Hex Head Cap Bolts, M8 Split Lock Washers, and M8 Stainless Steel Nuts and an Allen wrench(Figures B & C).



Figure B



Figure C

4. Tighten using a 13mm socket wrench (Figure D).



Figure D

5. Remove the screws on the tail light lens using a Philips head screwdriver (Figure E).



Figure E

6. Place the mounting bracket (side-specific) onto the tail light, aligning the bracket holes with the lens holes (Figure F).



Figure F

7. Secure the bracket in place by returning the screws removed in Step 5 on each tail light (Figure G).



Figure G

8. Repeat Steps 5-7 on the other tail light.
9. Ground the black (ground) wire of the included wiring harness against the chassis of the vehicle (Figure H).

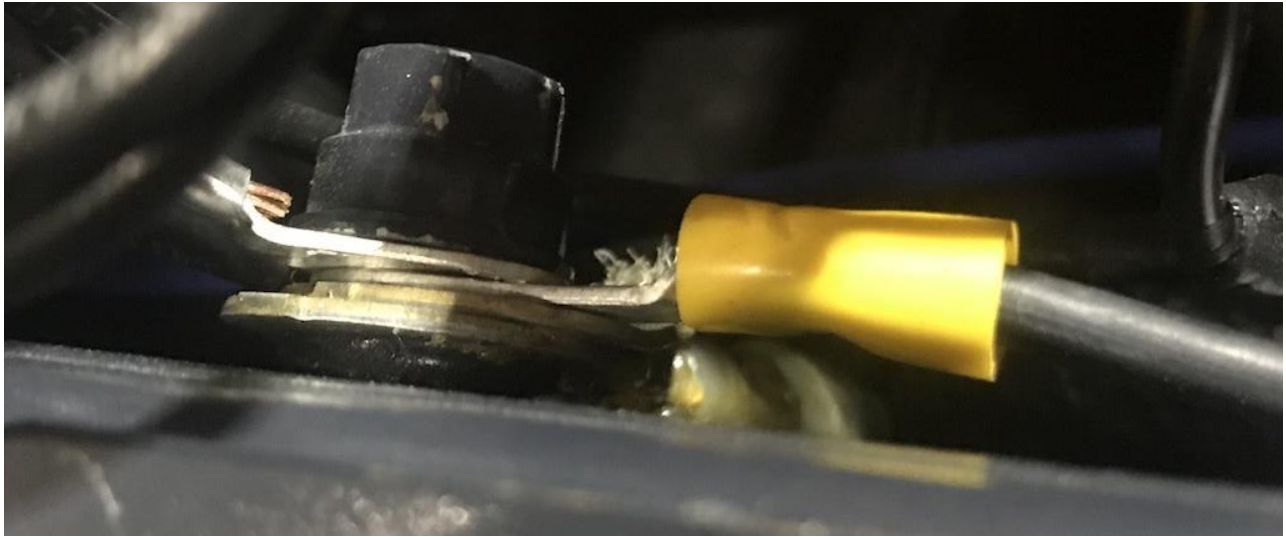


Figure H

10. Connect the red (power) wire to a 12v source or the positive (+) battery terminal (Figure I).



Figure I

11. Connect each LED to the wiring harness ends (Figure J).



Figure J

12. Reconnect the negative (-) battery terminal.



Before



After

Installation Instructions Written by ExtremeTerrain Customer J. Sandlin 02/26/2018