

REDROCK^{4X4}

2007-2014 Wrangler Rock Crawler

Front Grille Guard

Contents:


- (1) - Bumper
- (4) - Bolts
- (8) - Bolts
- (8) - Lock Nuts
- (16) - Washers

Tools Needed:

- 18mm wrench
- socket extension
- 19mm socket
- socket wrench



It is recommended that you have an additional person available to help during this installation, parts can be awkward to hold and support by yourself. Block wheels and set parking brake before beginning work.

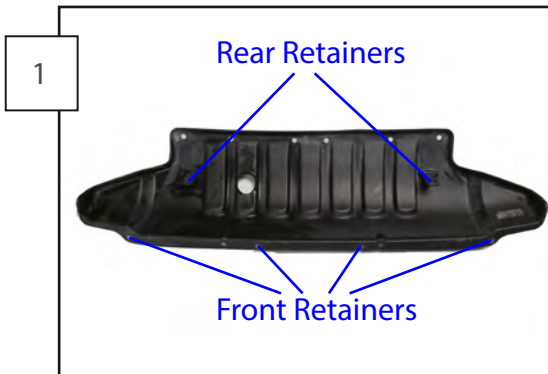

Remove the 4 front and 2 rear, plastic push pin, splash shield retainers. Remove splash shield from the vehicle.



Remove the 4 nuts on the backside of the bumper that attach the front bumper to the frame.



Place the new bumper over the front of the vehicle frame and insert the 4 inner bolts into the holes from the front. Attach a lock nut to the back and tighten them.



Insert the 4 outer bolts into the holes from the front. Attach a lock nut to the back and tighten them. Secure any fog light wiring out of sight and away from moving parts.