

2007-2009 Wrangler Bull Bar

Contents:


- (1) - Bull Bar
- (2) - Mounting Brackets
- (2) - Support Brackets
- (2) - Large Bolt Plates
- (2) - Small Bolt Plates
- (2) - Small Bolts
- (2) - Large Bolts
- (2) - Small Nuts
- (6) - Large Nuts
- (2) - T Bolt Plates
- (2) - Small Lock Washers
- (6) - Medium Lock Washers
- (2) - Large Lock Washers
- (2) - Small Washers
- (8) - Medium Washers
- (2) - Large Washers

Tools Needed:

- 16mm wrench
- 16mm socket
- 18mm socket
- 19mm socket
- Socket wrench



It is recommended that you have an additional person available to help during this installation, parts can be awkward to hold and support by yourself. Block wheels and set parking brake before beginning work. Lock washers and washers should be used with each bolt.

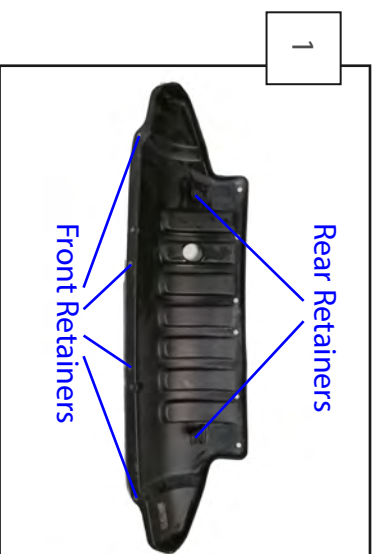

Remove the 4 front and 2 rear, plastic push pin, splash shield retainers.



Insert the large bolt plate through the second hole in the vertical crash bar support. Insert the small bolt plate through the back of the horizontal crash bar and the bull bar bracket. Install the T Bolt through the bottom of the crash bar, through the bull bar bracket. Secure the small bolt plate and t bolt plate with washers lock washers and nuts.



Mount the support bracket onto the Large Bolt Plate that you inserted through the vertical crash bar support and secure it with a nut and lock washer.



Move the bull bar into position and insert the two 19mm rear bolts



Insert the smallest bolt through the support bracket and bull bar top mount, then attach it with the supplied lock nut. Hold the bull bar in position and tighten down all hardware.

The splash shield can be trimmed around the bull bar and reinstalled on the vehicle.

PRODUCT SKU: J100510, J100511, J100161