

RedRock 4x4 Wrap Around Tail light Guards Instructions

Installation Time: 10-15 Minutes

Tools Required:

- ✓ Phillips Head Screw Driver
- ✓ Supplied Philips Head Screws, washers and spacers
- ✓ Painters Tape (Optional)



Installation Instructions:

1. Tape the light to the body of the Jeep. This will prevent the light from dropping once the screws are removed.
Remove the four phillips head screws (Pic 1)




(Pic 1)

2. Used the supplied shorter screws on the inside (closer to the tailgate). Insert the screw through the supplied flat washer, the light guard and the spacer. Use the supplied longer Phillips screws for the outer mounting points and following the same procedure as the inner mounting point. (Pic 2)



Pic 2

3. Then insert through the tail light lens. Use the Philips head screw driver to slowly tighten all four screws. You might have to wiggle the light assembly a little to get the screws to line up. (Pic 3)

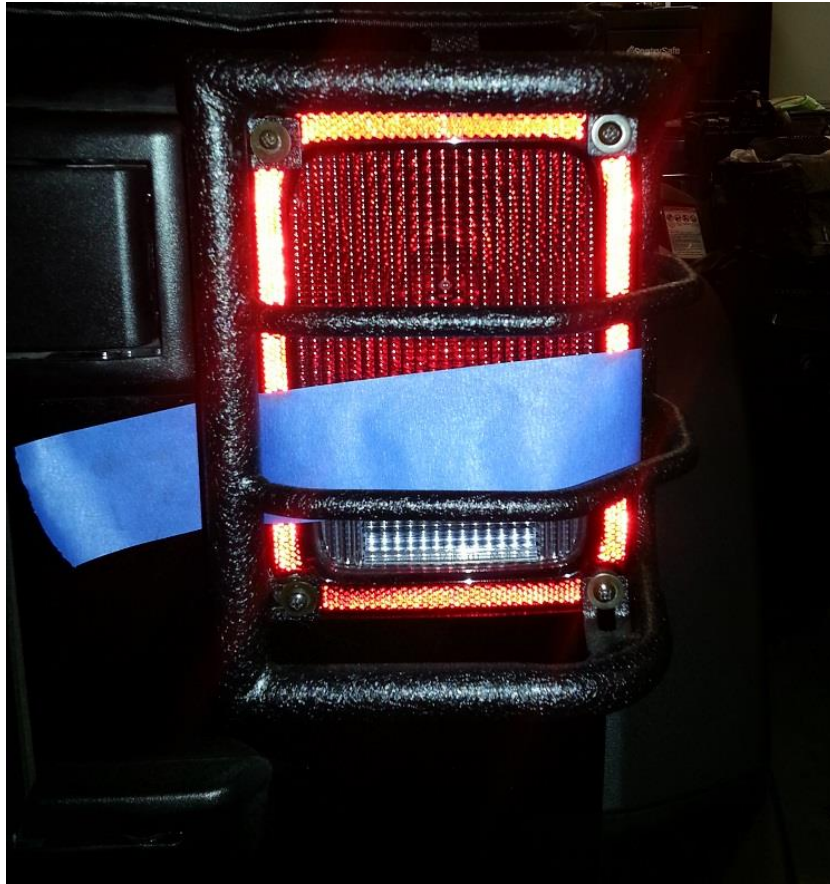


(Pic 3)

4. Be sure all of the screws are tight and the tail light is secure. (Pic 4 & Pic 5)



Pic 4

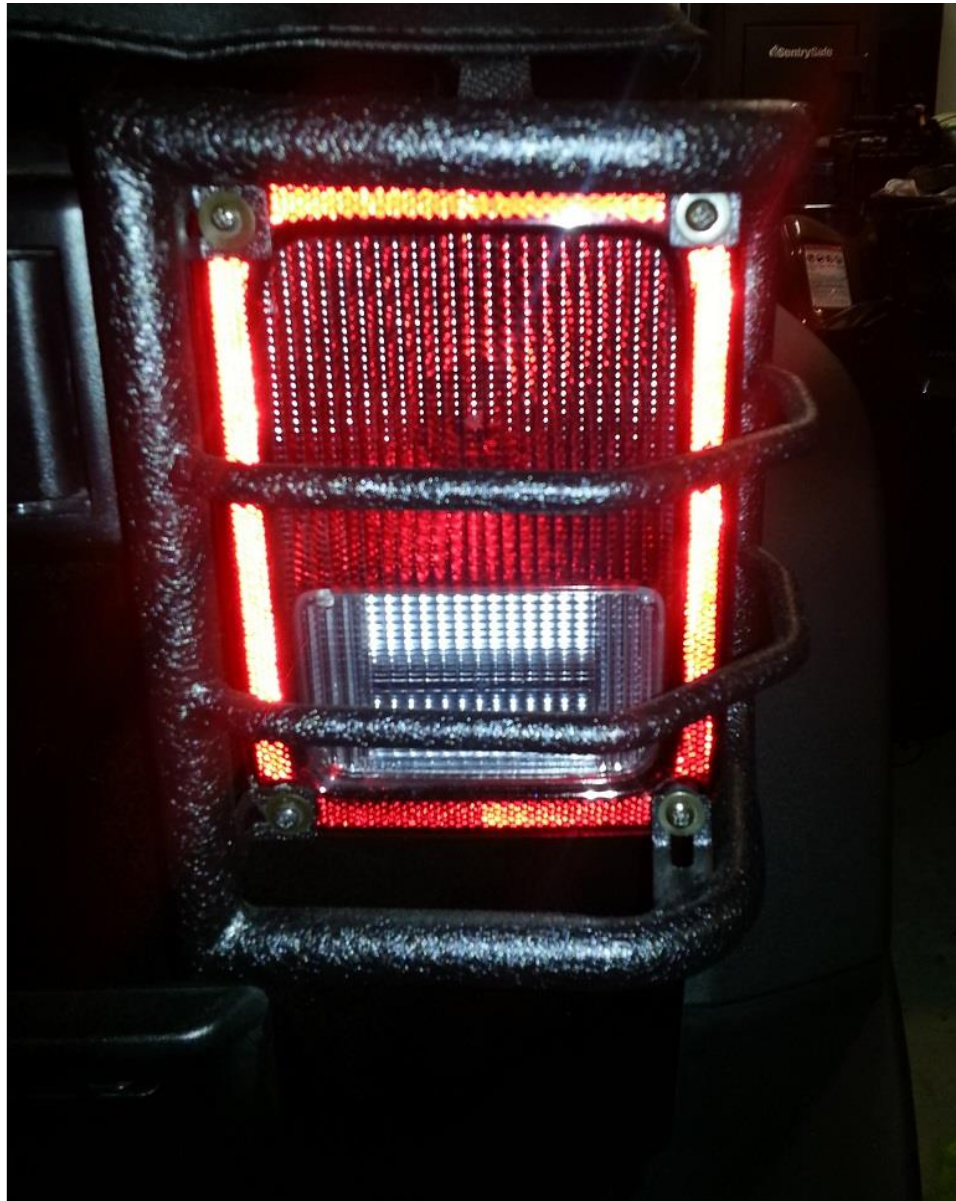

PIC 5

Installation Instructions Written by ExtremeTerrain Customer Clint Powers 04/14/2015