

## **Barricade Headlight Guard - Textured Black (07-15 Wrangler JK)**

**Installation Time:** 30 Minutes or less

### **Tools Required:**

- ✓ Phillips Head Screw Driver
- ✓ Flat Head Screw Driver
- ✓ T15 Torx Bit

### **Installation Instructions:**

1. Remove the retaining nuts on the top of the grille, there are eight total, use the flat head screw driver to pry the center up. Then pull the whole retaining clip out. (PIC 1) Then gently pull the bottom of the grille loose to dislodge the retaining clips. (PIC 2) Disconnect the turn signals by turn the wiring harness towards the ground. Remove the grille and set aside.



**Pic 1**



Pic 2

2. Use the T15 Torx Bit to remove the four screws securing the light. (PIC 3)



PIC 3




3. Position the light guard over the headlight. Be sure to match the brackets on the guard to the mounting holes on the headlight. (PIC 4)



**PIC 4**

4. Align the screw through the guard and the light ring. Then tighten all of the screws. (PIC 5)

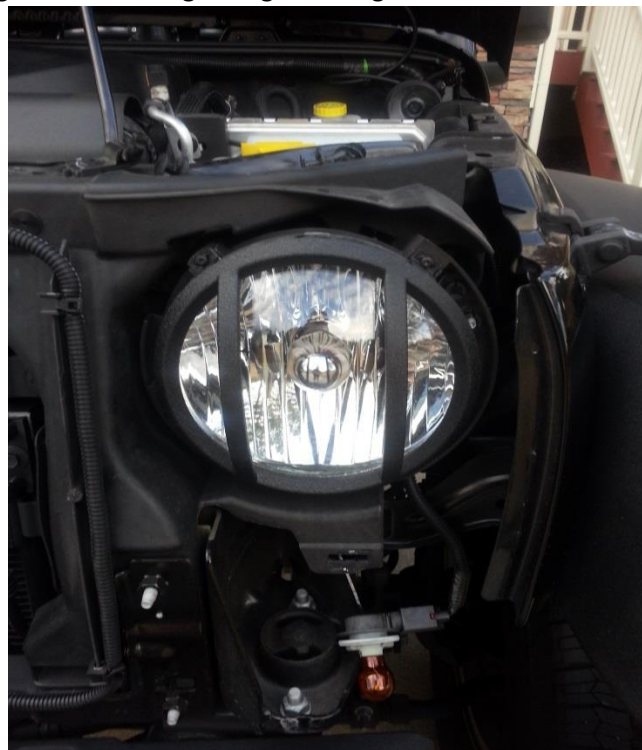

**PIC 5**

5. Install the Grille back onto the jeep. Reattach the turn signals. Align all of the lower retaining clips and snap them into place. Reinsert all of the upper retaining rivets. Should look like the picture below when finished. (PIC 6)



PIC 6

**Installation Instructions Written by ExtremeTerrain Customer Clint Powers 3/30/2015**