

Barricade Tail Light Guard - Textured Black (07-15 Wrangler JK) Customer Installation Guide

Installation Time: 60 Minutes

Tools Required:

- ✓ Phillips Screw Driver




Inside the Box:

- ✓ Tail Light Guards
- ✓ Rubber Screw Buffers



Installation Instructions:

1. Remove the two inner screws and then the two outer screws but keep them separate. Make sure to secure the plastic trim behind the light while removing screws. Each side's screws are different lengths.

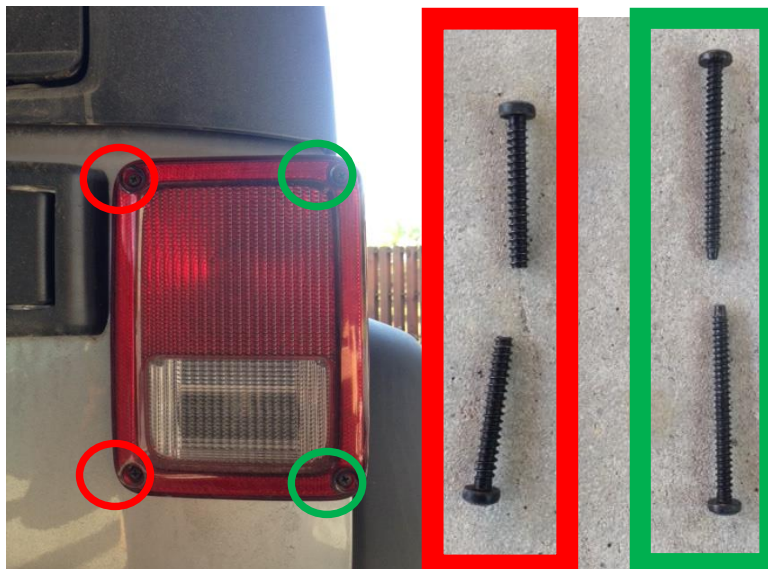

2. Holding the light face up place the four rubber screw buffers onto the screw holes of the lens.



3. Keep the light facing up and place the guard over the light. Slide the screws into the holes to keep the rubber buffers in place.



4. Mount the light back onto the vehicle and secure all four screws. Make sure not to over tighten them.



5. Follow the same steps on the other side.



6. Installation complete!



Installation Instructions Written by ExtremeTerrain Customer Lazaro Gomez 08/12/2015