



1997-2006 Wrangler Headlight Guards

Contents:


(2) - Headlight Guards

Tools Needed:

T15 Torx driver



It is recommended that you have an additional person available to help during this installation, parts can be awkward to hold and support by yourself. Block wheels and set parking brake before beginning work.

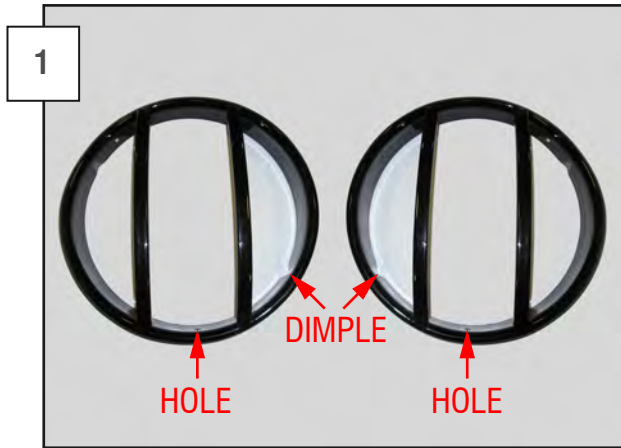

These guards are side specific. Lay both guards face up on a table. Position the center hole at the bottom with the dimple to the lower inside of the guard. This is how they will be installed on the vehicle.



Remove the (3) T15 torx screws holding in the headlight bezel. Put these screws aside, they will be reused for the install of the guards.



Place the headlight guard on top of the head light and secure it with the (3) T15 torx screws that were removed in step 2.