



SUV Tent with Screen Room Set Up Guide

Set Up The Tent

1-Clear sharp rocks and sticks from the ground. Lay out the tent over a flat area.

2-Connect the (4) sections of the steel pole together using the (3) junctions (Fig 1 and Fig 2) as follows:

- Place the long steel pole section over the main tent and place the shorter steel pole section over the screen room. Connect these two pole sections with the junction that is marked with the letter “M”.
- Place the (2) steel pole sections with black end caps into the pockets at the end of each awning. Connect these pole sections to the main pole sections with the junctions that are marked with the letter “A” (Fig 3).

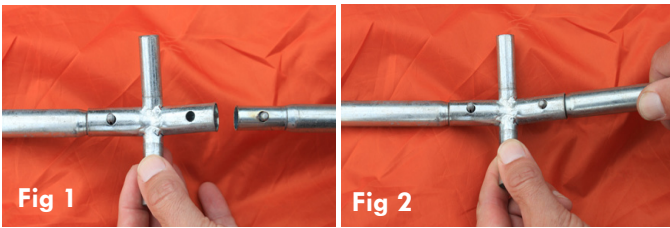


Fig 1

Fig 2



Fig 3

Fig 4

3-Thread the (6) fiberglass poles through the pole sleeves and connect them to the (3) junctions (Fig 4). The fiberglass poles will lay across the tent (Fig 5).



Fig 5

Fig 6

4-Attach the top tent clips to the steel pole (Fig 6).

5-Raise the tent by having one person lift the top steel pole (Fig 7) and a second person bending the black fiberglass poles until their ends go over their corresponding pole pins (Fig 8). Start with the two fiberglass poles at one end of the tent, move to the two middle poles, and finish with the two poles at the opposite end.



Fig 7



Fig 8

WARNING:

Don't use excessive force when bending the tent poles. If there is any resistance, check to see that the pole sleeves are sliding over the poles without hang-ups.

6-Attach the side tent clips to the black fiberglass poles (Fig 9).



Fig 9

The tent has a lower sleeve and an upper sleeve which create an alligator clamping action around the rear of the vehicle.

7-Back the vehicle until its bumper touches the tent (Fig 10) and place the upper sleeve over the rear hatch door (Fig 11).



Fig 10



Fig 11

8-Buckle the (2) short straps on the leading edge of the upper sleeve around the vehicle's roof rack rear cross bar (Fig 12) (it may be necessary to adjust the position of the cross bar). If without a cross bar, clip the (2) long straps provided into the female buckles of the short straps and attach their J-hooks to the windshield wipers (Fig 13).



Fig 12



Fig 13

9-Adjust the baffle inside the top edge of the upper sleeve to keep water, wind, and bugs out.


10-Make sure the lower sleeve is sitting above the vehicle's muffler. Place the buckle strap of the lower sleeve over the top of the vehicle's rear hatch door (Fig 14).




Fig 14

11-Raise the rear hatch door, making sure the buckle strap is tight when the door reaches the top.

12-Attach the (3) orange straps on the lower sleeve to the inside of the vehicle's cargo area (Fig 15).

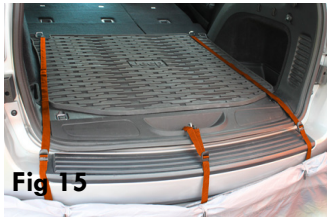

13-Attach the J-hooks of the side straps A and B to the vehicle's wheel well and tighten (Fig 16).

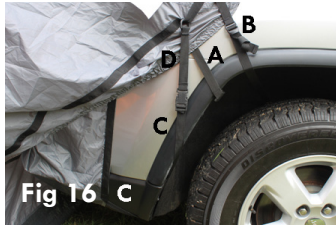

14-Run the lower strap C under the rear wheel well and clip it to the upper strap D (Fig 16).

15-Repeat steps 13 and 14 on the other side of the vehicle.

16-Stake the corners, sides, and guy lines of the tent (Fig 17 and 18).



17-Add the rainfly over the main room of the tent if expecting heavy rain (Fig 19). Connect the (4) corners of the rainfly to the side tent clips and secure the velcro tabs around the fiberglass poles (Fig 20). **Note: the rainfly is shorter on the vehicle side of the tent.**



To have use of the vehicle for the day, disconnect the upper and lower sleeves and zip the vehicle door closed. Secure the upper and lower sleeves to the tent body by the dowel and loop fasteners located around the vehicle door (Fig 21).



Take Down The Tent

1-Disconnect the upper and lower sleeves and move the vehicle away from the tent.

2-Zip up all tent windows and doors, pull out all stakes, and place the stakes in the stake bag.

3-Un-clip the side pole clips, lift the poles from the pole pins, and lower the tent to the ground.

4-Un-clip the top pole clips, disconnect all poles, and place the poles in the pole bag.

5-Fold the length of the tent in half (Fig 22). Fold the width of the tent in 3rds (Fig 23).



6-Place the pole bag and stake bag on the end of the folded tent (Fig 23) and roll the tent as tightly as possible before placing it into the carry bag.

WARNING: KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THIS TENT FABRIC

This tent meets the flammability requirements of CPAI-84. The fabric may burn if left in continuous contact with any flame source. The application of any foreign substance to the tent fabric may render the flame resistant properties ineffective.

www.rightlinegear.com

LIMITED WARRANTY

Rightline Gear warrants that for one (1) year, from the date of purchase that all PackRight and CampRight products will be free of material defect and Rightline Gear will repair or replace any defective or damaged product free of charge if it is returned in original condition by the consumer to Rightline Gear or the place of purchase. Claims of defective material and/or workmanship must be made in a timely manner. Safe and maintenance-free use of this product depends upon the consumer's or user's proper installation of the product and good judgment in its use. Rightline Gear is not responsible for the consumer's or user's use or misuse of this product. Damage to Purchaser's vehicle or any other vehicle caused by Purchaser's improper use of this product may cause serious injury or death. The Purchaser acknowledges that Rightline Gear has no control over the attachment of its products to vehicles or the attachment of items to the Rightline Gear products. Accordingly, Rightline Gear cannot assume responsibility for any damage to any property arising out of the improper attachment or use of its products.

RIGHTLINE GEAR SPECIFICALLY DISCLAIMS ANY AND ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY AND WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. RIGHTLINE GEAR FURTHER DISCLAIMS ANY WARRANTY OR OTHER PROMISE THAT GIVES RISE TO ANY SORT OF CONSEQUENTIAL, EXTRAORDINARY, PUNITIVE, EXEMPLARY, SUBSEQUENT, OR NONECONOMIC DAMAGES OR ATTORNEY FEES. THE CONSUMER OR USER'S SOLE REMEDY AGAINST RIGHTLINE GEAR FOR ANY DEFECT IN THIS PRODUCT IS LIMITED TO FULL RETURN OF THE PURCHASE PRICE.

RIGHTLINE GEAR SPECIFICALLY ENCOURAGES COMPLIANCE WITH ALL MOTOR VEHICLE LAWS, AND EXPRESSLY DISCLAIMS ANY AND ALL LIABILITY FOR FAILURE TO COMPLY WITH SAME.