



SKID PLATE

(2007-2018 Wrangler JK)

INSTALLATION INSTRUCTIONS


CONTENTS

- (1) Skid Plate
- (4) Washers
- (4) Lock Nuts
- (4) Bolts

TOOLS REQUIRED

- Flat Head Screwdriver
- 17mm, 19mm Socket
- Ratchet & Extensions
- 16mm, 18mm Wrench

STEP 1

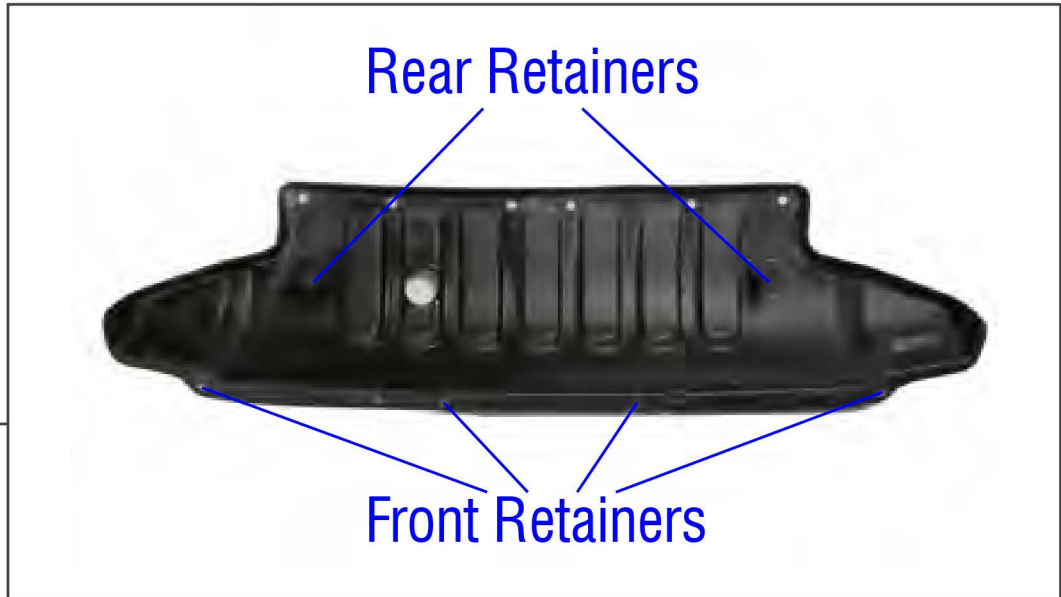

Remove the 4 front and 2 rear plastic push pin, splash shield retainers. Remove splash shield from the vehicle.

STEP 2



Remove the 4 nuts on the backside of the bumper that attach the front bumper to the frame.

STEP 3

Install the supplied bolts through the rear skid plate mount and into the crash bar, then secure with a locking nut.

STEP 4

Install the skid plate to the front side of the frame with the stock nut, or use the bolt that holds an aftermarket bumper to the frame.