



Jeep Wrangler JK (2007-2015) Door Storage Brackets

Contents:


- (1) - Hinge Mount
- (1) - Latch Mount
- (5) - Lag Bolts

Tools Required:

- Stud Finder
- Level
- Tape Measure
- 9/16" Socket & Ratchet
- T50 Torx Bit



****Important:**
Brackets **MUST** be installed into a studs. Failing to do so will result in Door Damage.

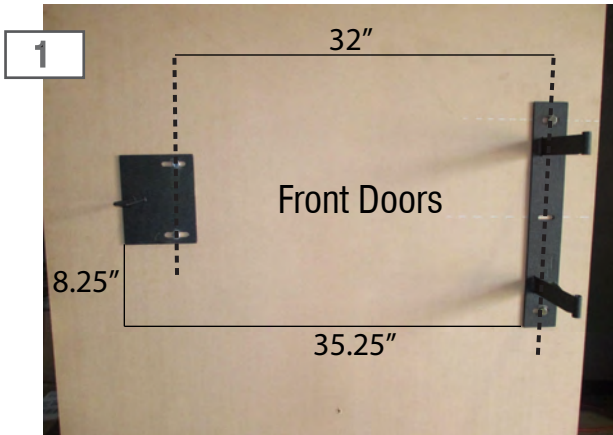


-Locate a suitable location to mount the door brackets. These door brackets require (2) studs to secure the door, one for the hinge and one for the latch.

-Mount the hinge upper hole first. Plum the bracket before mounting the other 2 holes.

-Once the hinge bracket is securely mounted to the wall you can measure for the placement of the latch bracket.



Locate the door hinge brackets and remove the hinge nuts (Torx T50) to allow the door to be removed.

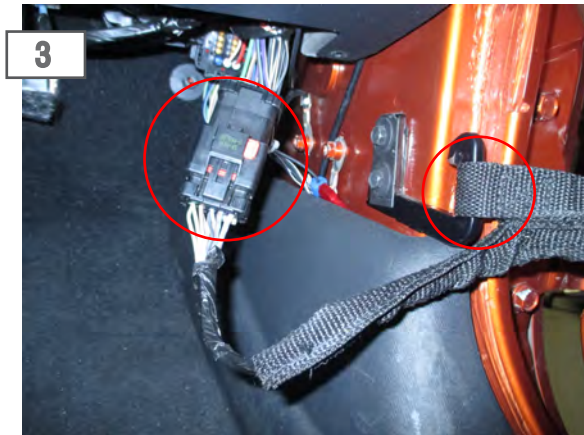

Disconnect the plug that supplies the door electric. Then remove the door strap.



-Once the hinge bracket is securely mounted to the wall. Slide the door onto the bracket.


-Verify the latch bracket location and fasten it securely to the wall.

****Note:** The door may sag under its own weight depending on the condition of the wall it is mounted on. Leveling the door (pulling up on it) may be required to mount the door level on the latch bracket using the provided measurements.





****Important:**
Brackets **MUST** be installed into a studs. Failing to do so will result in Door Damage.

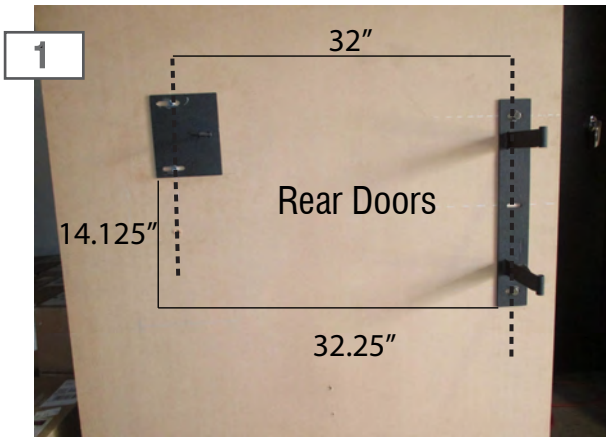

1 -Locate a suitable location to mount the door brackets. These door brackets require (2) studs to secure the door, one for the hinge and one for the latch.

-Mount the hinge upper hole first. Plum the bracket before mounting the other 2 holes.

-Once the hinge bracket is securely mounted to the wall you can measure for the placement of the latch bracket.



2 Locate the door hinge brackets and remove the hinge nuts(Torx T50) to allow the door to be removed.



3 Disconnect the plug that supplies the door electric. Then remove the door strap.



4 -Once the hinge bracket is securely mounted to the wall. Slide the door onto the bracket.

-Verify the latch bracket location and fasten it securely to the wall.

****Note:** The door may sag under its own weight depending on the condition of the wall it is mounted on. Leveling the door (pulling up on it) may be required to mount the door level on the latch bracket using the provided measurements.



5