



Installation Instructions

Roll Bar Covers for Jeep JK Unlimited 2007 up J4RB07**

Tools Required:

10mm socket wrench.

(Optional Tools required if you would like to keep the factory roll bars in tact)

T45 hex wrench




Please read the instruction fully before you begin. The first step is to remove the old roll bar covers..

STEP 1

You will first remove the sound bar this is held on with 6 - bolts recessed into the sound bar. You will need a 10mm socket to do this. Once this is remove you will need to disconnect the power connection plug that is located on the passenger side of the sound bar.

STEP 2

Next you will need to remove the map light from the rear sound bar. This can be done with a slotted screw driver. Carefully insert the screw driver tip in between the clear lens and the plastic frame on the side that presses in to turn on the light. Pry the clear lens slightly and the lens will pull away from the housing. The lens will open up fully and the light can be pulled away from the sound bar. The light does not need to be unplugged. **IF YOU DO NOT WANT TO SAVE THE OLD ROLL BAR COVERS YOU MAY MOVE ON TO STEP #4**

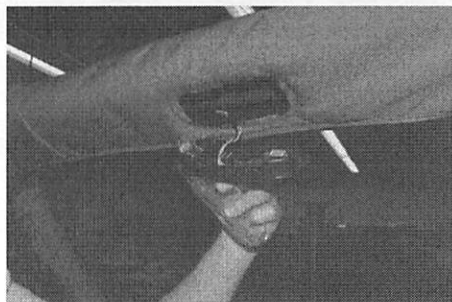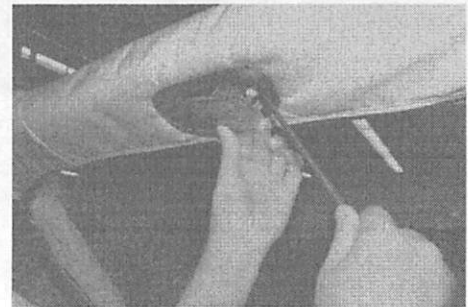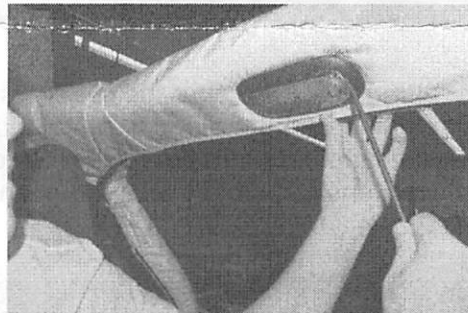

STEP 3 (OPTIONAL)

The rear seat belt needs to be removed from the rear roll bar. A T45 HEX key will be required. You will need blue thread locker on the bolt to re-install after.

STEP 4

Unzip and remove all of the old roll bar covers. You need to cut off the covers around the rear seat belt if you chose not to remove the bolt holding the seat belt on. As you are removing the old covers some of the solid foam around the bars fall off or break off. This needs to be held back in place for the new covers to be installed. The easiest way is to wrap it in place with masking tape.

STEP 5

Install the large rear piece first. Lay it in top of the roll bar first. All the zippers are on the underside of the roll bar. Get all of the zippers started and then go around and finish closing all zipper.

STEP 6

Install each front side piece as shown. You will need to pull down the front cowling to slide the cover in towards the front. Close all the zippers and close the hook and loop closure. Adjust the position of the covers and prepare to re-install the roll bar and light

STEP 7

The sound bar re-install in reverse order from the removal. Plug the power connection back in to the end of the sound bar. There are cut outs on the new covers that allow the body clips and bolts to pass through. You will need to make sure these are aligned correctly. Loosely install all 6 bolts before tightening them up.

STEP 8

Re-install rear map light. Be sure the cut out is lined up with the hole in the roll bar. There are tabs on the back side of the light that need to be folded inward as shown. You will need to hold these tabs in place as you push the light back into the roll bar. Once the light is fully seated back into the roll bar you will close the plastic lens back into place. If the lens does not operate freely. Remove and re-install again.

