

Installation Instructions

Description: Front Bumper - Jeep Wrangler 87-06

No.	Description	Qty	Size	No.	Description	Qty	Size
1	Bumper	1		3	Bolt	6	1/2**1.25**13
2	Washer	6	1/2"				

Section One

Remove the factory front bumper from vehicle by removing the two top and the two bottom bolts. (Figure A) Save these bolts for use later.



Fig. A



Fig. B

Section Two

Position the new bumper on the front of the vehicle. Line up the holes on the frame with the slotted holes on the bumper brackets. Attach the bumper to the frame using the supplied bolts. (Fig B, C)

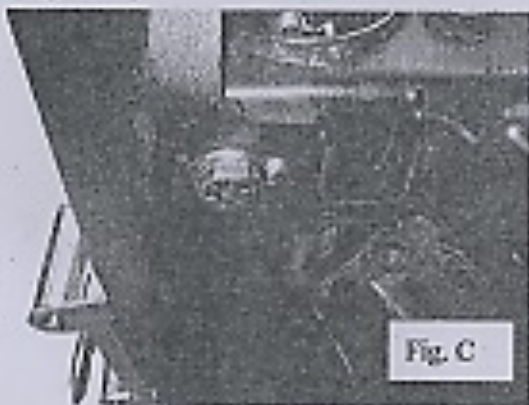


Fig. C

