



## WINDOW VAULT

### To store windows:

- Lay the box down flat so that both of the steel cross bars are on the ground.
- Turn the cylindrical roller that is closer to the outside edge of the box until it is holding almost all of the fabric.
- Take the end of your first soft top window, and place it in the channel between the rollers. (See Figure 1.)
- Turn the roller so that the window begins to wrap around it, protected by a layer of fabric. Continue rolling up the window until it is fully concealed.
- Repeat the previous two steps with the remaining windows.

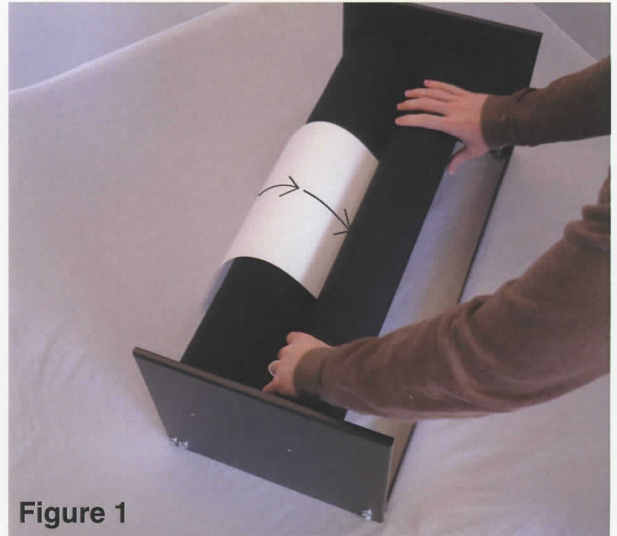


Figure 1

*Paper in images shows where to insert windows*

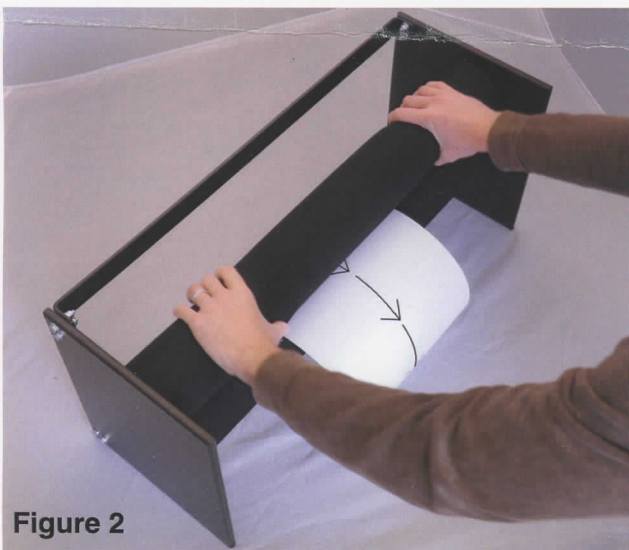


Figure 2

### To remove windows:

- Sit the box upright so that the roller closer to the edge is above the roller closer to the center. (See Figure 2.)
- Start turning the roller that's closer to the edge so that it is taking in fabric.
- Keep turning the roller until your window is out of the box. (See Figure 2.) You may want to remove windows onto a soft or smooth surface to avoid scratching your windows.
- Repeat the previous two steps with the remaining windows in the box.

We thank you and your family for partnering with WD Automotive, and we hope you enjoy using your Window Vault to conveniently and safely store your Jeep soft top windows! If you ever have any questions or concerns, please don't hesitate to contact us.

(206) 317-4433  
CustomerSupport@WD-Auto.com

