


**Step 1\\**  
Remove the push clips holding the bumper trim panel.



**Step 2\\**  
Wash the grille and surrounding areas with soap and water. Allow the grille and surround areas time to dry.  
\*\*Recommended: Wipe the cowl with isopropyl alcohol to ensure the cleanest surface possible.



**Step 3\\**  
Remove the (3) screws securing the headlight trim to the vehicle.

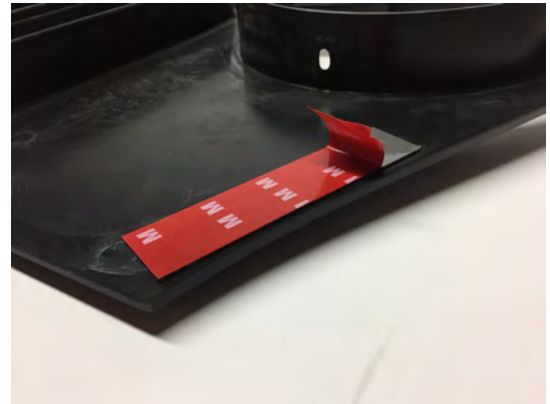

**Step 4\\**  
Test fit the grille cover, then remove the tape backing and install the cover. Apply firm even pressure over the taped surfaced to ensure proper adhesion.



**Step 5\\**  
Install the grille cover using the factory headlight trim screws. Use the provided nuts, bolts, and washers on the upper and lower mounting locations.