

REDROCK^{4X4}

2007-2017 JK Wrangler

Mesh Grille Insert

Contents:

(1) - Grille Insert

Tools Needed:


Flat Head Screw Driver/ Panel Removal Tool

1



Using a panel removal tool, remove the (6) push clips holding the grille cover to the vehicle. Unplug the turn signals and pull the grille cover from the vehicle.

2

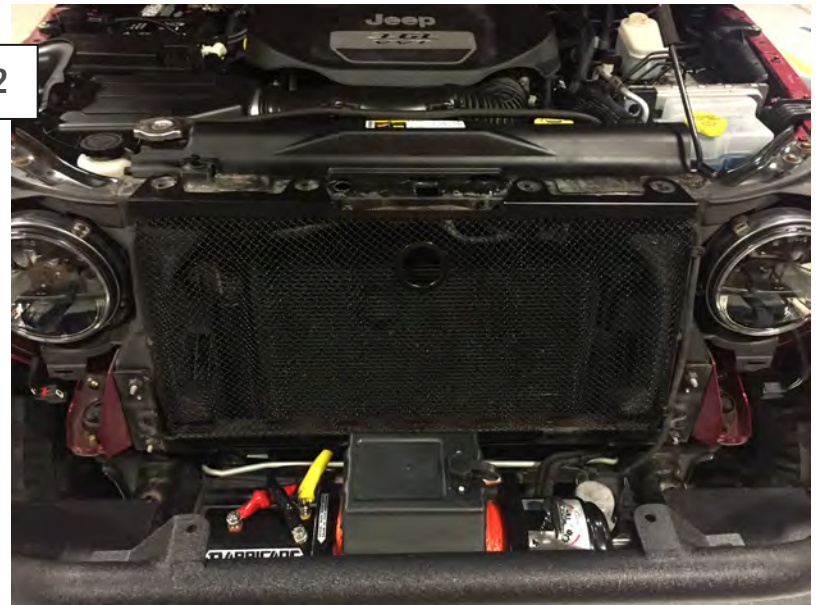

Place the grille insert onto the radiator support. It will be sandwiched between the radiator support and the factory grille and then secured using the factory push clips.

3



Reinstall the grille using the factory push clips.