



LED HEADLIGHTS

(1997-2018 WRANGLER TJ/JK)

INSTALLATION INSTRUCTIONS

CONTENTS

(2) LED Headlights

TOOLS REQUIRED

Flat Head Screwdriver
T15 Torx Driver




STEP 1

Open Hood and remove the six (6) plastic clips holding the grille to the vehicle. There are clips along the bottom of the grille that snap into the metal radiator support. To release the clips, pull the top of the grille away from the vehicle while gently pulling on the bottom edge. Increase pulling pressure slowly, being careful not to aggressively pull, so you don't damage the clips or scratch the grille. Disconnect the turn signal plugs and remove grille from vehicle.



STEP 2

Remove the (4) T15 Torx screws from the headlight bezel.

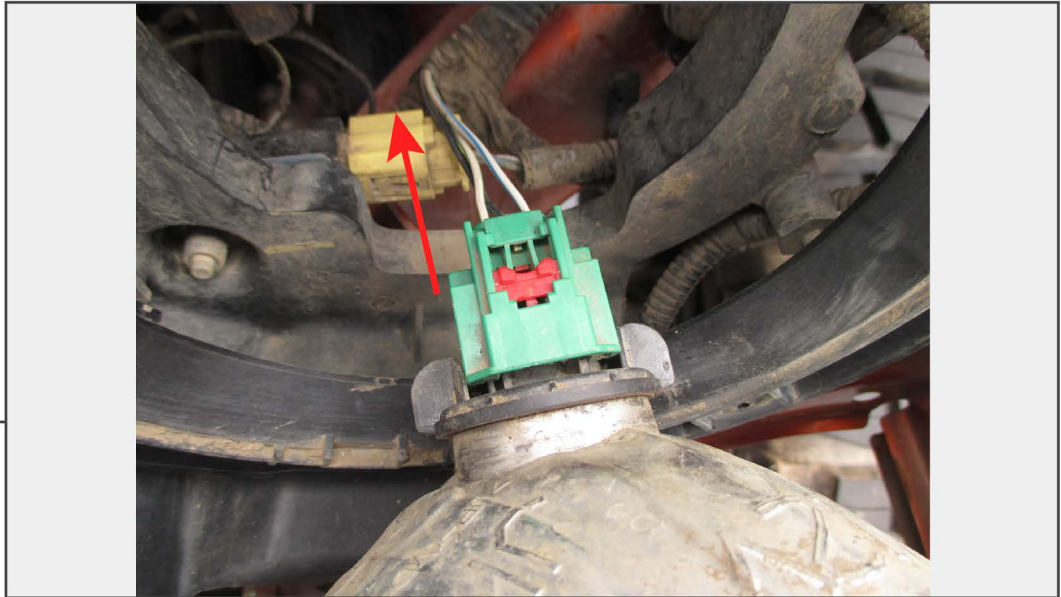

STEP 3

Slide the red retaining clip away from the plug. Then disconnect the plug from the headlight.




STEP 4

Connect the LED headlight using the supplied jumper harness. Firmly press the plugs together and push the retaining clip from the factory harness back into the plug. Reinstall the headlight bezel and repeat the process for the opposite side. Before reinstalling the grille, check to make sure the headlight functions properly. Once proper function is confirmed, reinstall the grille.



STEP 1


Remove the (3) T15 torx screws that secure the outer trim bezel.

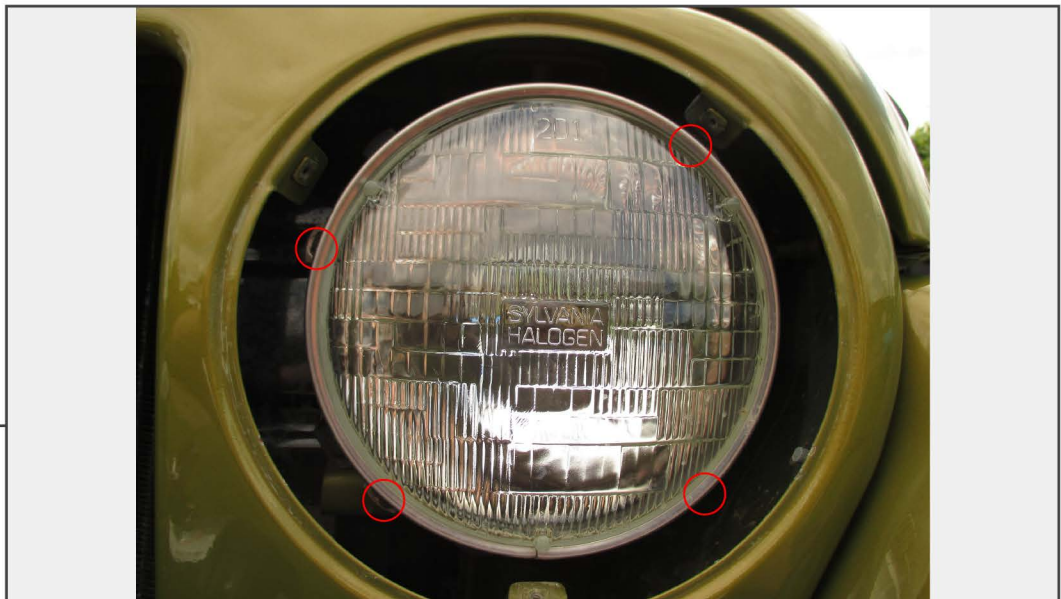

STEP 2

Remove the (4) T15 torx screws that secure the headlight bezel.

STEP 3

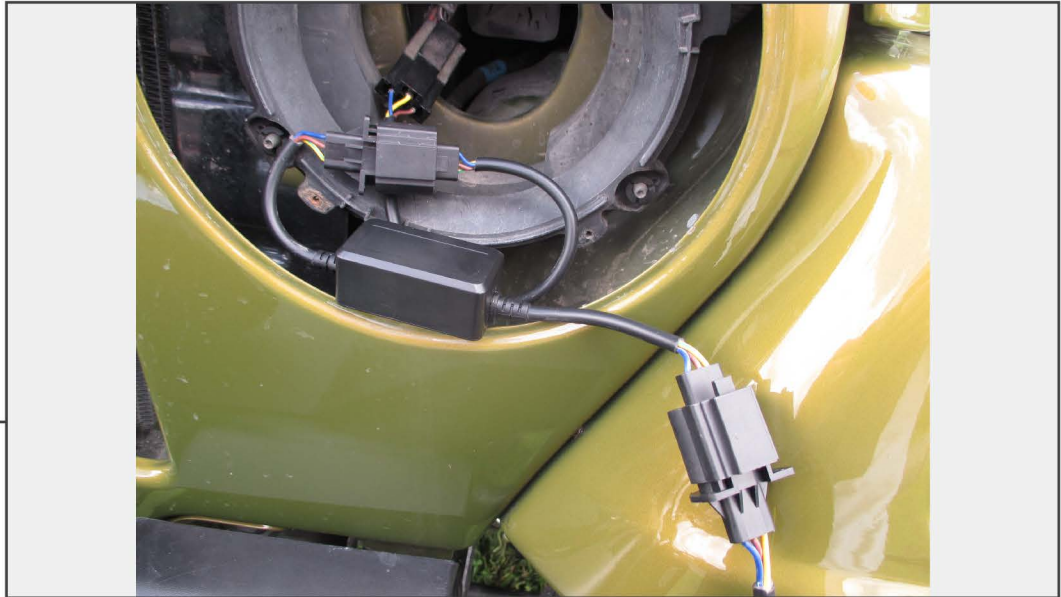

Unplug factory headlight. Connect the LED Headlight using the supplied jumper harness. Firmly press the plugs together and push the retaining clip from the factory harness back into the plug.

STEP 4



Zip Tie and secure any loose wiring components and reinstall the headlight/bezel and outer trim bezel.