

Rugged Ridge Neoprene Rear Seat Cover (07-15 Wrangler JK 4 Door)

Preparation:

Vacuum and clean seat before installing seat covers.

Items included:

2 back seat covers

2 bottom seat covers

2 head rest covers

Tools needed:

Seat covers

Installation instructions


1. Starting with the passenger side of the vehicle. Pull and unlatch seat for up position and slightly pull seat forward.



2. Grab the double seat cover. Slide it over the seat making sure the headrest is fished through the headrest hole. Be sure to fish the seat cover through the seatbelt loop. Then work over to the center seat and pull the cover down and around until happy with the fitment.



3. Zip up the back side of the seat cover.

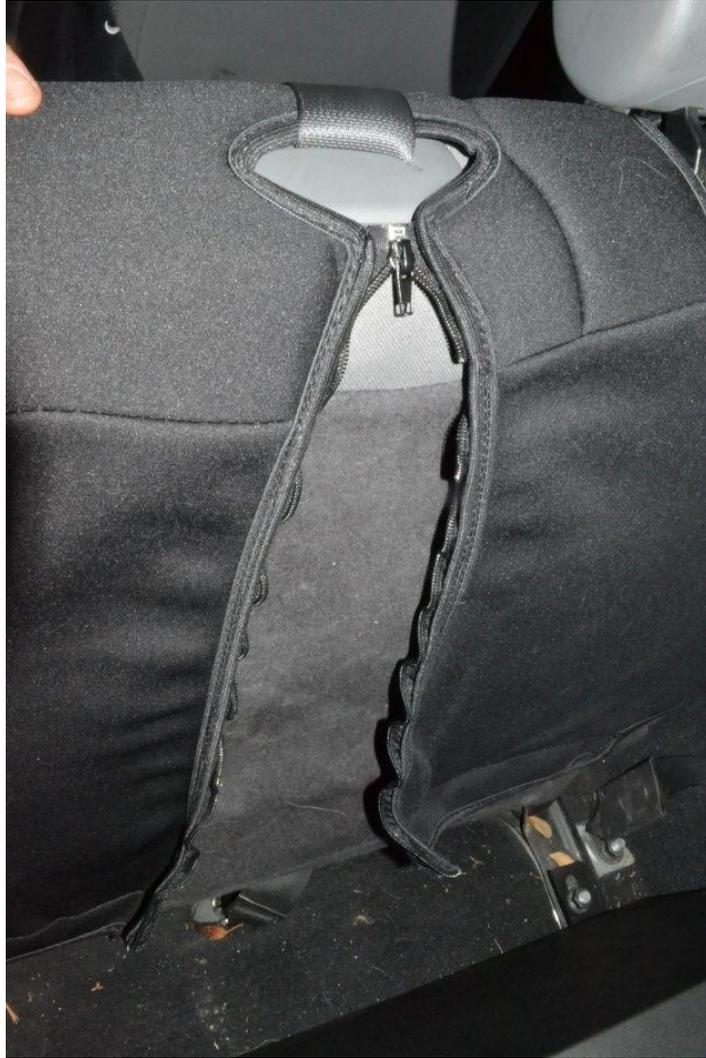


4. Fish the seat cover through the headrest and attach the Velcro.



5. Slide all pieces of the seat cover through the top and bottom cushions and attach the Velcro to the back part of the seat cover.



6. Grab the bottom half of the seat cover and place it around the bottom seat cushion.

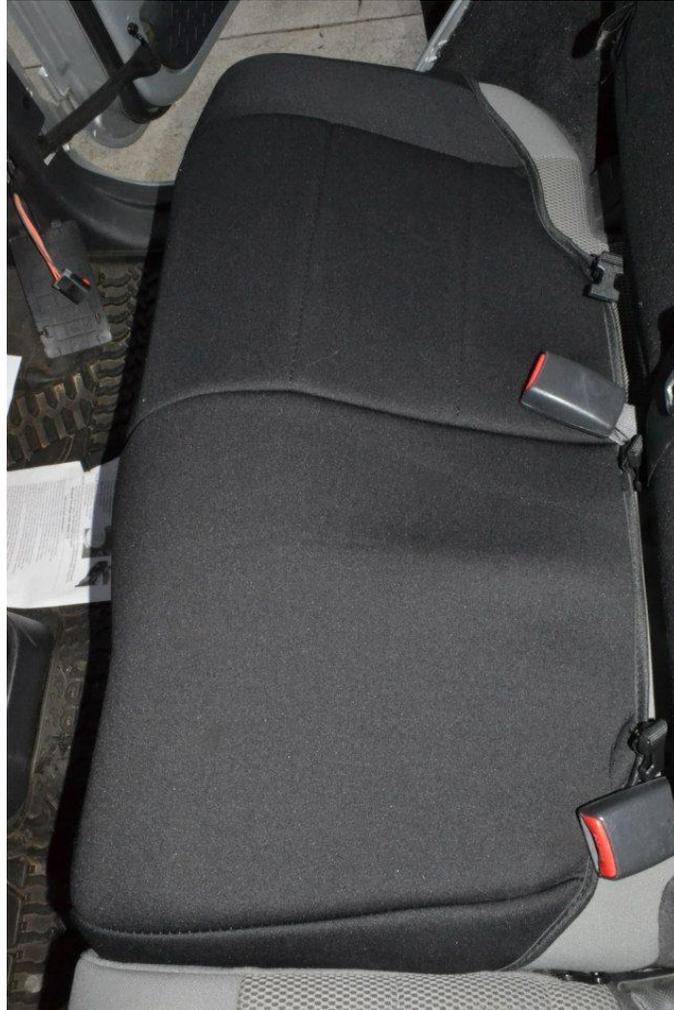


7. Thread the seat cover clips through the top and bottom half of the cushions.




8. Pull the straps under to bottom cushion to the back of the seat and connect the clips.



9. Attach the J-Hooks to the underside of the bottom seat cushion.

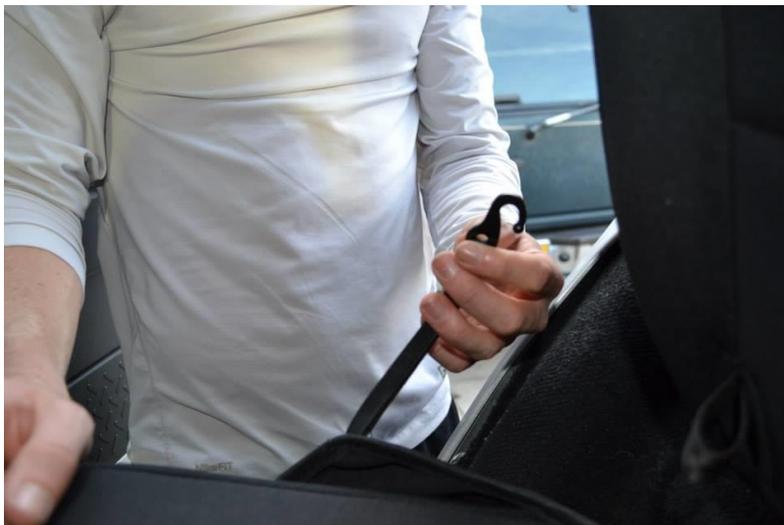

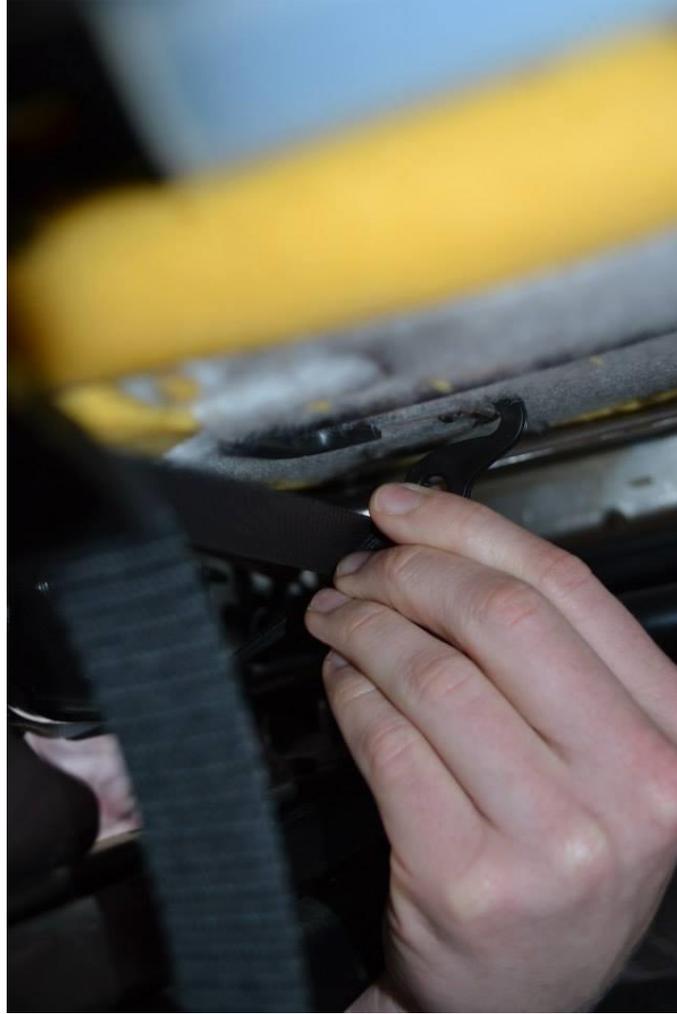

10. Pull head rest cover over headrest




The driver side is much the same but if needed here are some additional instructions:

11. Pull and unlatch seat for up position and slightly pull seat forward.



12. Pull the top part of the seat cover over the cushion and work it down until happy with the fitment.

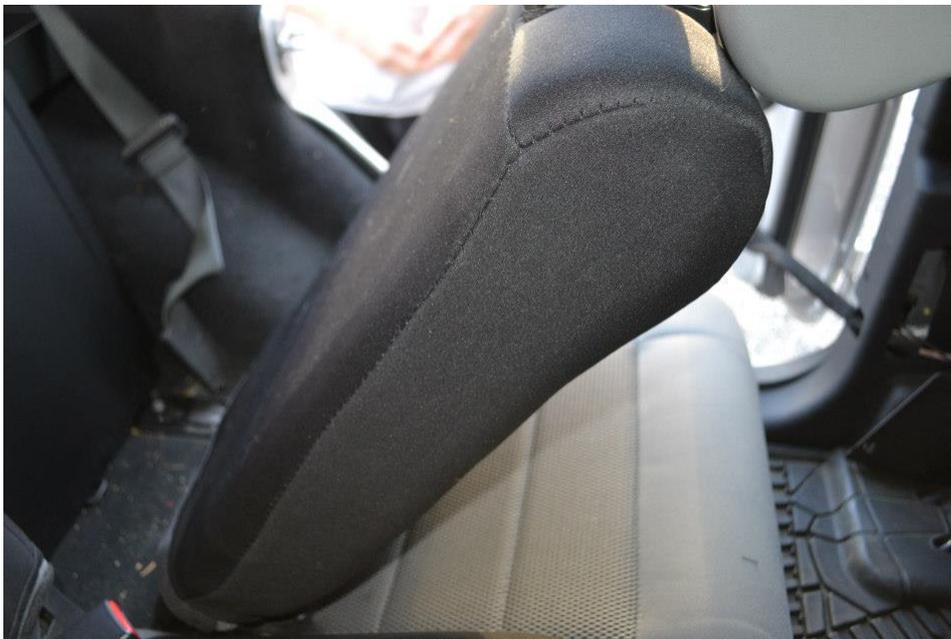

13. Fish the top seat cover through the head rest and attach the velcrow.



14. Fish the bottom seat cover through the top and bottom cushion and connect to the back part of the seat cover.



15. Grab the bottom seat cover and fit it over the bottom cushion. Make sure to pull it all the way down and between the middle and driver side seats.



16. Fish the buckles through the top and bottom cushions and connect them with the straps that are from the underside of the seat.






17. Attach the J-Hooks to the underside of the bottom seat cushion.



18. Grab the head rest cover and put it on over the head rest.



And that's all there is to it, you now have a completely different look to the inside of your jeep.

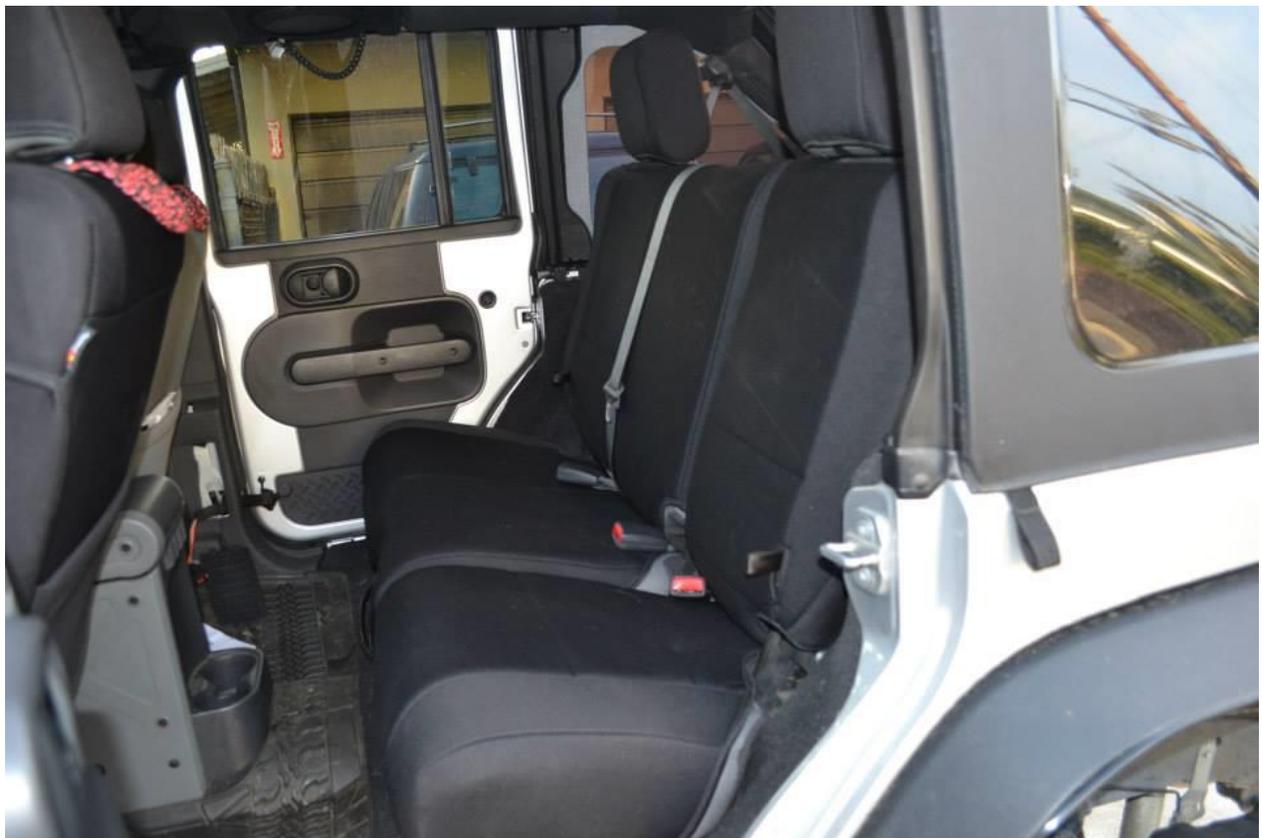

Installation Instructions written by ExtremeTerrain Customer Michael Nielsen 3/4/2015