

## JK Billet Aluminum Oil Cap 3.8L 07-11


Contents: Oil Cap (1)



PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE YOU BEGIN.

Notice: Aluminum holds more heat than plastic. Use caution when removing.

Step 1. Remove the factory oil cap.

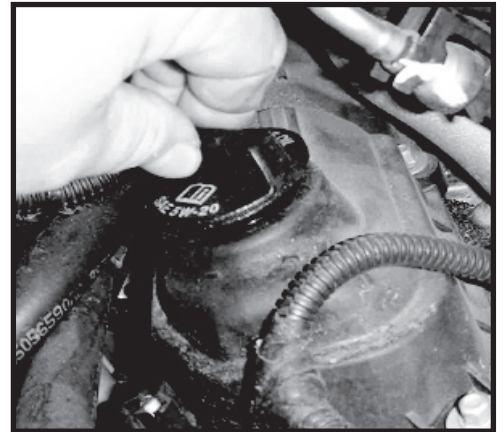

Step 2. Install the new billet oil cap.



Care and Maintenance: Use soap and water to clean the aluminum surface. Regular cleaning will help maintain the appearance. Do not use harsh chemicals.

For Technical Assistance Contact:  
OMIX-ADA Tech Support  
Phone: 1-800-449-6649  
Email: [techsupport@omix-ada.com](mailto:techsupport@omix-ada.com)  
Web: [www.Omix-Ada.com](http://www.Omix-Ada.com)

Copyright Omix-Ada 2011