



LED Headlights w/Halo

Tools Needed:

- Panel Removal Tool
- Flat Head Screw Driver
- T15 Torx Bit

Contents:

- (2) Headlights
- (4) Scotch Locks
- (2) Headlight Harness Connectors




Step 1:

Using a panel removal tool, remove the (6) push clips holding the grille cover to the vehicle. Unplug the turn signals and pull grille cover from the vehicle.



Step 2:

Using a flat head screw driver, carefully pry against the (3) plastic tabs holding the light into the sockets. Gently pull headlight away from the tabs.

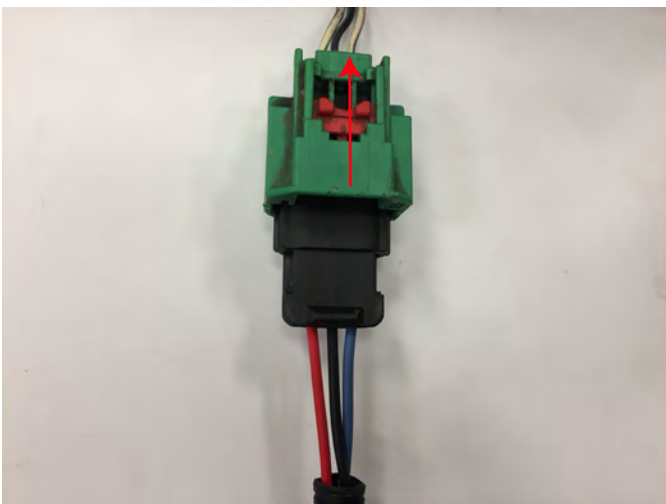

Step 3:


Slide the red retaining clip away from the plug. Then disconnect the plug from the headlight.



Step 4:

Using the supplied scotch locks, splice the halo wiring into the factory wiring as follows:

Side Marker Harness	-	Halo Wiring Harness
Black	-	Black
White	-	Brown

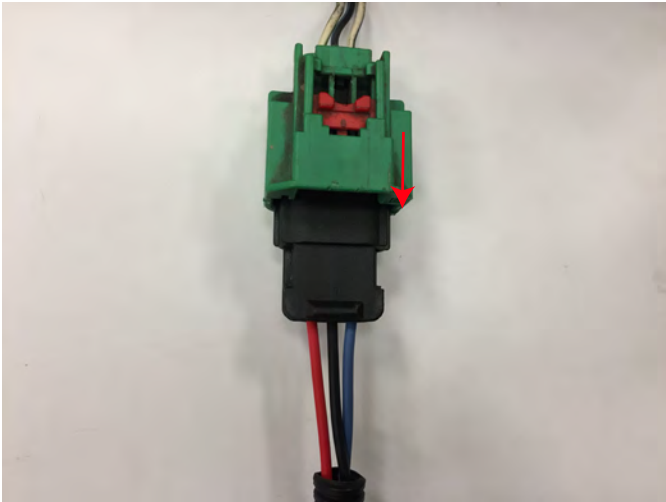

Step 5:
Connect the factory headlight harness into the supplied headlight harness connectors, and then into the back of the LED headlight. Push in the red clip to lock harness in place.



Step 6:
Headlight Adjustment: Using a T15 torx bit, turn the adjuster clockwise to adjust the light up. Turn the adjuster counter-clockwise to adjust the light down.



Step 7:
Reinstall the grille in reverse order.