



7" LED Headlight w/LED Halo & Signal Light

- Tools Needed:**
 Panel Removal Tool
 Flat Head Screw Driver
 T15 Torx Bit
- Contents:**
 (2) Headlights
 (2) Adapter Harnesses
 (2) Anti-Flicker Harnesses
 (1) Wiring Leads for Turn Signal and Halo




Step 1:
 Using a panel removal tool, remove the (6) push clips holding the grille cover to the vehicle. Unplug the turn signals and remove the grille cover from the vehicle.



Step 2:
 Using a T15 Torx bit, remove the (4) torx screws securing the headlight to the vehicle.



Step 3:
 Slide the red retaining clip away from the plug. Then disconnect the plug from the headlight.

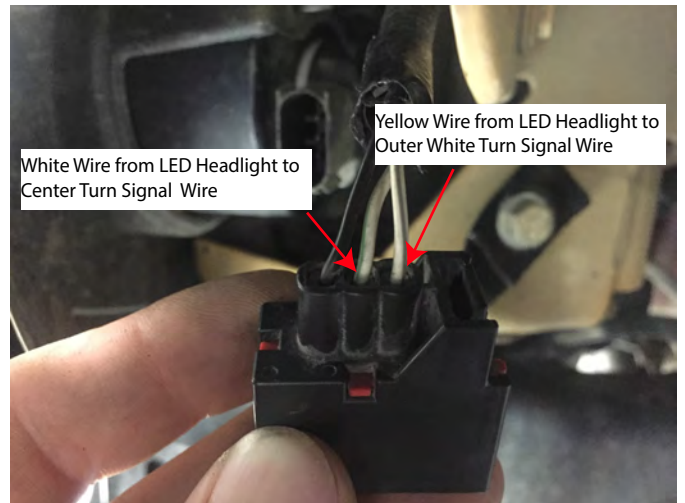


Step 4:
 Using the supplied wiring leads, splice into the factory turn signal harness as follows:

Turn Signal Harness	-	LED Headlight Harness
Outer White Wire	-	Yellow
Center White Wire	-	White



Step 5:

Connect the adapter harness to the anti-flicker harness as shown.

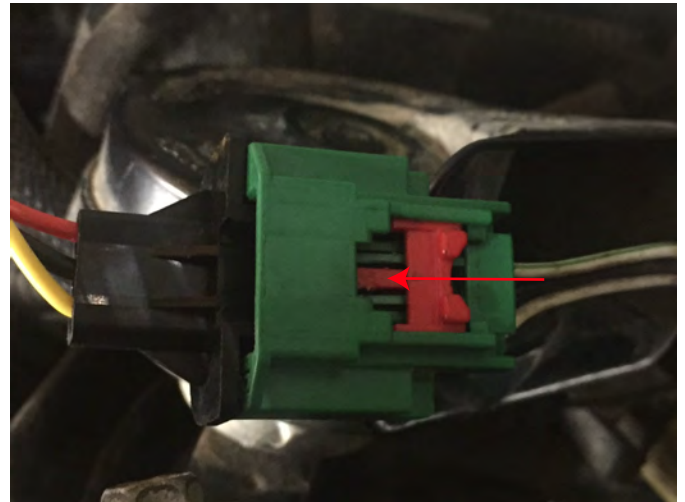

Step 6:

Connect the LED headlight harness to the vehicle. ****Note:** The factory headlight plug clip is prone to breaking. Ensure you have a solid connection. If you can not push in the locking tab, you must use a zip-tie to ensure the plugs stay connected. Test the lights prior to reinstall the grille.



Step 7:

Headlight Adjustment: Using a T15 torx bit, turn the adjuster clockwise to adjust the light up. Turn the adjuster counter-clockwise to adjust the light down.



Step 8:

Reinstall the grille in reverse order.