


# 07-18 JK Hood Lock Installation Guide

## Contents:

- (1) Lock Assembly
- (2) Keys
- (4) Rivets
- (6) Push Clips


## Tools Required:

- Rivet Gun
- Pry Tool

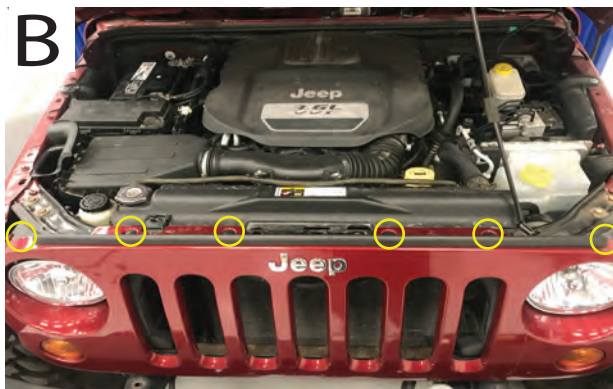


### //Step 2.

Remove grille from vehicle by removing (6) plastic push clips on top of the grille [B]. Once removed, firmly pull the grille away from the vehicle to dislodge the lower clips. Make sure to disconnect the turn signals from the grille upon removal.

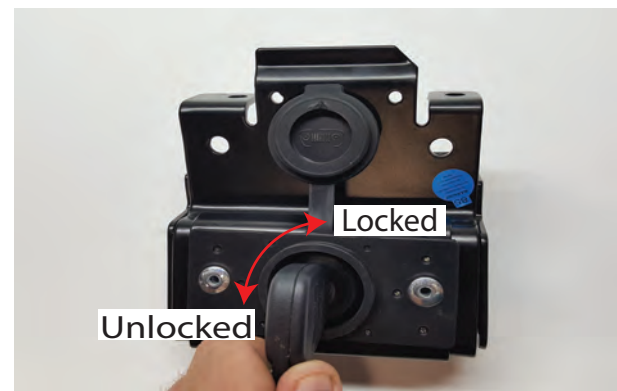

### //Step 4.


Once lock is riveted into place, reinstall grille onto the vehicle using the (6) provided push clips. Close hood using the side latches. Once hood is closed, turn key clockwise 90 degrees to lock hood and key can be removed. Installation complete.

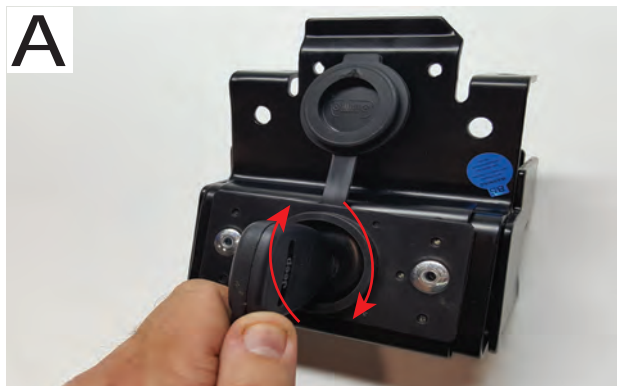

### // Step 1.

Remove vehicle ignition key from any keychain. Install key into lock assembly, and turn key 180 degrees clockwise [A] to code the key to the lock. Turn the key counter clockwise 90 degrees (unlocked position) and leave key in this orientation throughout the remainder of this install.

\*\*Note: Do not pull up or down on the key during coding procedure. Cycle key multiple times prior to riveting lock to crossmember to confirm successful key coding.

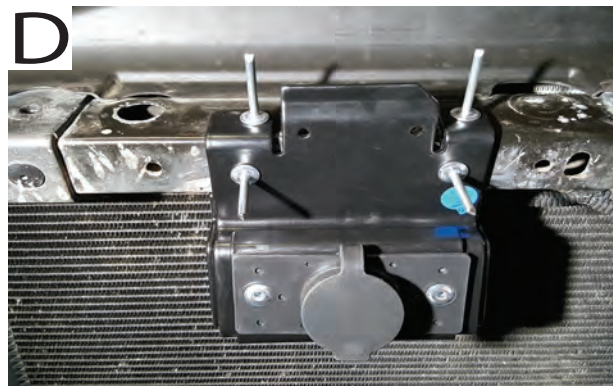

### // Step 3.

Using a pop rivet run, install the (4) provided rivets into the crossmember with the lock in place to secure lock assembly [D].