


JK Crossover Roof Rack System Installation Guide

Contents:

- (2) Crossover Bars
- (4) Hard top Brackets
- (4) Crossover Brackets
- (4) M10x1.50 50mm Bolts
- (8) M10 Lock Washers
- (4) M10 Nuts
- (4) M10x1.50 Folding Bolts
- (8) Small (20mm Diameter) M10 Flat Washers
- (4) Large (25mm Diameter) M10 Flat Washers
- (4) Concave Washers
- (8) Felt Pads


Tools Required:

- 16mm Wrench
- 16mm Socket

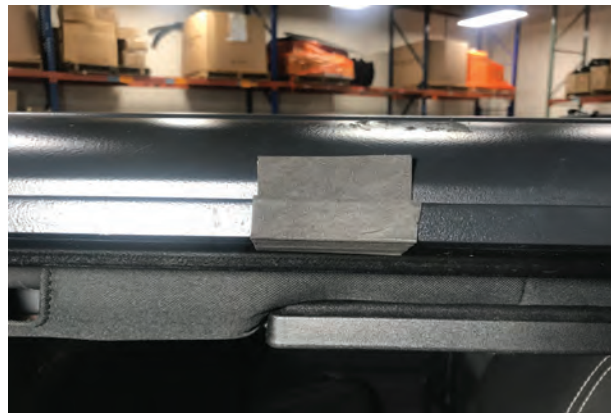

//Step 2:

Once all four brackets are assembled, locate desired install location on roof. Using the (8) felt pads, stick the pads to the hard top to the desired location to prevent damage to hard top.

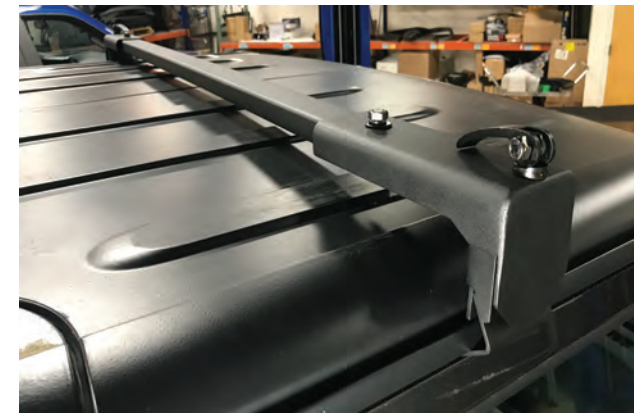

//Step 4:

Once brackets are attached to the hard top, install the crossover bars sliding them under the hard top brackets, then using (2) M10x1.50 50mm bolts, (2) M10 lock washers, and (4) M10 (20mm diameter) washers per bar to secure them. Once secured, flip the handle on the folding bolts on each hard top bracket, and installation is now complete.



// Step 1:

Begin by assembling the roof brackets by using (1) crossover bracket and (1) hard top bracket. Slide the hard top bracket onto the crossover bracket, then install (1) M10x1.50 Folding bolt, (1) concave washer, (1) M10 lock washer, and (1) M10 large (25mm diameter) flat washer to secure the two brackets together. Do this for all provided brackets.

**Note: Leave loose for now for adjustments later.



//Step 3:

Install brackets onto hard top by sliding the lower portion into the channel. Tighten the folding bolt snug, but do not flip the handle over. Do this for all four brackets.