


18+ JL LED Tail Lights Installation Guide

Contents:

- (2) LED Tail Lights
- (4) LED Resistors

Tools Required:

- T40 Torx Socket
- Ratchet

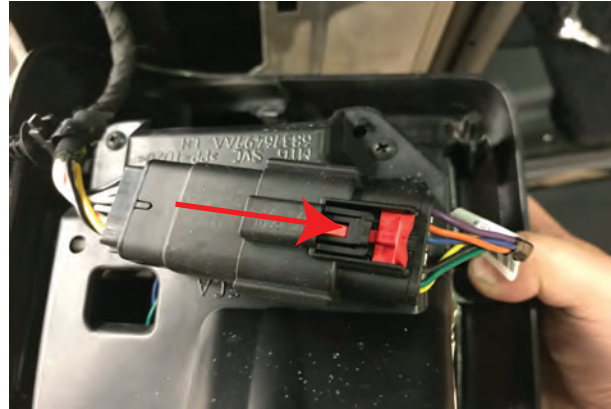

//Step 2:

Once the tail lights are removed, unplug the original tail light from the vehicle. First, push down on the red tab, and then slide it back towards the plug. Then, press on the black part on the plug and slide the harness out.



//Step 4:

Reinstall LED tail light into vehicle by aligning the alignment tabs with the vehicle, then secure in place by reusing original tail light bolt. Tighten and reinstall original plastic bolt cover.



// Step 1:

Begin by removing the plastic bolt cover inside the vehicle, then using a T40 Torx Socket, remove the (1) bolt holding the tail light in.

**Note: Tail light bolt will be reused during re-installation.



//Step 3:

With the tail light removed, clean the tail light enclosure using soap and water. Once dried, remove tape backing and stick the (2) resistors inside the vehicles panel.



//Step 5:

Repeat procedure to opposite side, and installation is now complete.