


07-18 JK LED Headlights Installation Guide

Contents:

- (2) Headlights
- (2) Headlight Harnesses
- (4) Zip Ties
- (2) Halo Wire Extensions

Tools Required:

- T15 Torx or Phillips head Screwdriver
- Panel Removal Tool

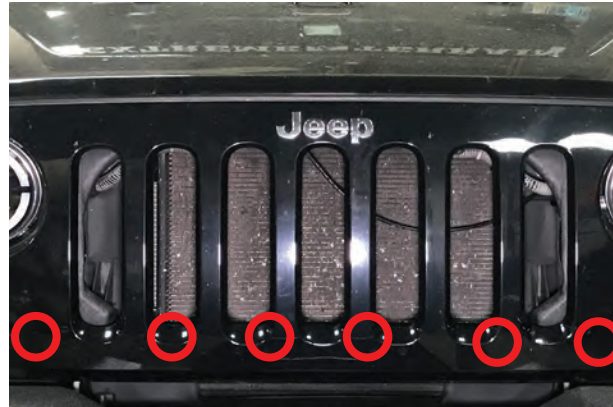

//Step 2:
Pull firmly on the lower portion of the grille to unlatch (6) clips in the lower radiator support.




//Step 4:
Using the included halo extension harnesses, route the end with the male connector into the headlight bucket area. Wire the bare end to a 12 volt ignition source.




// Step 1:
Using a panel removal tool, remove (6) plastic push clips.

****Note:** These clips will be reused.

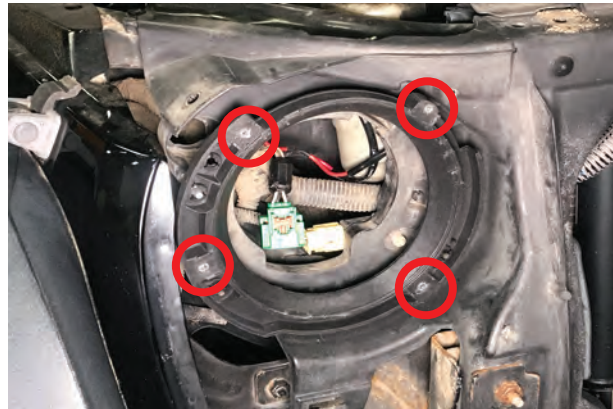


//Step 3:
Remove the (4) screws holding the original headlight into the bucket. Once removed, unplug the headlight and remove from vehicle.

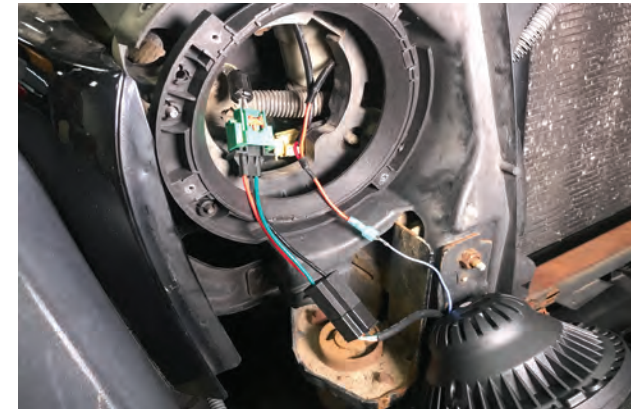

//Step 5:
Once the harness has been wired, plug the harness into the headlight, as well as the original headlight harness into the new headlight.

****Note:** On older vehicles it may be necessary to zip tie factory headlight plug to the new headlight wiring connection. This is due to the factory plug becoming dirty/brittle over time. A zip tie ensure a solid connection.

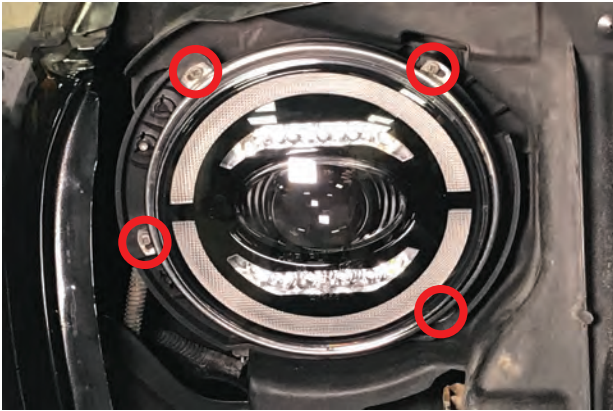

//Step 6:

Install new headlight into original headlight bucket reusing (4) screws.



//Step 7:

Reinstall grille by clipping the lower (6) radiator support clips first, then the upper (6) plastic push clips. Once the grille is in place, installation is complete.