

SKU: J132830

License Plate Relocation Bracket Installation Guide

Contents:

- (1) Hub Mount
- (1) License Plate Bracket
- (1) License Plate Delete Plate
- (2) M6x1.00 Bolts
- (2) M6 Washers
- (2) Wing Nuts
- (2) Scotch Locks
- (2) Male Spade Connectors
- (2) LED Lights
- (3) Bracket Retaining Clips

Tools Required:

- 10mm Wrench
- 7, 21mm Sockets
- Breaker Bar
- Torque Wrench
- Flathead Screwdriver
- Wire Strippers



//Step 2:

Slide the hub mount onto the spare tire holder in the orientation shown above. Use the (3) bracket retaining clips to secure the hub mounting to the carrier studs.



//Step 4:

Mount the License Plate Bracket by using (2) M6x1.00 bolts, (2) M6 washers, and (2) wing nuts. Insert the studs so the square section aligns with the square section on the bracket. Tighten nuts until secure.



// Step 1:

Remove spare tire from vehicle using a 21mm socket.



//Step 3:


Reinstall spare tire onto the vehicle without center cap, then secure lug nuts using a 21mm socket and torque to original specifications.




//Step 5:

Install the license plate onto the license plate bracket. Hold the license plate to the carrier, then route the LED light wiring through the screw holes on the plate and bracket. Secure the light to the plate using a 10mm wrench.

**Note: Make sure the LEDs are facing down to illuminate the license plate.

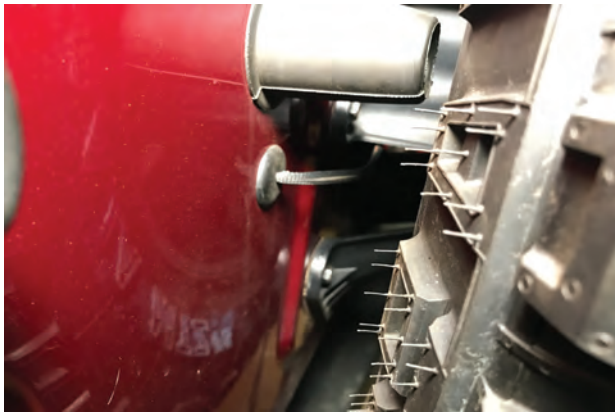

//Step 6:
Route the LED wiring through the center cap hole on the wheel and through the spare tire mount. Run the wiring through the grommet in the tailgate.

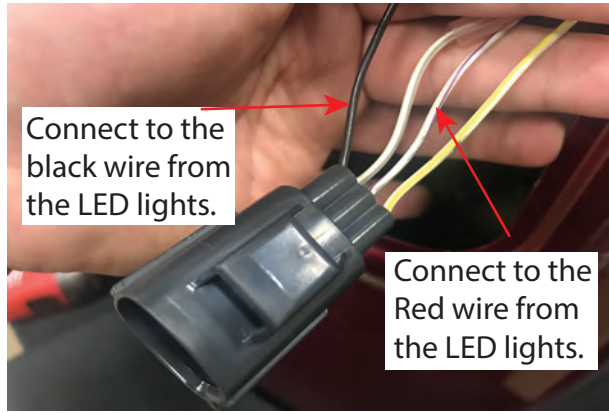

//Step 8:
Using the provided wire connectors, splice the LED lights into the tail light harness.

LED Light Wiring		Vehicle Wiring	
Red	-	White/Purple Stripe	
Black	-	Black	



//Step 10:
Remove the wiring harness clip from the housing by gently prying up on the tab to release the harness. Unplug original license plate light by pressing on plug and separating.



//Step 7:
Remove the tailgate panel by prying on the lower portion to release the push clips. Remove panel and route the LED wiring along the factory 3rd brake light wiring. The LED wiring will be going to the passenger side brake light.



//Step 9:
Remove the original license plate mount using a 7mm socket and remove the (4) screws.



//Step 11:
Remove the (2) screw inserts from the vehicle. Then clean the surface with isopropyl alcohol. Peel double sided tape from the delete plate and stick to vehicle. Once delete plate is installed, installation is complete.