



THANOS GRILLE

(2018+ JL Wrangler)

INSTALLATION INSTRUCTIONS

CONTENTS

- (1) Grille
- (1) LH Trim Panel
- (1) RH Trim Panel
- (6) Screw Clips
- (6) Screws
- (6) Push Clips

TOOLS REQUIRED

- Panel Removal Tool
- Phillips Head Screw Driver
- Flat Head Screw Driver

SKU # J133516-JL



STEP 1

Begin by opening and supporting the hood. Using a panel removal tool or a flat head screw driver, remove the push clips that secure the foam weather stripping. There are (2) push clips per side and the foam is taped on the center. Carefully pull the foam off the tape.

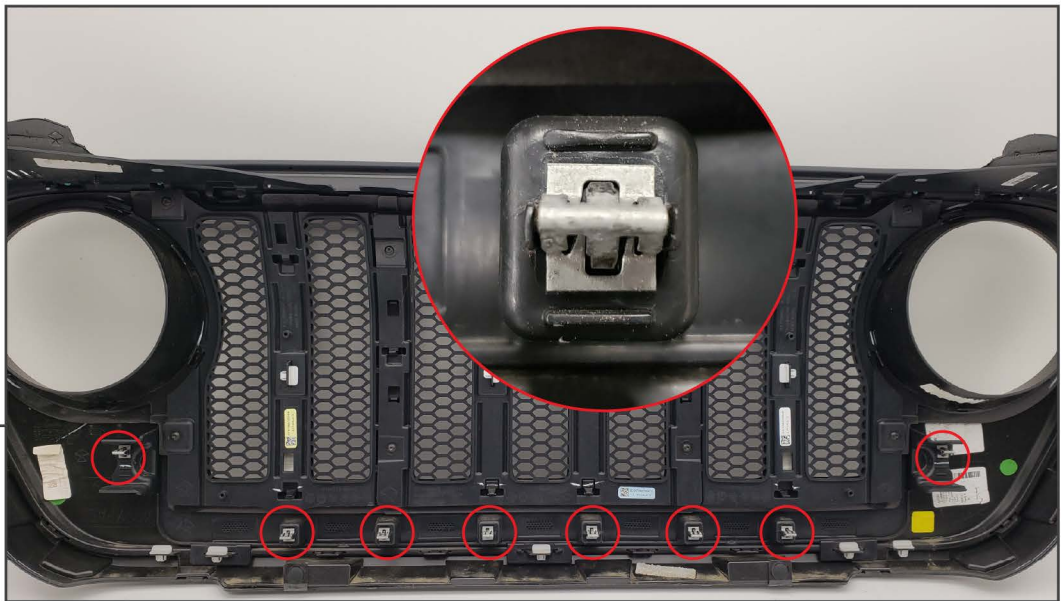


STEP 2

Using a soft pry tool or screw driver, remove the weather stripping that runs across the top of the grille. The weather stripping is held down by small green clips, carefully pry the clips off the factory grille.

**STEP 3**

Using a soft pry tool or screw driver, remove the plastic push clips that secure the grille to the vehicle. Pry the center of the clip up to unlock it, then pull the entire clip out of the grille. The bottom of the grille is secured to the vehicle with additional clips, firmly pull the grille away from the vehicle to dislodge these clips.

**STEP 4**

Using a flat head screw driver, remove the (8) metal clips from the back of the grille.



STEP 5

Install the clips removed in Step 4 onto the new grille.



STEP 6

Install the grille trim panels using the supplied Phillips screws and clip nuts. The clip nuts are used as nuts, they will not be clipped onto anything. Reinstall the grille onto the vehicle. Ensure the lower clips are seated by pressing on the grille in each clip location.



STEP 7

Install the weather stripping removed in Step 2. Center the weather stripping and press the push clips into the new grille.



STEP 8

Install the foam corner removed in Step 1 using the factory push clips.

STEP 9



Finish installing the grille by securing the top of the grille to the vehicle using the supplier plastic push clips.

STEP 10



Installation is now complete. Keep the grille clean by washing it with automotive grade soap and water.