



Installation Instructions:

(Part # SB76880)
XRC Armor Front Fender Kit




WARNING: Check with Local and State laws before installing this accessory!

NOTE: Carefully read entire instructions thoroughly before attempting to install this part.

<u>Parts Included:</u>	<u>Qty</u>	<u>Parts Included:</u>	<u>Qty</u>
93-5909 Front Fender: Drvr	1	1/4"-20 SS Button Head Bolt	12
93-5917 Front Fender: Pass	1	1/4"-20 SS Nylock Nut	12
93-5921 Fender Lip Guard: Drvr	1	10-24 X 3/4" Hex Bolt	3
93-5922 Fender Lip Guard: Pass	1	10-24 SS Nylock Nut	3
90-4275 Fender Liner: Drvr	1	90-6746 Hardware Pack: Inner Fender Liner	1
90-4276 Fender Liner: Pass	1	Plastic Retainers	28
93-5923 Outer Duct	2	90-6747 Hardware Pack: Nutcert	1
93-5924 Inner Duct: Drvr	1	3/8" Nutcert	2
93-5925 Inner Duct: Pass	1	90-6774 Hardware Pack: Nutcert Installation	1
90-6745 Hardware Pack: Fender	1	96-5951 Nutcert Tool	1
3/8" X 1" SS Button Head Bolt	32	3/8" Star Washer	1
3/8" Flat Washer	32	3/8" X 2" Socket Head Bolt	1
3/8" Nylock Nut	32	3/8" Gr. 8 Flat Washer	1
3/16" X 1" Self Tapping Screw	4	3/8" Gr. 8 Nut: Un-plated	1

IMPORTANT!: In order to install these fenders the wiper cowl panel and the side cowl panels must be removed from the vehicle.

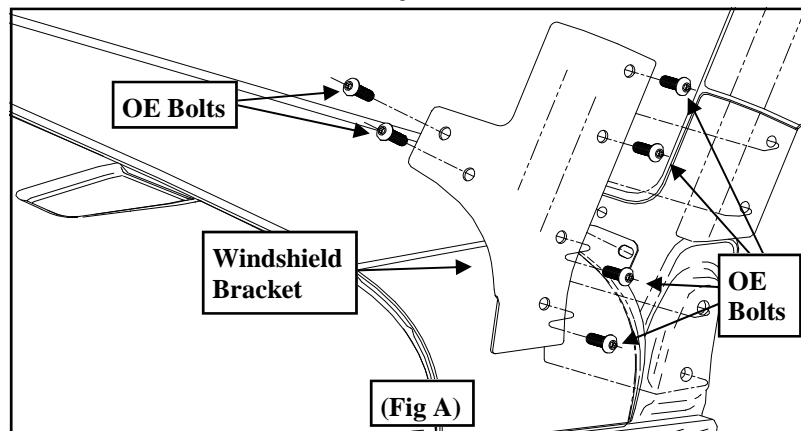


For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions: (Part # SB76880) XRC Armor Front Fender Kit

INSTALLATION:

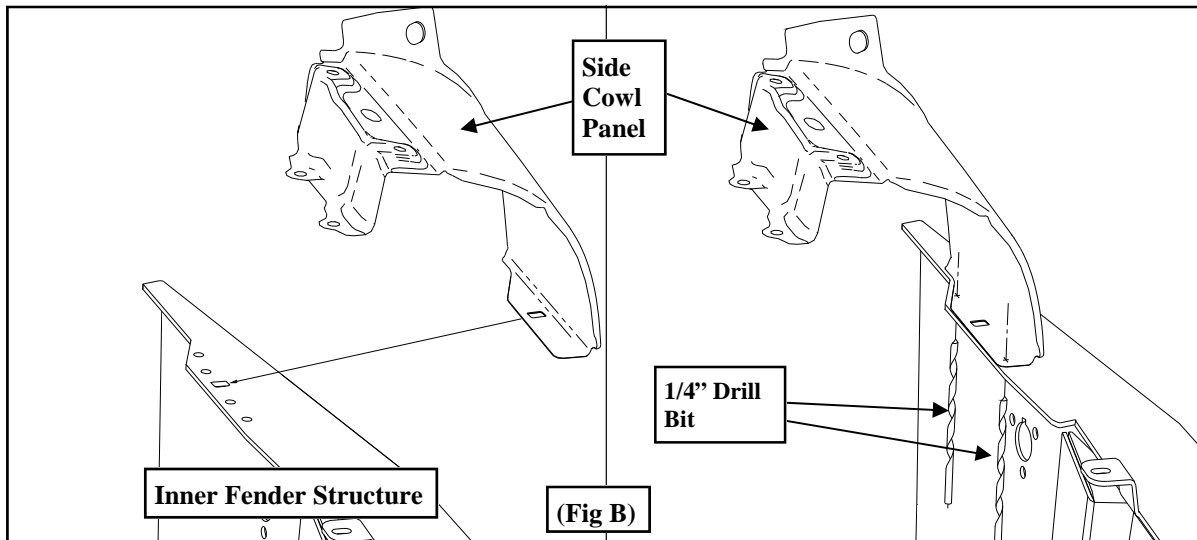

Step 1: Working on one side of the vehicle at a time, unbolt and remove the windshield brackets from the vehicle. Save hardware for reinstallation. (Fig. A)

Step 2: Remove the windshield wipers from the wiper cowl panel.

Step 3: Remove the wiper cowl panel to expose the fender bolts.

Step 4: Fold back the side cowl panel, as if it were hinged on the spot weld seam, to expose the spot welds. Drill out the spot welds on the side cowl panel to fender seam using a 1/4" drill bit. Remove the side cowl panel from the vehicle. (Fig. B)

NOTE: Once removed, clamp the cowl panel to a work surface and bend the panel back to it's original shape. Save for reinstallation.

Step 5: Unbolt the OE hood catch from the OE fender. Save catch and hardware for reuse.

NOTE: Steps 6 and 7 are for the passenger side fender Only!:

Step 6: Unplug the antenna wiring. Loosen and remove the antenna mast. (Fig. I)

Step 7: Pry the plastic cap off the base and unfasten the antenna base from the fender. Save for reinstallation. (Fig. I)

Step 8: Remove the OE inner fender liners from the vehicle. Save The OE Hardware for reinstallation.

Step 9: Unbolt the OE fender bolts and remove the fender from the vehicle. Save the hardware for reinstallation.

NOTE: The fenders are spot glued and will require some persistence to remove them.

Step 10: Cut the OE fender bracket off the inner fender structure. It will no longer be needed. (Fig. C)

Step 11: Test fit the new fenders (93-5909 drvr and 93-5917 pass) by hanging them in place and installing a few OE bolts.

Step 12: With the fender in it's appropriate position, Use the lowest 3/8" wheel well hole as a guide and drill a hole through the inner fender structure. (Fig. D)


Step 13: Remove the fender from the vehicle.

For Technical Support/Warranty Information please call 310-762-9944




Installation Instructions:

(Part # SB76880)
XRC Armor Front Fender Kit

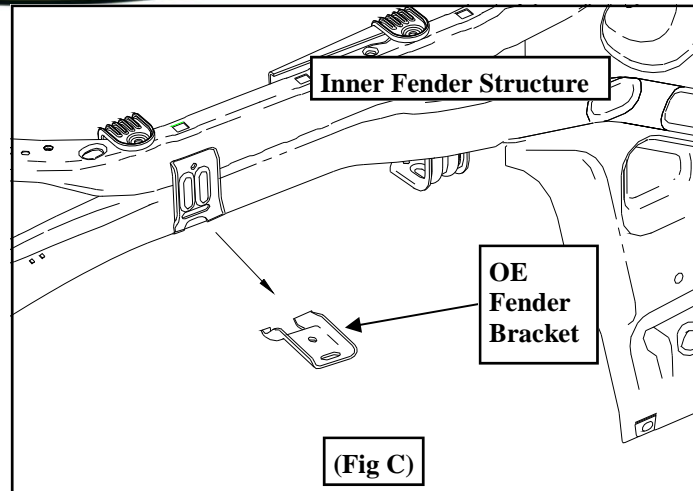

Step 14: Drill out the previously drilled hole in the inner fender structure from 3/8" to 1/2". Install the 3/8" nutcert into the 1/2" hole. (Fig. D)

NOTE: If you do not have a professional nutcert installation tool, use the 2 1/2" X 3/8" socket head bolt, 3/8" nut and washer. Install the nutcert into the 1/2" hole on the vehicle. Thread the nut up as far on the 3/8" bolt as it will go and then follow that with the washer. Thread the bolt, nut, washer, nutcert tool (96-5951) and star washer assembly into the nutcert. (Fig. D) While holding the 3/8" bolt with an Allen wrench, tighten the nut and washer down against the nutcert. Use the nutcert tool and star washer to keep the nutcert body from spinning while tightening the 3/8" bolt. Once the nutcert is properly installed into the vehicle remove the 3/8" bolt, nut, washer, nutcert tool (96-5951) and star washer.

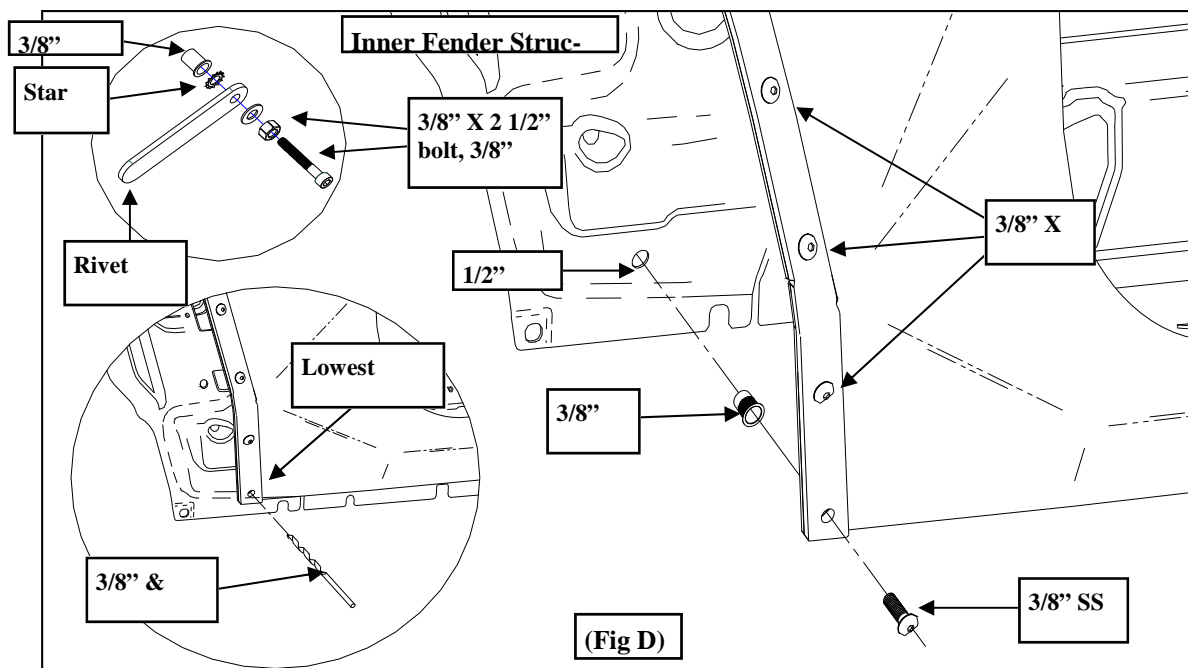

For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB76880)
XRC Armor Front Fender Kit

Step 15: Reinstall the fenders (93-5909 *drv*r and 93-5917 *pass*) and secure using the previously removed OE hardware. (Fig. E)

Step 16: Reinstall the previously removed side cowl panel to the inner fender structure using the supplied 3/16" X 1" self tapping screws. (Fig. F)



Step 17: Install the outer duct (93-5923) and the inner duct (93-5924 *drv*r and 93-5925 *pass*) to the fender using the 1/4"-20 X 3/4" stainless button head bolts. (Fig. G)

Step 18: Install the fender lip guard (93-5921 *drv*r and 93-5922 *pass*) to the outside of the wheel well using the supplied 3/8" X 1" stainless button head bolts. (Fig. D)

NOTE: The bottom fender lip guard bolt will align and install into the previously installed nutcert.

NOTE: Step 19 is for the passenger side fender Only!:

Step 19: Bolt the antenna base to the passenger side fender using the supplied (3) 10-24 X 1" socket head bolts. Reinstall the plastic base cap, reattach the antenna mast and reconnect

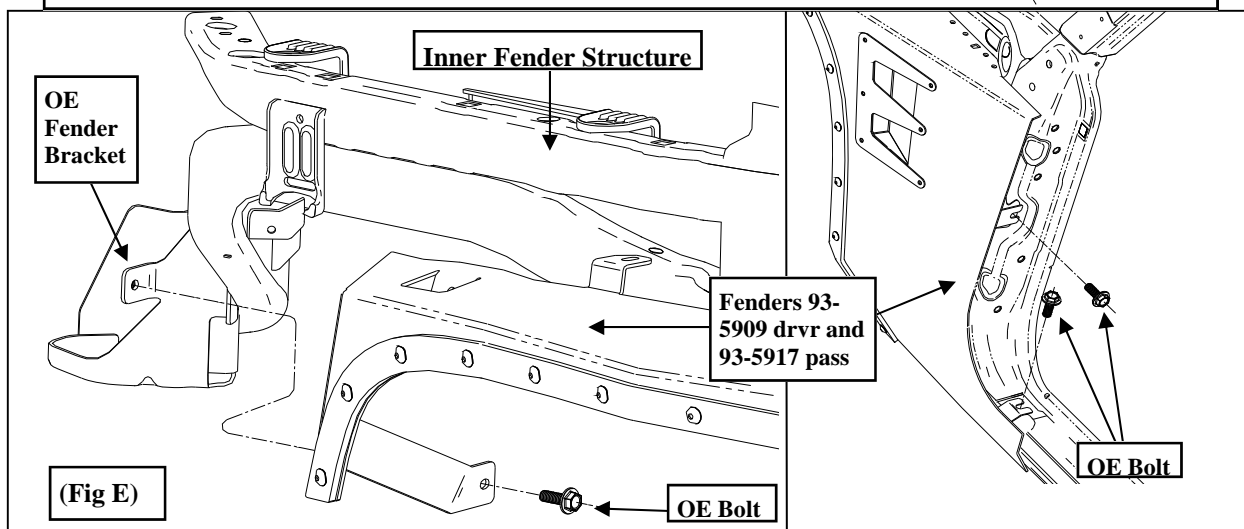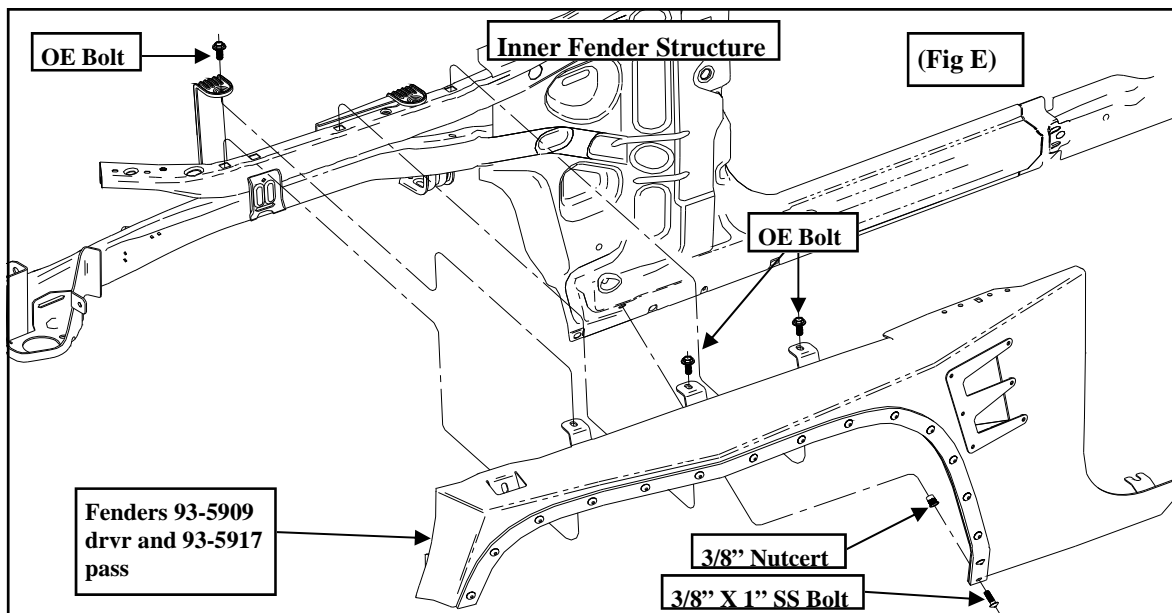


For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:


(Part # SB76880)
XRC Armor Front Fender Kit

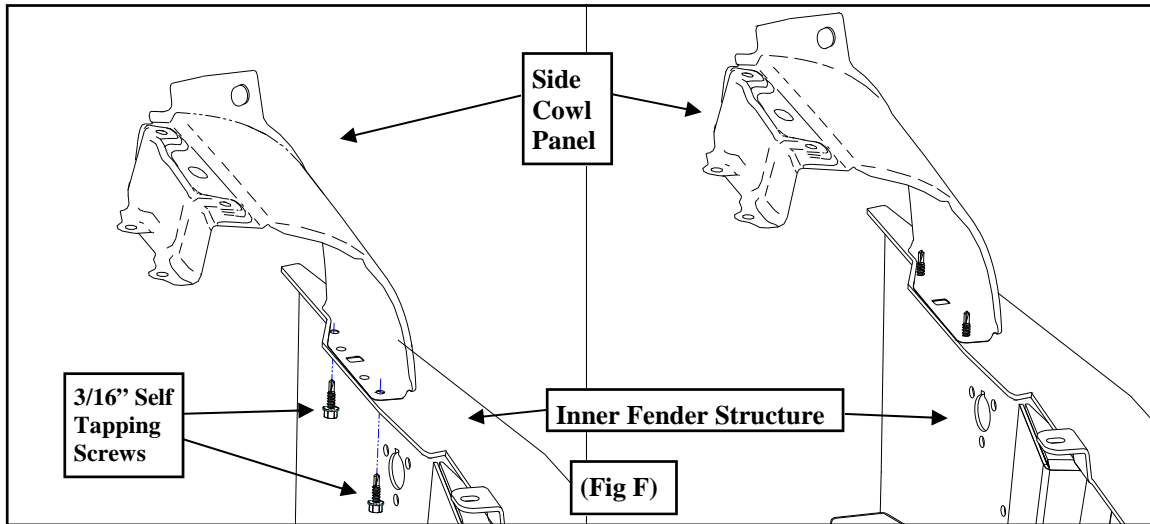

the antenna wiring. (Fig. G)

Step 20: The factory inner fender liners will need to be trimmed in order for the Smittybilt inner fender liners (90-4275 **drv**r and 90-4276 **pass**) to provide complete coverage. Trim the inner fender liner so it has approximately 1" of material sticking out past the front inner fender structure. This is only a starting point and further trimming may be necessary for a perfect fit. (Fig. H)

Step 21: Align the (2) large bolt holes in the OE inner fender liner and the supplied inner fender liner (90-4275 **drv**r and 90-4276 **pass**) and install into the inner fender structure using the (2) previously removed OE bolts. Install the plastic retainers into the outer edge of the inner fender liner starting from the middle of the fender working outward. (Fig. H)

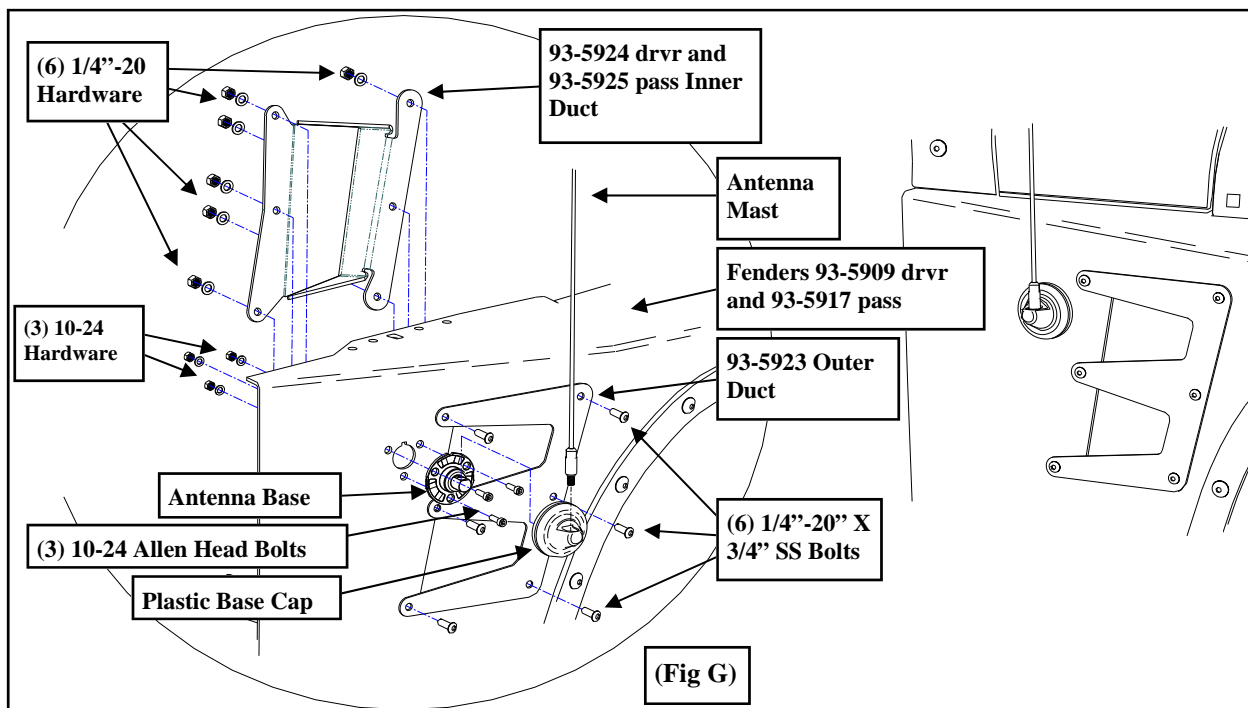

For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB76880)
XRC Armor Front Fender Kit

Step 22: While holding the inner fender liner into place install the rest of the plastic retainers.

NOTE: *The bottom portion of the inner fender liner will be sandwiched between the body and fender.*

Step 23: Reinstall the hood catch to the new fenders using the previously removed OE hardware. (Fig. I)


Step 24: Reinstall the windshield braces to the vehicle using the previously removed OE hardware. (Fig. A)

Step 25: Repeat the previous steps on the remaining side of the vehicle.

Step 26: reinstall the factory wiper cowl panel using the previously removed OE hardware.

Step 27: Reinstall the windshield wipers.

Step 28: Torque all OE hardware according to manufacturers specifications or the supplied hardware according to the torque chart below. Installation is now complete.

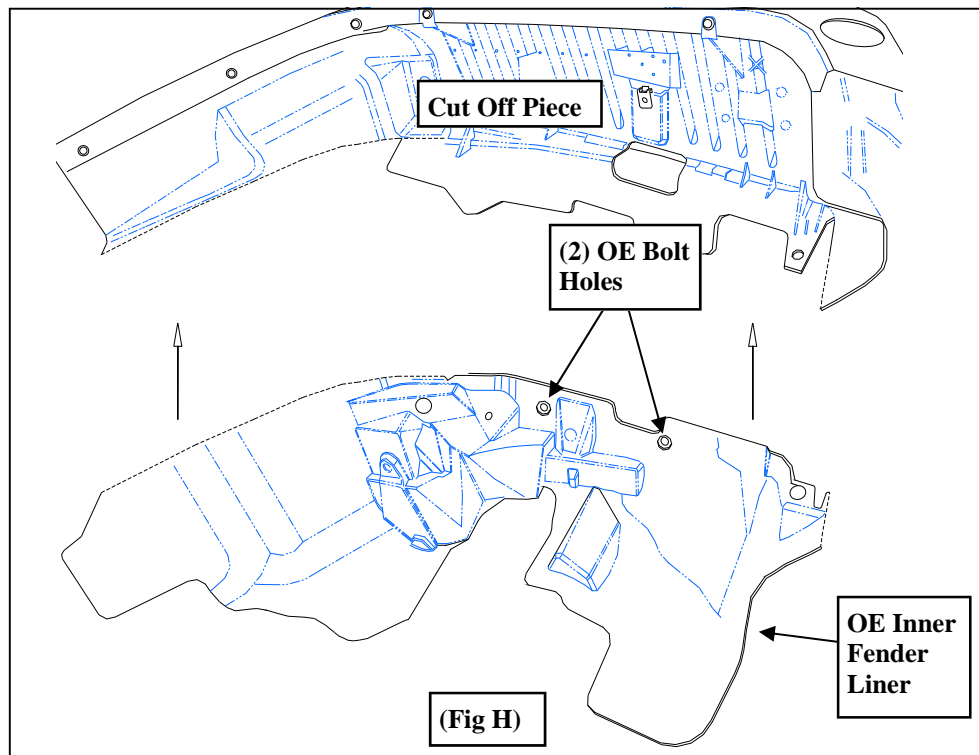


For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions:

(Part # SB76880)
XRC Armor Front Fender Kit

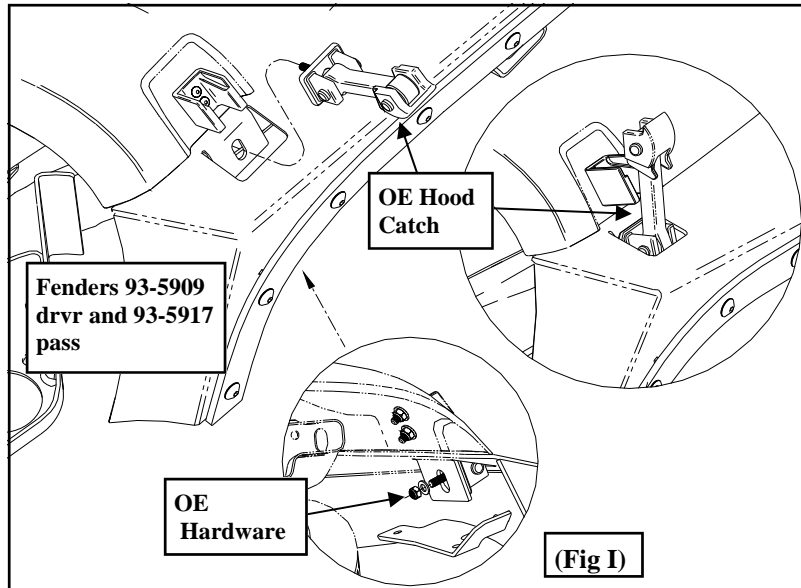

Bolt Torque and ID						
Decimal System			Metric System			
All Torques in Ft. Lbs.						
Bolt Size	Grade 5	Grade 8	Bolt Size	Class 9.8	Class 10.9	Class 12.9
5/16	15	20	M6	5	9	12
3/8	30	45	M8	18	23	27
7/16	45	60	M10	32	45	50
1/2	65	90	M12	55	75	90
9/16	95	130	M14	85	120	145
5/8	135	175	M16	130	165	210
3/4	185	280	M18	170	240	290

<p>1/2-13x1.75 HHCS</p> <p>D T L X</p>	<p>Grade 5 Grade 8</p> <p>(No. of Marks + 2)</p>	<p>M12-1.25x50 HHCS</p> <p>D T L X</p>
--	---	--

<p>G = Grade (Bolt Strength)</p> <p>D = Nominal Diameter (Inches)</p> <p>T = Thread Count (Threads per Inch)</p> <p>L = Length (Inches)</p> <p>X = Description (Hex Head Cap Screw)</p>	<p>P = Property Class (Bolt Strength)</p> <p>D = Nominal Diameter (Millimeters)</p> <p>T = Thread Pitch (Thread Width, mm)</p> <p>L = Length (Millimeters)</p> <p>X = Description (Hex Head Cap Screw)</p>
---	--

For Technical Support/Warranty Information please call 310-762-9944



Installation Instructions: *(Part # SB76880)* **XRC Armor Front Fender Kit**

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

Duration of Limited Warranty

Limited Lifetime Warranty on Stainless Steel Products -

Smittybilt stainless steel products carry the foregoing limited repair or replacement warranty against workmanship and defects in the material so long as the original purchaser retains the original stainless steel parts.

Limited Five (5) Year / 50,000 Mile Pro-Rata Warranty (whichever occurs first) on Dual-Stage Powder Coating Products -

Smittybilt dual-stage powder coated products carry the foregoing limited repair or replacement warranty for a period of (5) years or 50,000 miles (whichever occurs first) from date of purchase against workmanship and defects in the material, provided that any claim submitted after (2.5) years from date of purchase shall, if accepted, be satisfied by Smittybilt offering customer a credit on the purchase of a replacement product equal to fifty percent (50%) of customer's initial purchase price.

Limited Three (3) Year / 36,000 Mile Pro-Rata Warranty (whichever occurs first) on Chrome Products-

Smittybilt chrome products finished carry the foregoing limited repair or replacement warranty for a period of three (3) years or 36,000 miles against workmanship and defects in the material (whichever occurs first) from the date of purchase.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 W Artesia, Compton, CA 90220