



# 1.5" WHEEL SPACERS

(2007-2018 JK Wrangler)

---

## INSTALLATION INSTRUCTIONS

### CONTENTS

---

- (2) 1.5" Wheel Spacers
- (1) Red Thread Locker
- (10) Lug Nuts

### TOOLS REQUIRED

---

- Jack
- Jack Stands
- Lug Wrench
- Torque Wrench
- Wire Brush

SKU # J100792

**STEP 1**



Raise and support the vehicle using a jack and jack stands. Raise the vehicle so that the tires are just off the ground

**STEP 2**



Using a lug wrench, remove the wheel.




**STEP 3**

Using a wire brush, clean any loose rust from the axle hub.



**STEP 4**

Apply a drop of the supplied thread locker on each wheel stud.

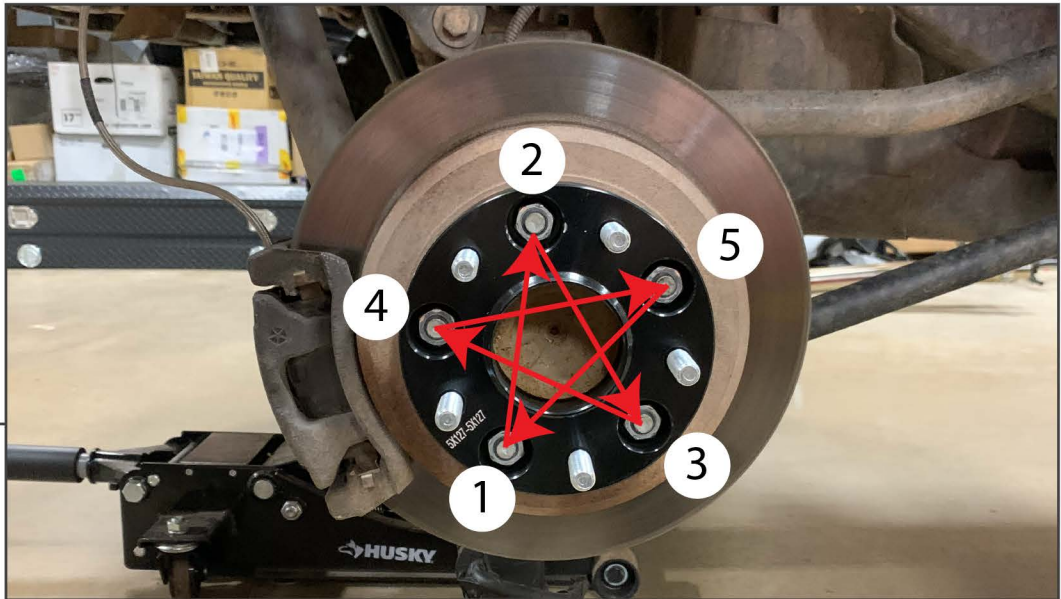

**STEP 5**

Install the wheel spacer using the supplied lug nuts. Tighten all lug nuts by hand in a star pattern. Then, torque the lug nuts in a star pattern to 95 lb. ft.



**STEP 6**

Reinstall the original wheel on the new studs. Torque the lug nuts in a star pattern to 95 lb. ft.