

AXIAL

Installation Instructions for 2007 - 2018 JK Halo LED Fog Lights

Contents:

- (2) Fog Lights
- (2) Fog Light Connectors
- (2) Splice Harnesses

Tools Required:

- Ratchet
- 8mm Socket
- Wire Crimping Tool



Step 1\\

Access the connectors on the rear of the fog lights from the wheel well, and remove. **Note: Light connector will be different between 07-09 and 10-18.




Step 2\\

Locate the (4) factory screws, and remove. **Note: Factory hardware will be reused.



Step 3\\

Install the new LED fog lights using the factory hardware.

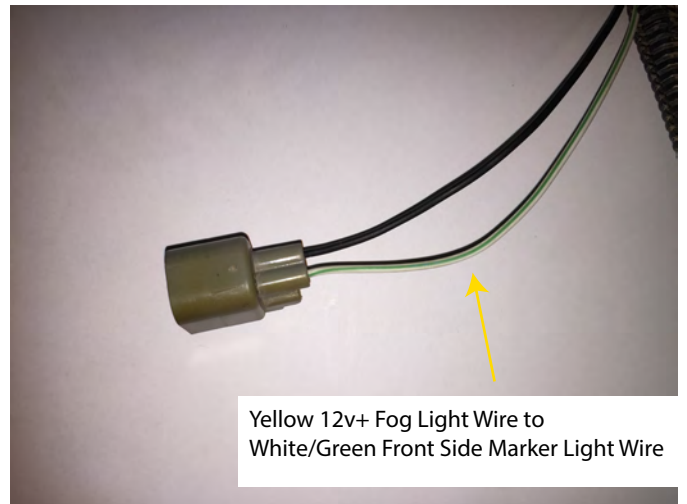

Step 4\\

Plug the supplied wiring harness into each factory fog light harness. The additional yellow wire will need to be spliced into the vehicle's factory wiring. Splice the yellow 12v+ fog light wire into the white/green front side marker light wire.

PRODUCT SKU: J130812/ J130813



Step 5

Test lights for proper function. Installation is now complete.